



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

### **Usage guidelines**

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

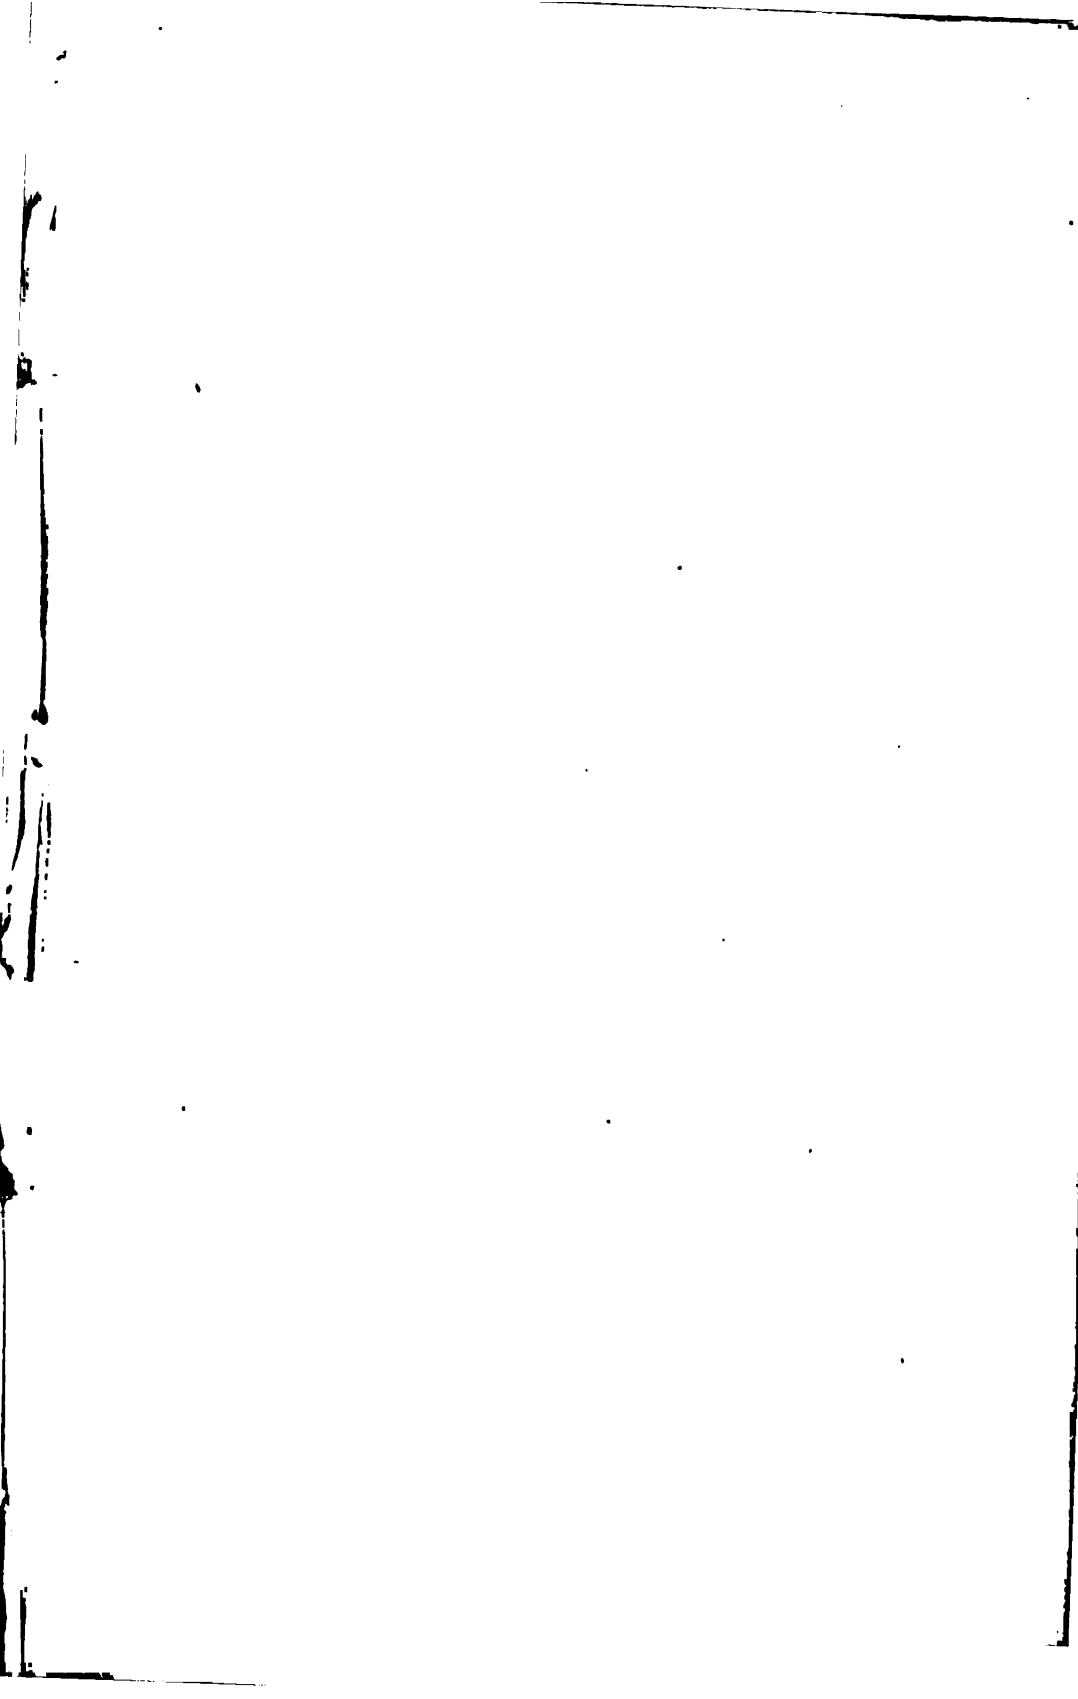
We also ask that you:


- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.


### **About Google Book Search**

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

**Library**  
of the  
**University of Wisconsin**









REPORT  
OF THE  
TESTS OF METALS  
AND  
OTHER MATERIALS  
FOR  
INDUSTRIAL PURPOSES,

MADE WITH THE  
UNITED STATES TESTING MACHINE AT WATERTOWN ARSENAL,  
MASSACHUSETTS,

DURING THE  
FISCAL YEAR ENDED JUNE 30, 1902.



WASHINGTON:  
GOVERNMENT PRINTING OFFICE.  
1903.





78687

MAY 4 1904

6137744

SDN

UN3

1902

LETTER

FROM

THE SECRETARY OF WAR,

TRANSMITTING,

**WITH A LETTER FROM THE CHIEF OF ORDNANCE, A COPY OF A REPORT OF THE TESTS OF IRON AND STEEL AND OTHER MATERIAL FOR INDUSTRIAL PURPOSES AT THE WATERTOWN ARSENAL.**

---

WAR DEPARTMENT,

*Washington, January 28, 1903.*

SIR: I have the honor to transmit herewith a letter dated January 24 instant, from the Chief of Ordnance, U. S. Army, together with a copy of the report of the commanding officer at Watertown Arsenal, of "tests of iron and steel and other material for industrial purposes," made at that arsenal during the fiscal year ended June 30, 1902.

Very respectfully,

ELIHU ROOT, *Secretary of War.*

The SPEAKER OF THE HOUSE OF REPRESENTATIVES.

---

OFFICE OF THE CHIEF OF ORDNANCE U. S. ARMY,

*Washington, January 24, 1903.*

SIR: I have the honor to submit, for transmission to Congress as required by law, a copy of the report of the commanding officer, Watertown Arsenal, of "tests of iron and steel and other material for industrial purposes," made at the Arsenal during the fiscal year ended June 30, 1902, which has just been received at this office.

Respectfully,

WILLIAM CROZIER,

*Brigadier-General, Chief of Ordnance*

The SECRETARY OF WAR.

WATERTOWN ARSENAL,  
*Watertown, Mass., January 20, 1903.*

SIR: I have the honor to submit herewith the annual report of tests of iron and steel and other materials made at this arsenal during the fiscal year ending June 30, 1902.

The total number of specimens tested during the year was 3,650, classified as follows:

Gun specimens.....	22
For Ordnance Department.....	373
For other Government departments.....	24
Investigative tests.....	2,539
Tests for private parties.....	692
<b>Total.....</b>	<b>3,650</b>

The receipts and expenditures were as follows:

Amount appropriated for testing machine and testing work.....	\$15,000.00
Received from private parties during the year.....	550.20
<b>Total received.....</b>	<b>15,550.20</b>
Amount expended for services and labor.....	12,535.04
Amount expended for light, power, tools, implements, and materials for test.....	3,001.30
Deposited to credit of Treasurer, United States.....	13.86
<b>Total expended.....</b>	<b>15,550.20</b>

The tests for the Ordnance Department comprise specimens from the different caliber guns of current fabrication and the material for carriages and for shot and shell. Forged steel, steel and iron castings, and bronze are represented in this group of material.

There were tests of retraction and buffer bracket hooks, also proof stresses applied to piston rods and retraction ropes.

Hydrostatic tests were made upon thin sections of gun hoops, showing the strength of metal containing so-called streaks and corresponding material which was without streaks.

In the tests of rocker and track blocks, high compressive stresses were applied to a cylindrically faced block of large radius of curvature, which rested upon flat blocks of different kinds of metal. The conditions approached those present in the cubic compression of metals, and stresses of great intensity were endured before permanent deformation occurred.

Two steel ingots were procured for investigative tests, one containing  $3\frac{1}{2}$  per cent nickel, the other none. In respect to other elements they were of similar composition, as nearly alike as practicable to obtain. A number of illustrations show the appearance of these ingots when cut apart. There are tensile tests on the metal in the natural state of the ingot, also after heating, quenching, and annealing, from which may be seen the wide range in physical properties a given metal may display. Under the influence of repeated alternate stresses similar results appear, showing that the endurance of the metal may be augmented by the same means which increase the tensile strength.

Endurance tests on different grades of steel have shown that alternate tensile and compressive fiber stresses as high as 50,000 pounds per square inch may, for a considerable time, be sustained by some bars.

Tests were made on suspender rods from the New York and Brooklyn Bridge. The characteristics of those rods, which have been in service since the construction of the bridge, are fully shown.

The investigative tests of cements have continued. A number of tests have been made on cements exposed to low temperatures while setting. The severity of the conditions attending these experiments were ameliorated over the early tests on this subject. Initial periods of setting at ordinary atmospheric temperatures preceded the interval in cold storage at zero F. The results indicate that low temperature has a retarding influence of greater or less degree on the acquisition of strength, notwithstanding the chemical reactions may have been initiated and a partial state of induration acquired under normal conditions of setting.

There were absorption determinations and tests on the elastic properties of dry-pressed and mud brick taken from several parts of the kiln, showing the influence of exposure to different temperatures of burning, according to their position in the kiln.

Transverse tests on Douglas fir and oak wood appear in the report; also the adhesive resistance of lag screws and bolts in those woods is shown. Observations on heat conductivity were carried on with sticks of Douglas fir exposed over wood fires, and final tests for strength made on the uncharred parts.

Chemical analyses were made on the tested material.

Tests for private parties, as provided for by law, have continued as in former years. A list of the parties for whom tests have been made is appended to the report.

Very respectfully, your obedient servant,

JOHN G. BUTLER,  
*Lieut. Col., Ordnance Department,*  
*U. S. Army, Commanding.*

The CHIEF OF ORDNANCE U. S. ARMY,  
*Washington, D. C.*



---

---

**REPORT**  
**OF THE**  
**TESTS OF METALS AND OTHER MATERIALS**  
**FOR**  
**INDUSTRIAL PURPOSES,**  
**MADE WITH THE**  
**UNITED STATES TESTING MACHINE AT WATERTOWN ARSENAL,**  
**MASSACHUSETTS,**  
**DURING THE**  
**FISCAL YEAR ENDED JUNE 30, 1902.**

---

---



## TABLE OF CONTENTS.

---

	Page
1. 75-millimeter mountain guns, body, breechblock and block carrier.....	11
2. 6-inch R. F. guns, tubes, jackets, hoops, and breechblocks .....	17
3. 10-inch steel B. L. rifles, tubes, jackets, hoops, and breechblocks .....	27
4. 12-inch steel B. L. rifles, jackets, hoops, and breechblocks .....	35
5. 16-inch steel B. L. rifle.....	45
6. Retraction and buffer bracket hooks .....	48
7. Piston rods and retraction ropes, proof stresses.....	48
8. Recoil cylinder, 12-inch mortar carriage.....	49
9. Reinforce plates, 12-inch mortar carriage.....	50
10. Steel shells for high explosives .....	50
11. Steel specimens for U. S. Navy .....	51
12. Steel yokes, U. S. Navy .....	53
13. Wrought iron for Engineer Corps, U. S. Army.....	58
14. Cast iron and pig irons .....	59
15. Bronze, gun carriage and ingot metal.....	65
16. Bronze from old 12-pounder guns.....	69
17. Extruded brass.....	82
18. Copper cylinders for pressure gauges .....	83
19. Helical springs .....	87
20. Shell, 12-inch mortar.....	99
21. Initial tension ring and tension tests, 16-inch shot.....	103
22. Hydrostatic tests, gun hoops.....	105
23. Rocker block and track blocks.....	121
24. Wrought iron .....	165
25. Metal from carbon and nickel steel ingots.....	197
26. Suspender rods, New York and Brooklyn Bridge .....	245
27. Endurance of rotating shafts.....	257
28. Chemical analyses, endurance shafts.....	277
29. Tensile specimens from ruptured endurance shafts.....	279
30. Absorption tests and elastic properties of bricks.....	337
31. Slate—slabs, cubes, and roofing.....	355
32. Cements and mortars.....	367
33. Concrete .....	513
34. Glass, transverse tests.....	515
35. Douglas fir and oak woods .....	519
36. Adhesion of lag screws in wood.....	563
37. Bits.....	579
38. Cartridge and target cloth.....	582
39. Blue print paper.....	583
40. Chemical analyses.....	585
41. Private tests.....	588






---

---

**SPECIMENS FROM STEEL FORGINGS FOR 75-MILLIMETER  
MOUNTAIN GUNS.**

---

---



## BODY.

No. 7473.

Marks, B<sup>4</sup> M

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00010	.00010	0.	0.	
10,000	.00035	.00025	.....	.....	
20,000	.00070	.00035	.....	.....	
30,000	.00105	.00035	.....	.....	
35,000	.00125	.00020	0.	0.	
40,000	.00145	.00020	.....	.....	
42,000	.00150	.00005	0.	0.	
47,000	.00185	.00085	.....	.....	
48,000	.00190	.00005	.....	.....	
49,000	.00200	.00010	.....	.....	Elastic limit.
50,000	.00250	.00060	.....	.....	
51,000	.00310	.00060	.....	.....	
52,000	.00390	.00080	.....	.....	
58,000	.00460	.00070	.....	.....	
54,000	.00670	.00110	.....	.....	Tensile strength.
97,100	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 97,100  
 Elastic limit per square inch of original section ..... do... 49,000  
 Elongation per inch after rupture ..... inch... .285  
 Elongation per inch under strain at elastic limit ..... do... .00200  
 Reduction in diameter at point of rupture ..... do... .135  
 Reduction in area after rupture, per cent of original section ..... 46.2  
 Position of rupture ..... 1".18 from neck  
 Character of broken surface ..... silky  
 Elongation of inch sections ..... ".19, ".28"

## BREECHBLOCK.

No. 7468.

Marks, <sup>74</sup>/<sub>52</sub>

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00015	.00015	.....	.....	
10,000	.00035	.00020	.....	.....	
20,000	.00070	.00035	.....	.....	
30,000	.00105	.00035	.....	.....	
40,000	.00145	.00040	0.	0.	
46,000	.00160	.00015	0.	0.	
50,000	.00175	.00015	.....	.....	
55,000	.00195	.00020	.....	.....	
57,000	.00200	.00005	.....	.....	
58,000	.00205	.00005	.....	.....	Elastic limit.
59,000	.00240	.00035	.....	.....	
60,000	.00275	.00035	.....	.....	
61,000	.00350	.00075	.....	.....	
62,000	.00500	.00150	.....	.....	
63,000	.00600	.00100	.....	.....	Tensile strength.
64,000	.00720	.00120	.....	.....	
103,900	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 103,900  
 Elastic limit per square inch of original section ..... do... 58,000  
 Elongation per inch after rupture ..... inch... .225  
 Elongation per inch under strain at elastic limit ..... do... .00205  
 Reduction in diameter at point of rupture ..... do... .155  
 Reduction in area after rupture, per cent of original section ..... 51.9  
 Position of rupture ..... ".70 from neck  
 Character of broken surface ..... silky  
 Elongation of inch sections ..... ".33\*, ".12

BLOCK CARRIER.

No. 7469.

Marks <sup>125</sup>/<sub>43</sub>

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00015	.00015	0.	0.	
10,000	.00035	.00020	.....	.....	
20,000	.00070	.00085	.....	.....	
30,000	.00105	.00085	.....	.....	
40,000	.00140	.00035	0.	0.	Elastic limit.
45,000	.00155	.00015	0.	0.	
50,000	.00170	.00015	.....	.....	
54,000	.00190	.00020	.....	.....	
55,000	.00195	.00005	.....	.....	
56,000	.00450	.00255	.....	.....	
57,000	.00600	.00150	.....	.....	
58,000	.00670	.00070	.....	.....	
59,000	.00770	.00100	.....	.....	
60,000	.00875	.00105	.....	.....	
61,000	.00950	.00075	.....	.....	
95,500	.....	.....	.....	.....	Tensile strength.


General summary.

Tensile strength per square inch of original section .....	pounds..	95,500
Elastic limit per square inch of original section .....	do...	55,000
Elongation per inch after rupture .....	inch..	.255
Elongation per inch under strain at elastic limit .....	do...	.00195
Reduction in diameter at point of rupture .....	do...	.165
Reduction in area after rupture, per cent of original section .....	.....	54.6
Position of rupture .....	1" 10 from neck	
Character of broken surface .....	silky	
Elongation of inch sections .....	" .33" .18	

TABULATION OF TENSION SPECIMENS FOR 75-MILLIMETER R. F. MOUNTAIN GUNS.

STEMS 3" LONG, ".505 DIAMETER.

No. of test.	Position in gun.	Location of specimens.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Remarks.
			<i>Pounds.</i>	<i>Pounds.</i>	<i>Per ct.</i>	<i>Per ct.</i>		
7478	Body .....	Middle	49,000	97,100	23.5	46.2	Silky .....	Breech end.
7468	Breechblock .....	.....	58,000	108,900	22.5	51.9	.....do.....	
7469	Block carrier .....	.....	55,000	95,500	25.5	54.6	.....do.....	



---

---

**6-INCH R. F. GUNS.**

---

**SPECIMENS FROM TUBES, JACKETS, HOOPS,  
AND BREECHBLOCK.**

---

---





TUBE.

No. 7448.

Marks, <sup>6 R F, T</sup><sub>M 1, M</sub>

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.00010	.00010	0.	0.		
10,000	.00035	.00025				
20,000	.00060	.00025				
30,000	.00100	.00040				
35,000	.00115	.00015	0.	0.		
40,000	.00130	.00015				
42,000	.00140	.00010	0.	0.		
50,000	.00160	.00020				Elastic limit.
51,000	.00190	.00030				
52,000	.00215	.00025				
53,000	.00250	.00035				
54,000	.00345	.00095				
55,000	.00450	.00105			Tensile strength.	
98,000						

General summary.

Tensile strength per square inch of original section .....	pounds..	98,000
Elastic limit per square inch of original section .....	do...	50,000
Elongation per inch after rupture .....	inch..	.205
Elongation per inch under strain at elastic limit .....	do...	.00160
Reduction in diameter at point of rupture .....	do...	.115
Reduction in area after rupture, per cent of original section .....		40.3
Position of rupture .....	"	.65 from neck
Character of broken surface .....	granular 60 per cent, silky 40 per cent	
Elongation of inch sections .....	"	.29", ".12

## TUBE.

No. 7449.

Marks, <sup>G R F, T</sup>  
<sub>M T, M</sub>  
 Diameter,  $\frac{1}{2}$  inch.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.00010	.00010	0.	0.		
10,000	.00035	.00025	0.	0.		
20,000	.00070	.00085	0.	0.		
30,000	.00105	.00085	0.	0.		
35,000	.00120	.00015	0.	0.		
40,000	.00135	.00015	0.	0.		
42,000	.00140	.00005	0.	0.		
50,000	.00170	.00030				Elastic limit.
51,000	.00175	.00005				
52,000	.00200	.00025				
53,000	.00225	.00025				
54,000	.00315	.00090				
55,000	.00475	.00160			Tensile strength.	
56,000	.00620	.00145				
93,250						

*General summary.*

Tensile strength per square inch of original section.....pounds.. 93,250  
 Elastic limit per square inch of original section .....do... 51,000  
 Elongation per inch after rupture .....inch... .145  
 Elongation per inch under strain at elastic limit.....do... .00175  
 Reduction in diameter at point of rupture.....do... .055  
 Reduction in area after rupture, per cent of original section.....do... 20.5  
 Position of rupture.....do... 1".08 from neck  
 Character of broken surface..... granular, a belt of flaky metal across surface  
 Elongation of inch sections.....do... ".14, ".16\*

## JACKET.

No. 7444.

Marks, <sup>6 R F # J</sup><sub>M T, O</sub>

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000067	.000067	0.	0.	
10,000	.000267	.000200	0.	0.	
20,000	.000600	.000833	0.	0.	
30,000	.000833	.000833	0.	0.	
40,000	.001267	.000834	0.	0.	Elastic limit.
46,000	.001433	.000166	0.	0.	
52,000	.001633	.000200			
53,000	.001700	.000067			
54,000	.002000	.000800			
55,000	.002333	.000333			Tensile strength.
56,000	.003300	.000967			
57,000	.004000	.000700			
58,000	.005000	.001000			
99,680					

*General summary.*

Tensile strength per square inch of original section .....	pounds..	99,680
Elastic limit per square inch of original section .....	do...	53,000
Elongation per inch after rupture .....	inch...	.20
Elongation per inch under strain at elastic limit .....	do...	.001700
Reduction in diameter at point of rupture .....	do...	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....	"	4 from neck
Character of broken surface .....		silky
Elongation of inch sections .....	"	.19, ".31*, ".10

## JACKET.

No. 7445

Marks, <sup>6 R F J</sup><sub>M T 6</sub>  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000300	.000200	.....	.....	
20,000	.000633	.000533	.....	.....	
30,000	.000967	.000834	.....	.....	
40,000	.001300	.000833	0.	0.	Elastic limit.
46,000	.001500	.000200	0.	0.	
51,000	.001667	.000167	.....	.....	
52,000	.008300	.001633	.....	.....	
53,000	.004600	.001300	.....	.....	
54,000	.006833	.001233	.....	.....	Tensile strength.
55,000	.006333	.000600	.....	.....	
56,000	.007667	.001334	.....	.....	
91,920	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 91,920  
 Elastic limit per square inch of original section ..... do... 51,000  
 Elongation per inch after rupture ..... inch... .24  
 Elongation per inch under strain at elastic limit ..... do... .001667  
 Reduction in diameter at point of rupture ..... do... .174  
 Reduction in area after rupture, per cent of original section ..... 52.2  
 Position of rupture ..... 1".41 from neck  
 Character of broken surface ..... silky  
 Elongation of inch sections ..... ".14, ".38\*, ".20

## JACKET.

No. 7461.

Marks, 22433 B,  
B T, M

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3."

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
1,000	0.	0.	0.	0.	Initial load.
5,000	.000123	.000123	0.	0.	
10,000	.000333	.000240	0.	0.	
20,000	.000700	.000667	.....	.....	
30,000	.001087	.000867	.....	.....	
40,000	.001400	.000883	0.	0.	
45,000	.001633	.000233	0.	0.	
50,000	.001733	.000100	.....	.....	
55,000	.001833	.000200	.....	.....	
57,000	.002000	.000067	.....	.....	
58,000	.002233	.000033	.....	.....	Elastic limit.
59,000	.002100	.000067	.....	.....	
60,000	.006533	.004583	.....	.....	
61,000	.007167	.000584	.....	.....	
62,000	.008400	.001233	.....	.....	
63,000	.009333	.000583	.....	.....	Tensile strength.
64,000	.010267	.001234	.....	.....	
97,120	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section .....	pounds..	97,120
Elastic limit per square inch of original section .....	do...	59,000
Elongation per inch after rupture .....	inch...	.21
Elongation per inch under strain at elastic limit .....	do...	.002100
Reduction in diameter at point of rupture .....	do...	.174
Reduction in area after rupture, per cent of original section .....		52.2
Position of rupture .....	"	.96 from neck
Character of broken surface .....		slky
Elongation of inch sections .....	"	.37, ".14, ".12

HOOP.

No. 7450.

Marks, <sup>21900 R.</sup>  
 B T, M  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000133	.000133	0.	0.	
10,000	.000300	.000167	.....	.....	
20,000	.000667	.000367	.....	.....	
30,000	.001000	.000333	.....	.....	
40,000	.001367	.000367	.....	.....	Elastic limit.
45,000	.001500	.000133	0.	0.	
50,000	.001733	.000233	0.	0.	
58,000	.002033	.000300	.....	.....	
59,000	.002067	.000034	.....	.....	
60,000	.005000	.002933	.....	.....	Tensile strength.
61,000	.005333	.000333	.....	.....	
62,000	.006667	.000334	.....	.....	
63,000	.007267	.000600	.....	.....	
64,000	.008333	.001066	.....	.....	
108,800	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section .....	pounds..	108,800
Elastic limit per square inch of original section .....	do...	59,000
Elongation per inch after rupture .....	inch...	.19
Elongation per inch under strain at elastic limit .....	do...	.002067
Reduction in diameter at point of rupture .....	do...	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....		1" 1 from neck
Character of broken surface .....		silky, cup shaped
Elongation of inch sections .....		".11, ".20 ".26"

BREECHBLOCK.

No. 7447.

Marks, <sup>22849 B<sub>3</sub></sup><sub>T, M</sub>

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00010	.00010	0.	0.	
10,000	.00035	.00025	.....	.....	
20,000	.00065	.00030	.....	.....	
30,000	.00100	.00035	.....	.....	
40,000	.00135	.00035	0.	0.	
45,000	.00155	.00020	.....	.....	
50,000	.00175	.00020	.....	.....	
51,000	.00185	.00010	.....	.....	
52,000	.00950	.00765	.....	.....	
53,000	.01015	.00065	.....	.....	
54,000	.01070	.00055	.....	.....	
55,000	.01150	.00080	.....	.....	
56,000	.01250	.00100	.....	.....	Tensile strength.
97,000	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section .....	pounds..	97,000
Elastic limit per square inch of original section .....	do.....	51,000
Elongation per inch after rupture .....	inch..	.23
Elongation per inch under strain at elastic limit .....	do...	.00185
Reduction in diameter at point of rupture .....	do...	.125
Reduction in area after rupture, per cent of original section .....	.....	43.3
Position of rupture .....	"5 from neck	
Character of broken surface .....	silky	
Elongation of inch sections .....	"32*, ".14	

TABULATION OF TENSION SPECIMENS FROM 6-INCH R. F. GUNS.

STEMS OF SPECIMENS FROM TUBES AND BREECHBLOCK 2" LONG, ".505 DIAMETER; FROM JACKETS AND HOOP 3" LONG, ".564 DIAMETER.

No. of test.	Position in gun.	Location of specimens.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Remarks.
			<i>Pounds.</i>	<i>Pounds.</i>	<i>Per ct.</i>	<i>Per ct.</i>		
7448	Tube ...	Middle	50,000	98,000	20.5	40.3	Granular, 60 per cent; silky, 40 per cent.	Muzzle end.
7449	....do....	....do....	51,000	93,250	14.5	20.5	Granular, a belt of flaky metal across surface.	Do.
7444	Jacket..	Outside.	53,000	99,680	20.0	44.6	Silky.....	Do.
7445	....do....	....do....	51,000	91,920	24.0	52.2	....do.....	Do.
7461	....do....	Middle	59,000	97,120	21.0	52.2	....do.....	Breech end.
7450	Hoop ...	....do....	59,000	108,800	19.0	44.6	Silky, cup shaped....	Do.
7447	Breech-block.	Middle	51,000	97,000	23.0	43.3	Silky.....	





---

---

**10-INCH STEEL B. L. RIFLES.**

---

**SPECIMENS FROM TUBES, JACKETS, HOOPS, AND  
BREECHBLOCKS.**

---

---



TUBE.

No. 7470.

Marks, <sup>20633 B,</sup>  
M T<sub>2</sub> M  
Diameter, " .564.  
Sectional area, .25 square inch.  
Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000133	.000133	0.	0.		
10,000	.000333	.000200				
20,000	.000667	.000334				
30,000	.001000	.000333				
35,000	.001188	.000133	0.	0.		
40,000	.001333	.000200	0.	0.		
45,000	.001467	.000134				
46,000	.001583	.000066				
47,000	.001600	.000067				Elastic limit.
48,000	.002100	.000500				
49,000	.003167	.001067				
50,000	.006000	.002833				
51,000	.006333	.000333				
52,000	.007167	.000834				
53,000	.007833	.000666				
90,320					Tensile strength.	

General summary.

Tensile strength per square inch of original section.....	pounds..	90,320
Elastic limit per square inch of original section.....	do.....	47,000
Elongation per inch after rupture.....	inch.....	.193
Elongation per inch under strain at elastic limit.....	do.....	.001000
Reduction in diameter at point of rupture.....	do.....	.104
Reduction in area after rupture, per cent of original section.....		33.5
Position of rupture.....	"	90 from neck
Character of broken surface.....	granular 80 per cent, flaky 20 per cent	
Elongation of inch sections.....	"	.14, .17, .27*

JACKET.

No. 7446.

Marks, <sup>10806 B<sub>2</sub></sup>  
 B T<sub>2</sub> M  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3."

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000100	.000100	0.	0.		
10,000	.000300	.000200	.....	.....		
20,000	.000633	.000533	.....	.....		
30,000	.000967	.000834	.....	.....		
35,000	.001133	.001166	0.	0.		
40,000	.001300	.001167	.....	.....		
42,000	.001367	.000067	0.	0.		
44,000	.001500	.000133	.....	.....		
45,000	.003500	.002000	.....	.....		Elastic limit.
46,000	.006000	.002500	.....	.....		
47,000	.006367	.000367	.....	.....		
48,000	.007467	.001100	.....	.....		
49,000	.008233	.000766	.....	.....		
86,800	.....	.....	.....	.....	Tensile strength.	

General summary.

Tensile strength per square inch of original section .....	pounds..	86,800
Elastic limit per square inch of original section .....	do...	44,000
Elongation per inch after rupture .....	inch..	.23
Elongation per inch under strain at elastic limit .....	do...	.001500
Reduction in diameter at point of rupture .....	do...	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....	" 9 from neck	
Character of broken surface .....	.....	silky
Elongation of inch sections.....	" 37", " 21, " 11	

JACKET.

No. 7467.

Marks, <sup>29122 B</sup><sub>M T, M</sub>

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000133	.000133	0.	0.	
10,000	.000333	.000200	.....	.....	
20,000	.000667	.000334	.....	.....	
30,000	.001000	.000366	.....	.....	
35,000	.001200	.000167	0.	0.	
40,000	.001400	.000200	.....	.....	
42,000	.001467	.000067	0.	0.	
50,000	.001767	.000300	.....	.....	
57,000	.002033	.000266	.....	.....	
58,000	.002267	.000234	.....	.....	
59,000	.002267	.007000	.....	.....	
60,000	.010000	.000733	.....	.....	
61,000	.010933	.000933	.....	.....	Tensile strength.
62,000	.011667	.000734	.....	.....	
92,320	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section .....	pounds..	92,320
Elastic limit per square inch of original section .....	do..	57,000
Elongation per inch after rupture .....	inch..	.22
Elongation per inch under strain at elastic limit .....	do..	.002033
Reduction in diameter at point of rupture .....	do..	.164
Reduction in area after rupture, per cent of original section .....		49.7
Position of rupture .....	at the middle of the stem	
Character of broken surface .....	silky	
Elongation of inch sections .....	#.14, #.39, #.18	

## HOOP.

No. 7465.

Marks, <sup>11241 B<sub>7</sub></sup>  
B T<sub>1</sub> M

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000133	.000133	0.	0.		
10,000	.000333	.000200	.....	.....		
20,000	.000667	.000334	.....	.....		
30,000	.001000	.000366	.....	.....		
40,000	.001337	.000334	.....	.....		
45,000	.001567	.000200	0.	0.		
50,000	.001700	.000133	0.	0.		Elastic limit.
60,000	.002100	.000400	.....	.....		
61,000	.002233	.000133	.....	.....		
62,000	.003000	.002767	.....	.....		
63,000	.003667	.001067	.....	.....		
64,000	.007067	.001000	.....	.....		
65,000	.007833	.000766	.....	.....		
101,680	.....	.....	.....	.....	Tensile strength.	

*General summary.*

Tensile strength per square inch of original section .....	pounds..	101,680
Elastic limit per square inch of original section .....	do...	60,000
Elongation per inch after rupture .....	inch..	.20
Elongation per inch under strain at elastic limit .....	do...	.002100
Reduction in diameter at point of rupture .....	do...	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....	" .95 from neck	
Character of broken surface .....	silky 60 per cent, granular 40 per cent	
Elongation of inch sections .....	" .11, ".17, ".32*	

BREECHBLOCK.

No. 7464.

Marks, <sup>17522 B<sub>s</sub></sup><sub>T, M</sub>  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3."

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive Permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000100	.000100	0.	0.		
10,000	.000300	.000200	.....	.....		
20,000	.000667	.000867	.....	.....		
30,000	.001000	.000833	.....	.....		
40,000	.001367	.000867	0.	0.		
46,000	.001600	.000233	.000033	.000083		
47,000	.001667	.000067	.....	.....		Elastic limit.
48,000	.001733	.000066	.....	.....		
49,000	.002000	.000267	.....	.....		
50,000	.002267	.001267	.....	.....		
51,000	.004067	.000800	.....	.....		
52,000	.004600	.000633	.....	.....		
53,000	.005133	.000633	.....	.....		
97,640	.....	.....	.....	.....	Tensile strength.	

General summary.

Tensile strength per square inch of original section .....	pounds..	97,640
Elastic limit per square inch of original section .....	do...	48,000
Elongation per inch after rupture .....	inch...	.187
Elongation per inch under strain at elastic limit .....	do...	.001733
Reduction in diameter at point of rupture .....	do...	.104
Reduction in area after rupture, per cent of original section .....		33.5
Position of rupture .....		1 3/4 from neck
Character of broken surface.....	silky 40 per cent, fine granular 60 per cent; opened cracks in stem in vicinity of place of fracture.	
Elongation of inch sections .....		".18, ".25*, ".13

TABULATION OF TENSION SPECIMENS FROM 10-INCH STEEL B. L. RIFLES.

STEMS 3" LONG, ".564 DIAMETER.

No. of test.	Position in gun.	Location of specimens.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Remarks.
			<i>Pounds.</i>	<i>Pounds.</i>	<i>Per ct.</i>	<i>Per ct.</i>		
7470	Tube .....	Middle	47,000	90,320	19.3	33.5	Granular, 80 per cent; flaky, 20 per cent.	Muzzle end.
7446	Jacket .....	do	44,000	86,800	23.0	44.6	Silky .....	Breech end.
7467	do .....	do	57,000	92,320	22.0	49.7	do .....	Muzzle end.
7465	Hoop .....	do	60,000	101,680	20.0	44.6	Silky, 60 per cent; granular, 40 per cent.	Breech end.
7464	Breechblock. ....	do	48,000	97,640	18.7	33.5	Silky, 40 per cent; fine granular, 60 per cent.	





---

---

**12-INCH STEEL B. L. RIFLES.**

---

**SPECIMENS FROM TUBES, JACKETS, HOOPS, AND  
BREECHBLOCKS.**

---

---



TUBE.

No. 7454.

Marks, <sup>12 B</sup> <sub>BT, O</sub> T

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000300	.000200	.....	.....	
20,000	.000633	.000333	.....	.....	
30,000	.000967	.000384	.....	.....	
35,000	.001133	.000166	0.	0.	
40,000	.001367	.000284	.000033	.000033	
47,000	.001667	.000300	.....	.....	
48,000	.001733	.000066	.....	.....	
49,000	.001767	.000084	.....	.....	
50,000	.001867	.000100	.....	.....	
51,000	.002000	.000133	.....	.....	
52,000	.002400	.000400	.....	.....	
53,000	.002733	.000333	.....	.....	
54,000	.003600	.000867	.....	.....	Tensile strength.
55,000	.004333	.000733	.....	.....	
56,000	.005167	.000634	.....	.....	
89,160	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section .....	pounds..	89,160
Elastic limit per square inch of original section .....	do..	49,000
Elongation per inch after rupture .....	inch..	.177
Elongation per inch under strain at elastic limit .....	do..	.001767
Reduction in diameter at point of rupture .....	do..	.164
Reduction in area after rupture, per cent of original section .....		49.7
Position of rupture .....		" .75 from neck
Character of broken surface .....		silky
Elongation of inch sections .....		".06, ".11, ".36"

TUBE.

No. 7463.

Marks, <sup>24269 B,</sup> M T, M  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000300	.000200	.....	.....	
20,000	.000333	.000333	.....	.....	
30,000	.001000	.000367	.....	.....	
35,000	.001167	.000167	0.	0.	Elastic limit.
40,000	.001367	.000200	0.	0.	
45,000	.001567	.000200	.....	.....	
47,000	.001667	.000100	.....	.....	
48,000	.006888	.005166	.....	.....	
49,000	.007600	.000767	.....	.....	
50,000	.008333	.000733	.....	.....	
51,000	.009000	.000667	.....	.....	
52,000	.010000	.001000	.....	.....	
58,000	.010733	.000733	.....	.....	
87,200	.....	.....	.....	.....	Tensile strength.

General summary.

Tensile strength per square inch of original section .....	pounds..	87,200
Elastic limit per square inch of original section .....	do..	47,000
Elongation per inch after rupture .....	inch..	.238
Elongation per inch under strain at elastic limit .....	do..	.001667
Reduction in diameter at point of rupture .....	do..	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....		1".25 from neck
Character of broken surface .....		silky
Elongation of inch sections .....		".26, ".29, ".15

JACKET.

No. 7451.

Marks, <sup>12 R, J</sup><sub>M T, O</sub>

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000067	.000067	0.	0.	
10,000	.000267	.000200	-----	-----	
20,000	.000600	.000333	-----	-----	
30,000	.000933	.000333	-----	-----	
35,000	.001100	.000167	0.	0.	
40,000	.001267	.000167	-----	-----	
42,000	.001333	.000066	0.	0.	
50,000	.001667	.000334	-----	-----	
51,000	.001733	.000066	-----	-----	
52,000	.001867	.000134	-----	-----	
53,000	.001967	.000100	-----	-----	
54,000	.002167	.000200	-----	-----	
55,000	.002300	.000633	-----	-----	Tensile strength.
56,000	.004667	.001967	-----	-----	
98,600	-----	-----	-----	-----	

General summary.

Tensile strength per square inch of original section .....	pounds..	98,600
Elastic limit per square inch of original section .....	do....	51,000
Elongation per inch after rupture .....	inch	.17
Elongation per inch under strain at elastic limit .....	do....	.001733
Reduction in diameter at point of rupture .....	do....	.144
Reduction in area after rupture, per cent of original section .....		44.6
Position of rupture .....		".70 from neck
Character of broken surface .....	silky, trace of granulation	
Elongation of inch sections .....		".09, ".11, ".31*

## JACKET.

No. 7460.

Marks, <sup>2446 B</sup><sub>M T<sub>2</sub> M</sub>  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000133	.000133	0.	0.	
10,000	.000300	.000167	.....	.....	
20,000	.000667	.000367	.....	.....	
30,000	.001000	.000333	.....	.....	
35,000	.001167	.000167	0.	0.	
40,000	.001367	.000200	.....	.....	
42,000	.001433	.000066	0.	0.	
45,000	.001533	.000100	.....	.....	
50,000	.001700	.000167	.....	.....	
51,000	.001733	.000033	.....	.....	
52,000	.009333	.007600	.....	.....	
53,000	.009900	.000667	.....	.....	
54,000	.010667	.000767	.....	.....	
55,000	.011367	.000700	.....	.....	
56,000	.012333	.000966	.....	.....	
57,000	.012967	.000634	.....	.....	Tensile strength.
91,920	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 91,920  
 Elastic limit per square inch of original section ..... do... 51,000  
 Elongation per inch after rupture ..... inch... .237  
 Elongation per inch under strain at elastic limit ..... do... .001733  
 Reduction in diameter at point of rupture ..... do... .154  
 Reduction in area after rupture, per cent of original section..... 47.2  
 Position of rupture ..... 1".40 from neck  
 Character of broken surface ..... silky  
 Elongation of inch sections ..... ".14, ".35\*, ".22

JACKET.

No. 7466.

Marks, <sup>22402 B<sub>1</sub></sup>  
M T, M  
Diameter, ".564.  
Sectional area, .25 square inch.  
Gauged length, .3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000133	.000133	0.	0.	
10,000	.000333	.000200	.....	.....	
20,000	.000667	.000334	.....	.....	
30,000	.001000	.000333	.....	.....	
35,000	.001133	.000133	0.	0.	
40,000	.001333	.000200	.....	.....	
42,000	.001367	.000034	0.	0.	
43,000	.001433	.000066	.....	.....	
44,000	.001500	.000067	.....	.....	
45,000	.001567	.000066	.....	.....	
46,000	.002333	.000766	.....	.....	
47,000	.004167	.001834	.....	.....	
48,000	.005100	.000933	.....	.....	
49,000	.005667	.000667	.....	.....	
50,000	.006767	.001100	.....	.....	Tensile strength.
91,160	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section ..... pounds.. 91,160  
Elastic limit per square inch of original section ..... do... 45,000  
Elongation per inch after rupture ..... inch.. .167  
Elongation per inch under strain at elastic limit ..... do... .001567  
Reduction in diameter at point of rupture ..... do... .094  
Reduction in area after rupture, per cent of original section ..... 30.6  
Position of rupture ..... 1".2 from neck  
Character of broken surface ..... granular, silky spot at the circumference  
Elongation of inch sections ..... ".17, ".23\*, ".10

## HOOP.

No. 7462.

Marks, <sup>2564 B</sup><sub>M T, M</sub>

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000300	.000200	.....	.....	
20,000	.000667	.000867	.....	.....	
30,000	.001033	.000866	.....	.....	
40,000	.001367	.000894	.....	.....	
45,000	.001588	.000166	0.	0.	
50,000	.001700	.000167	0.	0.	
60,000	.002333	.000333	.....	.....	
62,000	.002100	.000067	.....	.....	
63,000	.002167	.000067	.....	.....	Elastic limit.
64,000	.002500	.000333	.....	.....	
65,000	.003333	.002333	.....	.....	
66,000	.007267	.001994	.....	.....	
67,000	.007833	.000566	.....	.....	
68,000	.009000	.001167	.....	.....	Tensile strength.
102,800	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section.....	pounds..	102,800
Elastic limit per square inch of original section.....	do..	63,000
Elongation per inch after rupture.....	inch..	.197
Elongation per inch under strain at elastic limit.....	do..	.002167
Reduction in diameter at point of rupture.....	do..	.164
Reduction in area after rupture, per cent of original section.....		49.7
Position of rupture.....	1" .22 from neck	
Character of broken surface.....	.....	silky
Elongation of inch sections.....	" .11, ".23, ".25*	



BREECHBLOCK.

No. 7453.

Marks, <sup>24564 B<sub>2</sub></sup>  
 M T<sub>3</sub> M  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000133	.000133	0.	0.	
10,000	.00067	.000234	.....	.....	
20,000	.000767	.000400	.....	.....	
30,000	.001133	.000866	.....	.....	
35,000	.001333	.000200	.000033	.000033	
40,000	.001500	.000167	.000033	0.	
50,000	.001933	.000433	.....	.....	
54,000	.002133	.000200	.....	.....	
55,000	.002200	.000067	.....	.....	
56,000	.006833	.003633	.....	.....	
57,000	.010167	.004334	.....	.....	
58,000	.011333	.001166	.....	.....	
59,000	.012167	.000894	.....	.....	Tensile strength.
60,000	.014333	.002166	.....	.....	
87,200	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section ..... pounds.. 87,200  
 Elastic limit per square inch of original section ..... do... 55,000  
 Elongation per inch after rupture ..... inch... 227  
 Elongation per inch under strain at elastic limit ..... do... 0.02200  
 Reduction in diameter at point of rupture ..... do... .124  
 Reduction in area after rupture, per cent of original section ..... 41.9  
 Position of rupture ..... 1".25 from neck  
 Character of broken surface ..... silky  
 Elongation of inch sections ..... ".24, ".32, ".12

TABULATION OF TENSION SPECIMENS FROM 12-INCH STEEL B. L. RIFLES.

STEMS 3' LONG, ".564 DIAMETER.

No. of test.	Position in gun.	Location of specimens.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Remarks.
			Pounds.	Pounds.	Per ct.	Per ct.		
7454	Tube .....	Outside.	49,000	89,160	17.7	49.7	Silky .....	Breech end.
7453	.....do .....	Middle.	47,000	87,200	23.3	44.6	.....do .....	Muzzle end.
7451	Jacket .....	Outside.	51,000	93,600	17.0	44.6	Silky, trace of granulation.	Do.
7460	.....do .....	Middle.	51,000	91,920	23.7	47.2	Silky	Do.
7466	.....do .....	.....do .....	45,000	91,160	16.7	30.6	Granular, silky spot at circumference.	Do.
7462	Hoop .....	.....do .....	63,000	102,800	19.7	49.7	Silky	Do.
7453	Breechblock.	.....do .....	55,000	87,200	22.7	41.9	.....do .....	Do.



---

---

**16-INCH STEEL B. L. RIFLE.**

---

**SPECIMEN FROM FORGING FROM WATERVLIET  
ARSENAL.**

---

---



No. 7442.

16" RIFLE FORGING.

Diameter, ".505.

Sectional area, .20 square inch.

Gauged length, 1".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0001	0.	
10,000	.0002		
20,000	.0004		
30,000	.0008	0.	
40,000	.0011		
50,000	.0013		
60,000	.0016		
65,000	.0018		
70,000	.0020		
80,000	.0023		Elastic limit, approximate, not well defined.
82,000	.0024		
83,000	.0026		
84,000	.0030		
85,000	.0032		
86,000	.0034		
87,000	.0038		
88,000	.0040		
89,000	.0042		
90,000	.0047	.0013	
91,000	.0052		
92,000	.0057		
94,000	.0062		
96,000	.0072		
98,000	.0081		
100,000	.0091		
102,000	.0101		
104,000	.0112		
113,400			Tensile strength.

*General summary.*

Tensile strength per square inch of original section .....	pounds..	113,400
Elastic limit per square inch of original section, approximate.....	do...	82,000
Elongation per inch after rupture .....	inch..	.02
Elongation per inch under strain at elastic limit .....	do...	.0024
Reduction in diameter at point of rupture .....	do...	.006
Reduction in area after rupture, per cent of original section .....		1.8
Position of rupture.....		
Character of broken surface .....	fine granular, radiating from a point in the circumference	
Elongation of inch section.....		".02

## RETRACTION AND BUFFER BRACKET HOOKS FOR 10-INCH BARBETTE CARRIAGE.

## STEEL CASTINGS.

## RETRACTION HOOK.

Measurements for distortion of hook taken from point of hook to fixed block in testing machine.

Applied loads.	Distortion of hook.	Applied loads.	Distortion of hook.
<i>Pounds.</i>	<i>Inch.</i>	<i>Pounds.</i>	<i>Inch.</i>
1,000	0.	16,000	.21
5,000	.08	17,000	.25
10,000	.10	18,000	.28
1,000	.02	19,000	.32
15,000	.19	20,000	.38
1,000	.08	1,000	.22

## BUFFER BRACKET.

1,000	0.	18,000	.40
5,000	.08	19,000	.43
10,000	.19	20,000	.52
15,000	.30	20,000	.57 after 5 minutes.
1,000	.11	20,000	.58 after 10 minutes.
16,000	.32	1,000	.34
17,000	.35		

A part of the apparent distortion of the hook is attributed to the partial shearing of the 1-inch bolts securing the bracket to the testing fixture.

## PISTON RODS AND RETRACTION ROPES.

## PISTON RODS.

## PROOF STRESSES APPLIED TO PISTON RODS FOR GUN CARRIAGES.

Description.	Tensile stress applied.
	<i>Pounds.</i>
75-millimeter Vicker-Maxim mountain gun carriage .....	12,500
15-pounder Driggs-Seabury R. F. gun carriage .....	131,966
5-inch R. F. B. L. rifle carriage .....	100,000
8-inch disappearing carriage, model 1896 .....	72,000
10-inch disappearing carriage .....	125,000
12-inch disappearing carriage .....	150,000
12-inch barbette carriage .....	279,128

## WIRE RETRACTION ROPES.

## PROOF STRESSES APPLIED TO WIRE RETRACTION ROPES FOR GUN CARRIAGES.

Description.	Tensile stress applied.
	<i>Pounds.</i>
$\frac{1}{2}$ -inch steel wire retraction ropes with conical sockets, for 8-inch disappearing carriages .....	7,080
$\frac{3}{8}$ -inch steel wire retraction ropes with conical sockets, for 10-inch disappearing carriages .....	8,800
$\frac{1}{2}$ -inch steel wire retraction ropes with conical sockets, for 12-inch disappearing carriages .....	15,000

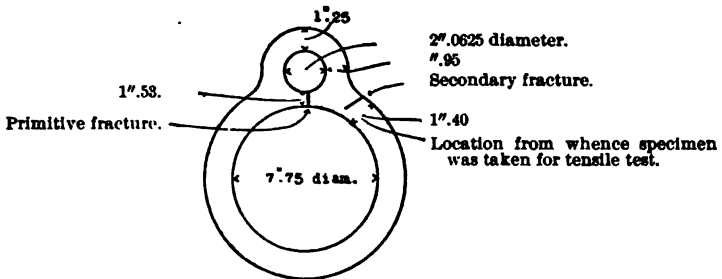
RECOIL CYLINDER, 12-INCH MORTAR CARRIAGE.

Steel from fractured casting from Fort Preble, Me.  
 Specimen taken longitudinally near secondary fracture.  
 Gauged length, 3".

No. of test.	Diameter.	Sectional area.	Elastic limit.		Ultimate strength.		Elongation in 3 inches.		Contraction of area.
			Total.	Per square inch.	Total.	Per square inch.	Inch.	Per cent.	
10481	Inch. 0.564	Square inch. 0.25	Pounds. 7,800	Pounds. 29,200	Pounds. 16,950	Pounds. 67,800	Inch. 0.90	Per cent. 30	Per cent. 27.4

Appearance of fracture ..... oblique; silky and granular metal miter mingled.  
 Elongation of inch sections ..... ".25, ".38, ".27

DESCRIPTION OF FRACTURES IN THE CASTING.



The primitive fracture, in the wall between the main cylinder and the auxiliary, presented a granular appearance, radiating from spongy metal near the surface of the bore of the main cylinder. The spongy metal extended over a length of 18"±, and at its maximum, was ".85 deep from the surface of the bore, thus leaving about ".68 thickness of sound metal beyond, at the worst place. There were several small, spongy spots in the surface of the bore in this vicinity, ranging in diameter from ".01 to ".02.

A secondary fracture was formed at the junction of the two cylinders, extending inward from the exterior surface of the casting, in depth nearly, but not quite, reaching the surface of the bore. This fracture had its origin at a spongy spot about ".35 deep, on the outside of the casting.

The tensile specimen was taken out longitudinally from the walls of the cylinder adjacent to the secondary fracture.

## REINFORCING PLATE, 12-INCH MORTAR CARRIAGE.

Forged steel.  
Gauged length, 5'.

No. of test.	Diameter.	Sectional area.	Elastic limit.		Ultimate strength.		Elongation in 5 inches.		Area at fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
			Total.	Per square inch.	Total.	Per square inch.	Inch.	Per cent.				
10491	Inches. 1.009	Sq inch. .8	Pounds. 30,100	Pounds. 37,680	Pounds. 58,060	Pounds. 72,560	Inch. .91	Per cent. 18.2	Sq. inch. .630	Per cent. 18.8	Silky, 20 per cent; granular, 80 per cent.	".19*, ".20, ".19, ".18, ".15,

## METAL FOR STEEL SHELLS FOR HIGH EXPLOSIVES, FROM THE U. S. PROJECTILE COMPANY.

Description of specimens: B<sub>1</sub> Drawn steel. Seven-inch steel shell for high explosives. B<sub>2</sub> and B<sub>3</sub> Rolled steel. Billet for 3" 2 shell for high explosives.

No. of test.	Mark on specimen.	Diameter.	Sectional area.	Elastic limit.		Ultimate strength.		Elongation in 2 inches.		Area at fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
				Total.	Per square inch.	Total.	Per square inch.	Inch.	Per cent.				
10424	B <sub>1</sub>	Inch. .965	Sq inch. .20	Pounds. 8,500	Pounds. 44,500	Pounds. 21,560	Pounds. 107,750	Inch. .80	Per cent. 13.0	Sq. inch. .199	Per cent. 20.5	Fine granular	".14*, .16*
10425	B <sub>2</sub>	.965	.20	a 13,200	66,000	54,500	137,500	.18	9.0	.169	20.5	.....	.06, .12*
10426	B <sub>3</sub>	.965	.20	a 13,100	65,500	28,250	131,500	.19	9.5	.166	17.0	.....	.07, .12*

a Approximate.



STEEL SPECIMENS FROM BUREAU OF ORDNANCE, U. S. NAVY.

No. of test.	Mark on specimen.	Diam-eter.	Sectional area.	Elastic limit.		Ultimate strength.		Elongation in 2 inches.		Area at fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
				Total.	Per square inch.	Total.	Per square inch.	Inch.	Per cent.				
10433	B 11-1	.500	Sq. inch. .196	Pounds. 6,900	35,200	Pounds. 17,650	90,050	.87	18.5	Sq. inch. .189	Per cent. 29.1	Granular, 60 per cent; silky center, 40 per cent.	" " .13, .24*
10434	B 1-2	.500	.196	6,950	35,460	17,540	89,480	.34	17.0	.182	32.7	Granular, 70 per cent; silky, 80 per cent.	.23*, .11
10435	B 111-3	.500	.196	6,980	35,610	17,520	89,380	.34	17.0	.189	29.1	.....do .....	.11, .23*



---

---

**STEEL FOR YOKES**  
**FROM THE**  
**BUREAU OF ORDNANCE, UNITED STATES NAVY.**

---

---



STEEL FOR YOKES.

No. 7439.

Marks, <sup>B 1</sup><sub>III</sub>  
 Diameter, ".500.  
 Sectional area, .196 square inch.  
 Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00010	.00010	0.	0.	
10,000	.00020	.00010	.....	.....	
20,000	.00060	.00040	0.	0.	
30,000	.00105	.00045	0.	0.	
35,000	.00120	.00015	.....	.....	Elastic limit.
36,000	.00340	.00220	.....	.....	
37,000	.00385	.00045	.....	.....	
38,000	.00450	.00065	.....	.....	
39,000	.00510	.00060	.....	.....	
40,000	.00565	.00065	.....	.....	Tensile strength.
87,550	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section.....pounds.. 87,550  
 Elastic limit per square inch of original section.....do... 35,000  
 Elongation per inch after rupture.....inch.. .20  
 Elongation per inch under strain at elastic limit.....do... .00120  
 Reduction in diameter at point of rupture.....do... .080  
 Reduction in area after rupture, per cent of original section..... 29.1  
 Position of rupture..... 1".1 from neck  
 Character of broken surface..... granular 60 per cent, silky 40 per cent  
 Elongation of inch sections..... ".23, ".17

STEEL FOR YOKES.

No. 7440.

Marks, <sup>B 2</sup><sub>III</sub>  
 Diameter, ".500.  
 Sectional area, .196 square inch.  
 Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00010	.00010	0.	0.	
10,000	.00020	.00010	0.	0.	
20,000	.00055	.00035	.....	.....	
30,000	.00100	.00045	0.	0.	
34,000	.00115	.00015	.....	.....	Elastic limit.
35,000	.00210	.00095	.....	.....	
36,000	.00300	.00090	.....	.....	
37,000	.00425	.00125	.....	.....	
38,000	.00510	.00085	.....	.....	
39,000	.00575	.00065	.....	.....	
40,000	.00660	.00085	.....	.....	Tensile strength.
80,400	.....	.....	.....	.....	

General summary.

Tensile strength per square inch of original section ..... pounds.. 80,400  
 Elastic limit per square inch of original section ..... do... 34,000  
 Elongation per inch after rupture ..... inch... .085  
 Elongation per inch under strain at elastic limit ..... do... .0015  
 Reduction in diameter at point of rupture ..... do... .040  
 Reduction in area after rupture, per cent of original section ..... 15.3  
 Position of rupture ..... ".76 from neck  
 Character of broken surface ..... granular, radiating from a dull, silky spot in the circumference  
 Elongation of inch sections ..... ".10", ".07

STEEL FOR YOKES.

No. 7441

Marks, <sup>B 3</sup>  
 III  
 Diameter, ".500.  
 Sectional area, .196 square inch.  
 Gauged length, 2".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.00010	.00010	0.	0.	
10,000	.00030	.00020			
20,000	.00060	.00080			
30,000	.00100	.00040	0.	0.	
34,000	.00115	.00015			Elastic limit.
35,000	.00140	.00025			
36,000	.00165	.00025			
37,000	.00590	.00425			
38,000	.00625	.00035			
39,000	.00660	.00035			
40,000	.00715	.00055			
85,700					Tensile strength.

General summary.

Tensile strength per square inch of original section .....	pounds..	85,700
Elastic limit per square inch of original section .....	do....	34,000
Elongation per inch after rupture .....	inch....	.19
Elongation per inch under strain at elastic limit .....	do....	.00115
Reduction in diameter at point of rupture .....	do....	.050
Reduction in area after rupture, per cent of original section .....		18.9
Position of rupture .....	"	88 from neck
Character of broken surface .....	granular, 60 per cent; silky, 40 per cent	
Elongation of inch sections .....	"	.17, ".21*

TABULATION OF TENSION SPECIMENS FROM STEEL FOR YOKES.  
Gauged length, 2".

No. of test.	Mark on specimen.	Diameter.	Sectional area.	Elastic limit per square inch.	Ultimate strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
7439	B <sub>1</sub> , III	.500	Sq. in. 35,000	Pounds. 87,550	Per cent. 29.1	Per cent. 20.0	Granular, 60 per cent; silky, 40 per cent	" "	.28*.17
7440	B <sub>2</sub> , III	.500	.196 34,000	80,400	8.5	15.8	Granular, radiating from a dull silky spot at the circumference	" "	.10*.07
7441	B <sub>3</sub> , III	.500	.196 34,000	85,700	19.0	18.9	Granular, 60 per cent; silky, 40 per cent	" "	.17, .21*

WROUGHT IRON FOR ENGINEER CORPS, U. S. ARMY.  
MATERIAL FOR CRANE DERRICK.

No. of test.	Diameter.	Sectional area.	Elastic limit.		Ultimate strength.		Elongation.	Area at fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
			Total.	Per square inch.	Total.	Per square inch.					
10440	Inches. 1.25	Sq. in. 1.227	Pounds. 37,600	Pounds. 30,640	Pounds. 59,900	Pounds. 48,740	Per cent. 12.2	Sq. in. .650	Per cent. 47.0	Fibrous	" 09, " 08, " 09, " 10, " 10, " 10, " 11, " 09, " 12, " 19, " 25, " 11, " 09, " 10, " 09, " 10, " 10, " 10, " 11, " 11, " 11.
10441	1.25	1.227	38,100	31,050	60,100	48,990	10.2	.650	47.0	do	" "

WROUGHT IRON, BENT, BUT STRAIGHTENED HOT BEFORE TESTING.

10627	1.0092	.80	25,900	31,630	48,320	54,150	26.7	.503	37.1	Fibrous; trace of granulation.	" 14, " 33*, " 33*.
-------	--------	-----	--------	--------	--------	--------	------	------	------	--------------------------------	---------------------



---

---

**CAST IRON AND PIG IRONS.**


**TENSION TESTS AND CHEMICAL ANALYSES.**

---

---



CAST IRON FROM WATERTOWN ARSENAL FOUNDEY.



No. of test.	Description.	Chemical composition.						Tensile strength per square inch.	Fracture.	Specific gravity.	
		Carbon.		Manga- nese.	Silicon.	Sul- phur.	Phos- phorus.				Copper.
		Total.	Graph- itic.								
6570	3" shell							Pounds	Fine granular, gray		
6571	do							28,080	do		
6572	do							27,890	do		
6573	do							29,280	do		
6574	do							28,840	do		
6575	do							27,860	do		
6576	do							33,840	Fine granular, light gray		
6577	do	3.061	2.536	.545	.392	1.680	.074	30,320	do		
6581	do							29,160	Fine granular, gray		
6582	do							27,520	do		
6583	do							29,440	do		
6584	do							23,620	do		
6585	6-pounder shell							25,600	do		
6588	do							25,750	do		
6589	do							26,000	do		
6590	do							26,000	do		
6596	do							27,920	do		
6597	do							23,620	do		
6595	15-pounder shell							26,600	do	7.106	
6588	do							26,600	do	7.161	
6589	do							29,750	do		
6590	do							26,000	do		
6596	do							28,360	do		
6597	do							27,920	do		
6700	do							24,800	do		
6701	do							25,100	do		
6702	do							26,060	do		
6703	do								do	7.139	

CAST IRON FROM WATERTOWN ARSENAL FOUNDRY—Continued.

No. of test.	Description.	Chemical composition.						Tensile strength per square inch.	Fracture.	Specific gravity.	
		Carbon.		Manga-nese.	Silicon.	Sul-phur.	Phos-phorus.				Copper.
		Total.	Graph-itic.								
6704	15-pounder shell.							Pounds.			
6705	do.							23,200	Fine granular, gray	7.156	
6706	do.							24,700	do.	7.224	
6707	do.							23,600	do.	7.063	
6708	do.							28,500	Fine granular, light gray	7.051	
6709	do.							28,500	do.	7.189	
6710	do.							24,500	do.	7.134	
6711	do.							25,050	Granular, gray	7.044	
6712	do.							27,980	Fine granular, light gray	7.000	
6713	12" shell							27,700	Fine granular, light gray		
6714	do.							28,650	Fine granular, light gray		
6715	do.							28,010	Fine granular, light gray, granitic		
6716	do.							27,610	do.		
6717	do.							27,280	Fine granular, light gray		
6718	do.							26,450	do.		
6719	do.							27,500	do.		
6720	do.							27,100	do.		
6721	do.							26,990	Granular, gray granitic	7.173	
6722	do.							25,150	Granular, gray	7.218	
6723	do.							28,340	Fine granular, gray	7.232	
6724	do.							28,800	Fine granular, light gray	7.232	
6725	do.							27,820	Fine granular, light gray, granitic	7.311	
6726	do.							28,690	Fine granular, light gray		
6727	do.							27,850	do.		
6728	do.							28,340	do.		
6729	do.							30,110	do.		
6730	do.							26,950	Granular, gray, mottled	7.246	
6731	do.							28,470	Granular, gray	7.274	
6732	do.							29,400	Granular, gray	7.232	
6733	do.							29,400	do.	7.090	
6734	do.							32,330	Very fine granular, gray	7.145	
6735	do.							29,200	do.	7.217	
6736	do.							27,100	Fine granular, gray	7.291	
6737	do.							29,560	Granular, gray	7.148	
6738	do.							24,750	Fine granular, light gray	7.287	
6739	do.							28,570	Fine and coarse granular, light gray	7.059	
6740	do.							28,570	Fine granular, light gray	7.279	
6741	16" shot							26,700	Fine and coarse granular, gray, granitic	7.254	

6765	do	80,440	Granular, gray	7,176
6770	do	28,600	Fine granular, light gray	7,206
6771	do	27,700	Coarse granular, gray	7,219
6772	do	28,830	Fine and coarse granular, gray	7,222
6773	do	29,300	Granular, gray	7,168
6774	do	25,100	Fine and coarse granular, light gray	7,185
6775	do	28,900	Fine granular, light gray	7,047
6776	do	21,100	Coarse granular, gray	7,160
6777	do	30,510	Fine granular, light gray	7,153
6778	do	26,540	Granular, gray	7,165
6780	do	29,600	Fine granular, light gray	7,063
6706	1 1/2" barrette carriage	28,300	Fine granular, gray	7,205
6779	10" disappearing carriage	29,210	Fine granular, light gray	7,064
6729	1 1/2" disappearing carriage	26,050	Fine granular, light gray, dark spot at edge	7,232
6737	do	26,950	Granular, gray, mottled	7,090
6738	do	28,470	Granular, gray	7,217
6744	do	32,330	Very fine granular, gray	7,199
6762	do	30,500	Very fine granular, light gray, bright spots	7,176
6765	do	30,410	Granular, gray	7,205
6779	do	29,210	Fine granular, light gray	7,217
67-4	1 1/2" mortar carriage	32,880	Very fine granular, gray	7,217

Pig IRONS.

6763	Muirkirk pig	20,250	Fine and coarse granular, dark gray	7,107
6764	do	18,300	do	7,161

MISCELLANEOUS.

6680	Track block	29,900	Fine granular, light gray, mottled	
6694	Specimen from fractured traversing intermediate bevel gear from Buffalo	20,300	Fine granular, gray	
6695	do	19,250	do	

FROM PETERSBURG IRON WORKS.

6675	Projectile	28,350	Fine granular, light gray	7,269
6676	do	28,200	do	7,364
6750	8" and 12" shot and shell	22,690	Granular, light gray, granitic	
6753	do	23,920	do	
6754	do	29,080	do	

FROM CITY OF BOSTON.

No. of test.	Description.	Chemical composition.						Tensile strength per square inch.	Fracture.	Specific gravity.	
		Carbon.		Manga-nese.	Silicon.	Sul-phur.	Phos-phorus.				Copper.
		Total.	Graph-itic.								
6686	4 3/4" water pipe.....										
6692	do.....						<i>Founds.</i> 19,300	Fine granular, gray.....			
6693	do.....						17,200	do.....			
							19,500	do.....			

FOR CALIBRATION OF TESTING MACHINE AT WORKS OF ROBERT POOLE & SON CO.

6740	No. 7-U 5503.....						24,410	Fine granular, gray.....		
6741	No. 7-L 5505.....						24,820	do.....		

RACER OF 12" MORTAR CARRIAGE No. 125, RECEIVED FROM FORT STEVENS.

6716	From left side of center of racer, near fracture. Position of specimen, vertical.						31,150	Fine granular, light gray, mottled.....		7.215
6717	Same, except position horizontal.						30,330	do.....		7.260
6718	Same, position not given.						28,230	do.....		7.246
6719	From right hand side of racer, near fracture.						26,700	do.....		7.288
6720	From right side of center of racer, position of specimen vertical.						27,090	do.....		7.259
6721	Same except position horizontal.						30,000	do.....		7.249

---

---


# BRONZE.

---

GUN CARRIAGE AND INGOT METAL.


---

---






BRONZE FROM ARSENAL FOUNDRY.



Marks.	Description.	Diameter.	Sectional area.	Tensile strength per square inch.	Elongation.	Contraction of area.	Fracture.
9	Melts from phosphor-bronze ingot metal.	Inches, .664	Sq. inch, .26	Pounds, 48,200	Per ct, 16.6	Per ct, 16.0	Dull golden yellow.
11	76-millimeter mountain gun carriage	1.01 x .813	.816	41,610	20.0	16.8	Lavender and golden yellow.
12	do	1.02 x .825	.829	37,080	8.6	12.8	Do.
13	do	1.02 x .815	.821	34,880	8.0	9.3	Do.
14	do	.98 x .775	.772	34,180	12.6	11.3	Do.
15	do	1.01 x .805	.807	38,000	12.0	8.1	Do.
16	do	1.01 x .804	.807	38,000	8.8	13.6	Do.
17	do	1.02 x .822	.825	37,080	8.8	11.9	Do.
18	do	1.01 x .807	.800	39,000	7.0	11.3	Golden yellow, spongy spot.
N	do	1.01 x .81	.813	61,020	8.0	17.3	Lavender yellow, spongy spot.
P	do	1.03 x .82	.880	56,640	8.0	19.4	Golden yellow, spongy spot.
M	do	1.00 x .80	.800	51,880	9.0	4.3	Do.
19	do	1.01 x .88	.288	32,160	7.0	14.1	Lavender and golden yellow.
20	do	1.02 x .87	.275	35,270	8.5	7.3	Do.
21	do	1.02 x .89	.296	38,610	6.5	9.8	Do.
22	do	1.03 x .88	.340	38,240	10.6	12.6	Do.
23	do	1.04 x .82	.888	30,540	9.5	6.9	Do.
24	do	1.02 x .80	.806	38,400	8.6	11.8	Do.
25	do	1.00 x .80	.800	32,480	6.5	12.7	Do.



---

---

**BRONZE FROM OLD 12-POUNDER GUNS IN STORE  
AT WATERTOWN ARSENAL.**

---

**SPECIMENS FROM THE GUNS, AND RECAST METAL  
FROM THE SAME.**

---

---



The metal from each of three 12-pounder bronze guns in store at Watertown Arsenal were examined for physical properties, and chemical analyses of the material were made.

For identification the guns were marked 1, 2, and 3. They were branded as follows:

No.	Legenda.	
	Breech.	Muzzle, in part.
1	H. N. Hooper & Co., No. 345.....	1, 235 pounds C. C. 1864.
2	C. A. & Co., No. 166.....	1, 235 pounds T. J. R. 1863.
3	Revere Copper Co., No. 440.....	1, 230 pounds R. M. H. 1864.

The guns were cut into sections in the lathe and longitudinal segments taken out by the planer, and from the latter tensile specimens were turned down, from which the original properties of the metal were ascertained. Subsequently the metal from each of guns Nos. 1 and 2 were remelted and cast into ingots in iron molds, from whence tensile specimens were taken. Finally, metal from guns Nos. 2 and 3 were melted, tin and zinc added, and tensile specimens taken from the ingots which these mixtures furnished. Chemical analyses, specific gravity, and hardness determinations were made on the original metal taken directly from the guns.

It appears that the metal is approximately the so-called gun metal, 88, 10, and 2 mixture in the piece branded H. N. H. & Co.; a 90 Cu, 10 Sn mixture in the C. A. & Co. gun, and 90 Cu, 8 Sn, 2 Zn mixture in the R. C. Co. piece. In tensile strength the original metal from the guns ranged between the limits of 35,000 and 47,000 pounds per square inch; when recast, between 32,000 and 43,000 pounds per square inch, and after the addition of tin and zinc, 33,000 to 39,000 tensile strength was obtained.

## CHEMICAL ANALYSES.

Gun No.	End.	Marks.	Copper.	Tin.	Zinc.	Iron.
1...	Breech .....	H. N. Hooper & Co .....	88.63	9.57	1.80	Trace.
1...	Muzzle .....	do.....	88.85	9.40	1.75	Trace.
2...	Breech .....	C. A. & Co .....	90.65	9.35	Trace.	.....
2...	Muzzle .....	do.....	90.50	9.50	Trace.	.....
3...	Breech .....	Revere Copper Co.....	90.90	7.60	1.50	.....
3...	Muzzle .....	do.....	90.77	7.75	1.48	.....

SPECIMENS TAKEN FROM LONGITUDINAL SLICES FROM THE GUN.

GUN No. 1, BREECH END.

Diameter, 1".129.

Sectional area, 1.00 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.			Initial load.
2,000	.00007	.00007			
3,000	.00014	.00007			
4,000	.00021	.00007			
5,000	.00028	.00007	0.	0.	
6,000	.00035	.00007			
7,000	.00042	.00007			
8,000	.00049	.00007			
9,000	.00055	.00006			
10,000	.00062	.00007	0.	0.	
11,000	.00070	.00008			
12,000	.00077	.00007			
13,000	.00085	.00008			
14,000	.00093	.00008			
15,000	.00106	.00012	.00012	.00012	
16,000	.00122	.00017			
17,000	.00151	.00029			
18,000	.00200	.00049			Tensile strength.
19,000	.00420	.00220			
19,000	.00500	.00080	.00385	.00373	
39,800	-----	-----			

General summary.

Tensile strength per square inch of original section .....	pounds..	39,800
Elastic limit per square inch of original section .....	do...	14,000
Elongation per inch after rupture .....	inch...	.225
Elongation per inch under strain at elastic limit .....	do...	.00093
Reduction in diameter at point of rupture .....	do...	.119
Reduction in area after rupture, per cent of original section .....		19.9
Character of broken surface .....		uniform, dull lavender yellow
Elongation of inch sections .....		" .21, " .22, " .22, " .23, " .23, " .22, " .23, " .27*, " .22, " .20

## GUN NO. 1, MUZZLE END.

Diameter, 1".009.

Sectional area, .800 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.			Initial load.
2,000	.00007	.00007			
3,000	.00013	.00006			
4,000	.00020	.00007			
5,000	.00029	.00009	0.	0.	
6,000	.00035	.00006			
7,000	.00042	.00007			
8,000	.00050	.00008			
9,000	.00057	.00007			
10,000	.00066	.00009	0.	0.	
11,000	.00072	.00006			Elastic limit.
12,000	.00082	.00010			
13,000	.00090	.00008	.00001	.00001	
14,000	.00100	.00010			
15,000	.00118	.00018	.00015	.00014	
16,000	.00145	.00027			Tensile strength.
17,000	.00205	.00060			
18,000	.00500	.00295			
19,000	.01080	.00580			
20,000	.01600	.00570	.01458	.01443	
41,440					

*General summary.*

Tensile strength per square inch of original section .....pounds.. 41,440  
 Elastic limit per square inch of original section .....do... 14,000  
 Elongation per inch after rupture .....inch.. .337  
 Elongation per inch under strain at elastic limit .....do... .00100  
 Reduction in diameter at point of rupture.....do... .159  
 Reduction in area after rupture, per cent of original section..... 29.1  
 Character of broken surface..... uniform, golden yellow  
 Elongation of inch sections ..... ".33, ".31, ".32, ".31, ".32, ".31, ".33, ".34, ".35, ".45, broke in the neck

## GUN No. 2, BREECH END.

Diameter, 1".129.

Sectional area, 1 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.			Initial load.
2,000	.00007	.00007			
3,000	.00012	.00005			
4,000	.00019	.00007			
5,000	.00026	.00007	0.	0.	
6,000	.00031	.00005			
7,000	.00039	.00008			
8,000	.00045	.00006			
9,000	.00062	.00007			
10,000	.00060	.00008	0.	0.	
11,000	.00067	.00007			
12,000	.00074	.00007			
13,000	.00083	.00009			
14,000	.00091	.00008			
15,000	.00102	.00011	.00009	.00009	
16,000	.00119	.00017			
17,000	.00142	.00023			
18,000	.00180	.00038			
19,000	.00230	.00100			
20,000	.00410	.00130			Tensile strength.
20,000	.00490	.00080	.00420	.00411	
43,800					

*General summary.*

Tensile strength per square inch of original section .....	pounds..	43,800
Elastic limit per square inch of original section .....	do...	14,000
Elongation per inch after rupture .....	inch..	.312
Elongation per inch under strain at elastic limit .....	do...	.00091
Reduction in diameter at point of rupture .....	do...	.199
Reduction in area after rupture, per cent of original section .....		32.1
Character of broken surface .....		uniform, lavender yellow
Elongation of inch sections .....	" 28, " 29, " 30, " 30 " 31, " 32, " 32, " 31, 31", " 38"	



GUN No. 2, MUZZLE END.

Diameter, 1".009.

Sectional area, .800 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.			Initial load.
2,000	.00006	.00005			
3,000	.00011	.00006			
4,000	.00018	.00007			
5,000	.00024	.00006	0.	0.	
6,000	.00031	.00007			
7,000	.00038	.00007			
8,000	.00044	.00006			
9,000	.00051	.00007			
10,000	.00058	.00007	0.	0.	
11,000	.00064	.00006			
12,000	.00072	.00008			
13,000	.00080	.00008			
14,000	.00090	.00010			
15,000	.00100	.00010	.00004	.00004	
16,000	.00115	.00015			
17,000	.00135	.00020			
18,000	.00176	.00041			
19,000	.00250	.00074			
20,000	.00390	.00140	.00273	.00269	
21,000	.00650	.00280			
22,000	.01000	.00850			
47,000					Tensile strength.

General summary.

Tensile strength per square inch of original section .....	pounds..	47,000
Elastic limit per square inch of original section .....	do....	14,000
Elongation per inch after rupture .....	inch..	.407
Elongation per inch under strain at elastic limit .....	do....	.00090
Reduction in diameter at point of rupture .....	do....	.179
Reduction in area after rupture, per cent of original section .....		32.4
Character of broken surface .....		uniform, dark yellow
Elongation of inch sections .....	" .41, ".41, ".42, ".40, ".40, ".40, ".40, ".41, ".38, ".44"	

GUN NO. 3, BREECH END.

Diameter, 1".129.

Sectional area, 1 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.			Initial load.	
2,000	.00008	.00008				
3,000	.00015	.00007				
4,000	.00022	.00007				
5,000	.00029	.00007	0.	0.		
6,000	.00034	.00005				
7,000	.00041	.00007				
8,000	.00049	.00008				
9,000	.00054	.00005				
10,000	.00060	.00006	.00001-			
11,000	.00067	.00007				
12,000	.00076	.00009	.00003	.00002+		Elastic limit.
13,000	.00084	.00008				
14,000	.00100	.00016				
15,000	.00118	.00018	.00030	.00027		
16,000	.00160	.00042				
17,000	.00220	.00060				
18,000	.00380	.00160				
19,000	.00700	.00320				
20,000	.01200	.00500	.01070	.01040	Tensile strength.	
43,070						

General summary.

Tensile strength per square inch of original section .....	pounds..	43,070
Elastic limit per square inch of original section .....	do..	13,000
Elongation per inch after rupture .....	inch..	.428
Elongation per inch under strain at elastic limit .....	do..	.00084
Reduction in diameter at point of rupture .....	do..	.209
Reduction in area after rupture, per cent of original section .....		33.5
Character of broken surface .....	uniform, reddish yellow	
Elongation of inch sections .....	" 41, " 43, " 42, " 43, " 51*, " 45, " 42, " 43, " 40, " 38	

GUN No. 3, MUZZLE END.

Diameter, 1".009.

Sectional area, .800 square inch.

Gauged length, 10".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.			Initial load.
2,000	.00008	.00008			
3,000	.00014	.00006			
4,000	.00021	.00007			
5,000	.00029	.00008	0.	0.	
6,000	.00036	.00007			
7,000	.00042	.00006			
8,000	.00050	.00008			
9,000	.00057	.00007			
10,000	.00065	.00008	.00001	.00001	
11,000	.00071	.00006			Elastic limit.
12,000	.00081	.00010	.00004	.00003	
13,000	.00092	.00011			
14,000	.00108	.00016			
15,000	.00142	.00034	.00043	.00041	
16,000	.00200	.00058			
17,000	.00300	.00100			
18,000	.00500	.00200			
19,000	.00900	.00300			
20,000	.01400	.00600			
20,000	.01600	.00200			
20,000	.01700	.00100	.01645	.01597	Tensile strength.
35,130					

General summary.

Tensile strength per square inch of original section.....	pounds..	35,130
Elastic limit per square inch of original section.....	do.....	12,000
Elongation per inch after rupture.....	inch.....	.213
Elongation per inch under strain at elastic limit.....	do.....	.00081
Reduction in diameter at point of rupture.....	do.....	.159
Reduction in area after rupture, per cent of original section.....		29.1
Character of broken surface.....		reddish yellow, spongy spots
Elongation of inch sections.....	" .20, ".18, ".21, ".19, ".19, ".20, ".20, ".31", ".23, ".22	

## SPECIMENS OF RECAST METAL.

## GUN No. 1, MUZZLE END.

RECAST.

Diameter, ".541.

Sectional area, .23 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
Pounds.	Inch.	Inch.	
1,000	0.	.....	Initial load.
10,430	.....	.....	Elastic limit.
18,260	.01	.....	
20,420	.02	.....	
21,800	.03	.....	
22,170	.04	.....	
23,040	.05	.....	
23,910	.06	.....	
24,780	.07	.....	
25,220	.09	.....	
32,390	.....	.....	Tensile strength.

*General summary.*

Tensile strength per square inch of original section .....	pounds..	32,390
Elastic limit per square inch of original section .....	do .....	10,430
Elongation per inch after rupture .....	inch..	.103
Reduction in diameter at point of rupture .....	do .....	.041
Reduction in area after rupture, per cent of original section .....		14.8
Character of broken surface .....	lavender yellow, crystalline structure	
Elongation of inch sections .....	" .10, ".11*, ".10	

## GUN No. 2, MUZZLE END.

RECAST.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
Pounds.	Inch.	Inch.	
1,000	0.	.....	Initial load.
16,800	.....	.....	Elastic limit.
19,600	.01	.....	
22,000	.02	.....	
22,800	.03	.....	
23,600	.04	.....	
25,200	.05	.....	
30,400	.06	.....	
31,600	.07	.....	
43,320	.....	.....	Tensile strength.

*General summary.*

Tensile strength per square inch of original section .....	pounds..	43,320
Elastic limit per square inch of original section .....	do .....	16,800
Elongation per inch after rupture .....	inch..	.233
Reduction in diameter at point of rupture .....	do .....	.064
Reduction in area after rupture, per cent of original section .....		21.6
Character of broken surface .....	light lavender, crystalline structure	
Elongation of inch sections .....	".25*, ".23, ".22	

## SPECIMENS OF RECAST METAL WITH TIN, OR TIN AND ZINC, ADDITIONS.

GUN No. 2, MUZZLE END.

RECAST, 2 PER CENT TIN ADDED.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.		Initial load.
14,000			Elastic limit.
21,600	.01		
26,000	.02		
27,200	.03		
28,800	.04		
30,000	.05		
31,200	.06		
32,000	.07		
32,800	.08		
36,880			Tensile strength.

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 36,880  
 Elastic limit per square inch of original section ..... do... 14,000  
 Elongation per inch after rupture..... inch... .057  
 Reduction in diameter at point of rupture..... do... .084  
 Reduction in area after rupture, per cent of original section..... 11.6  
 Character of broken surface ..... yellowish gray, crystalline structure  
 Elongation of inch sections ..... ".04, ".06, ".07"

BRONZE FROM OLD 12-POUNDER GUNS.

GUN NO. 2, BREECH AND MUZZLE ENDS.

RECAST,  $\frac{1}{2}$  PER CENT TIN AND 1 PER CENT ZINC ADDED.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	.....	Initial load.
12,000	.....	.....	Elastic limit.
16,000	.01	.....	
18,400	.02	.....	
19,200	.03	.....	
19,600	.04	.....	
20,800	.05	.....	
21,600	.06	.....	
22,000	.07	.....	
22,400	.08	.....	
22,400	.09	.....	
22,800	.10	.....	
33,600	.....	.....	Tensile strength.

General summary.

Tensile strength per square inch of original section ..... pounds.. 33,600  
 Elastic limit per square inch of original section ..... do... 12,000  
 Elongation per inch after rupture ..... inch. .193  
 Reduction in diameter at point of rupture..... do... .074  
 Reduction in area after rupture, per cent of original section ..... 24.4  
 Character of broken surface ..... uniform, golden yellow with small lavender spots  
 Elongation of inch sections..... ".18, ".20\*, "14"

GUN NO. 3, BREECH AND MUZZLE ENDS.

RECAST,  $\frac{1}{2}$  PER CENT TIN AND 1 PER CENT ZINC ADDED.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 4".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	.....	Initial load.
9,200	.....	.....	Elastic limit.
18,800	.01	.....	
22,000	.02	.....	
23,600	.03	.....	
24,000	.04	.....	
24,800	.05	.....	
25,600	.06	.....	
26,400	.07	.....	
26,800	.08	.....	
39,600	.....	.....	Tensile strength.

General summary.

Tensile strength per square inch of original section ..... pounds.. 39,600  
 Elastic limit per square inch of original section ..... do... 9,200  
 Elongation per inch after rupture ..... inch. .168  
 Reduction in diameter at point of rupture..... do... .044  
 Reduction in area after rupture, per cent of original section..... 15.2  
 Character of broken surface ..... uniform, lavender, crystalline  
 Elongation of inch sections..... ".18, ".18\*, ".15, ".16

TABULATION, BRONZE FROM OLD 12-POUNDER GUNS, AND RECAST METAL.

ORIGINAL TESTS, SPECIMENS FROM THE GUNS.

No. of gun.	Position in gun.	Direction of specimens.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction of area.	Appearance of fracture.	Specific gravity.	Hardness.	Guns branded.
			<i>Pounds.</i>	<i>Pounds.</i>	<i>Per cent.</i>	<i>Per cent.</i>				
1	Breech	Longitudinal.	14,000	39,800	22.5	19.9	Dull lavender yellow	8.818	4.51	H. N. Hooper & Co., No. 845.
1	Muzzle	do	14,000	41,440	33.7	29.1	Golden yellow	8.724	4.22	Do.
2	Breech	do	14,000	48,800	31.2	32.1	Lavender yellow	8.568	4.69	C. A. & Co., No. 166.
2	Muzzle	do	14,000	47,000	40.7	32.4	Dark yellow	8.731	5.08	Do.
3	Breech	do	13,000	48,070	42.8	33.5	Reddish yellow	8.566	4.42	Revere Copper Co., No. 440.
3	Muzzle	do	12,000	35,130	21.3	29.1	do	8.779	3.33	Do.

RECAST METAL, SPECIMENS TAKEN FROM INGOTS CAST IN IRON MOLDS.

1	Muzzle		10,480	32,390	10.3	14.8	Lavender yellow			
2	do		16,800	43,320	23.3	21.6	Light lavender			

RECAST METAL, SPECIMENS TAKEN FROM INGOTS CAST IN IRON MOLDS, WITH TIN AND ZINC ADDITIONS.

2	Muzzle, with 2 per cent tin.		14,000	36,860	5.7	11.6	Yellowish gray			
2	B. & M. with 4 per cent tin and 1 per cent zinc.		12,000	33,600	19.3	24.4	Golden yellow and lavender			
3	do		9,200	39,600	16.8	15.2	Lavender			

EXTRUDED BRASS, FROM ANGLE BAR.

Specimens 10 1/4" long.

No. of test.	Dimensions.		Sectional area.	Elastic limit.		Ultimate strength.		Elongation in 8 inches.		Area of fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
	Width.	Thickness.		Total.	Per square inch.	Total.	Per square inch.	Inch.	Per cent.				
10, 528	Inches. 1.842 1.841	Inch. .182 .180	Sq. inch. .344 .241	Pounds. 8,700 8,300	Pounds. 33,660 84,440	Pounds. 18,300 14,700	Pounds. 75,000 61,000	Inch. .97 .11	Per cent. 12.5 3.7	Sq. inch. .213 .214	Per cent. 12.7 11.2	Golden yellow Golden yellow yellow spots. Broke in jaw.	" 12, " 18, " 12*, " .04, " .04, " .08.

CHEMICAL ANALYSIS.

Copper.....	54.06
Zinc.....	45.77




---

---

**COPPER CYLINDERS FOR PRESSURE GAUGES.**

---

---





TARAGE TABLE FOR PRESSURE CYLINDERS, ETC.—Continued.

Actual loads applied.	Total compressions.										Mean correct sets	
	1.	2.	3.	4.	5.	6.	7.	8.	9.	10.		Mean.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.
7, 200	2394	2400	2370	2378	2358	2296	2241	2263	2337	2390	2357	236
7, 300	2415	2425	2397	2400	2399	2318	2267	2305	2385	2354	2364	22
7, 400	2438	2454	2420	2426	2416	2345	2296	2409	2413	2394	2410	22
7, 500	2462	2480	2449	2450	2440	2374	2326	2443	2440	2414	2437	24
7, 600	2489	2508	2476	2472	2469	2398	2352	2464	2446	2445	2464	24
7, 700	2516	2536	2502	2502	2492	2425	2474	2457	2491	2473	2469	24
7, 800	2541	2560	2532	2531	2525	2451	2477	2505	2511	2490	2514	24
7, 900	2567	2587	2552	2550	2542	2477	2503	2536	2533	2520	2538	25
8, 000	2590	2595	2577	2575	2561	2503	2533	2569	2561	2550	2565	25
8, 100	2611	2619	2596	2591	2584	2526	2574	2595	2585	2570	2585	25
8, 200	2638	2649	2619	2621	2610	2552	2596	2609	2606	2590	2606	25
8, 300	2654	2675	2642	2644	2630	2574	2623	2631	2620	2616	2632	26
8, 400	2675	2696	2665	2665	2650	2597	2653	2664	2653	2644	2655	26
8, 500	2697	2716	2686	2689	2675	2620	2689	2696	2683	2665	2678	26
8, 600	2719	2734	2709	2710	2700	2641	2687	2695	2708	2689	2699	26
8, 700	2740	2750	2725	2725	2720	2660	2710	2715	2722	2714	2719	26
8, 800	2760	2770	2752	2744	2740	2683	2729	2737	2744	2734	2739	26
8, 900	2777	2792	2770	2765	2755	2708	2749	2756	2764	2761	2760	27
8, 900	2796	2813	2793	2782	2777	2729	2774	2782	2782	2775	2780	27
9, 100	2817	2831	2811	2809	2800	2750	2790	2800	2804	2795	2801	27
9, 200	2834	2851	2832	2828	2818	2768	2810	2823	2822	2813	2820	27
9, 300	2852	2871	2849	2844	2838	2787	2823	2847	2840	2830	2838	28
9, 400	2869	2890	2870	2864	2855	2807	2846	2861	2863	2851	2858	28
9, 500	2887	2910	2890	2877	2875	2825	2867	2875	2881	2870	2876	28
9, 600	2908	2926	2906	2900	2897	2848	2885	2900	2897	2888	2898	28
9, 700	2924	2941	2921	2919	2918	2868	2902	2906	2919	2908	2912	28
9, 800	2940	2957	2927	2934	2930	2885	2919	2926	2931	2929	2929	28
9, 900	2956	2970	2958	2946	2948	2902	2944	2945	2947	2944	2945	28
10, 000	2970	2989	2974	2976	2965	2918	2952	2960	2960	2960	2962	29
10, 100	2996	3005	2990	2985	2976	2934	2970	2972	2975	2976	2977	29
10, 200	3001	3019	3002	2998	2994	2947	2987	2985	2988	2990	2992	29
10, 300	3017	3024	3020	3018	3019	2962	3003	3005	3015	3010	3008	29
10, 400	3030	3046	3037	3030	3025	2979	3019	3021	3030	3023	3024	30
10, 500	3046	3060	3052	3049	3043	2995	3035	3039	3044	3039	3040	30
10, 600	3060	3073	3063	3061	3056	3015	3051	3055	3059	3056	3056	30
10, 700	3074	3093	3082	3077	3070	3030	3068	3069	3070	3074	3071	30
10, 800	3088	3105	3100	3090	3084	3047	3083	3080	3085	3085	3085	30
10, 900	3108	3128	3115	3102	3096	3065	3098	3096	3100	3100	3099	30
11, 000	3117	3136	3125	3124	3112	3070	3111	3110	3114	3119	3114	30
11, 100	3130	3148	3138	3132	3126	3090	3126	3120	3127	3130	3126	31
11, 200	3141	3160	3154	3146	3140	3095	3138	3135	3144	3141	3139	31
11, 300	3155	3174	3165	3156	3153	3114	3149	3149	3158	3160	3153	31
11, 400	3170	3189	3179	3170	3166	3128	3169	3161	3168	3174	3167	31
11, 500	3184	3200	3191	3182	3180	3140	3180	3175	3180	3184	3180	31
11, 600	3198	3215	3205	3198	3192	3155	3190	3188	3193	3194	3198	31
11, 700	3208	3229	3218	3215	3204	3172	3200	3200	3206	3209	3206	31
11, 800	3222	3240	3233	3225	3218	3186	3215	3215	3219	3221	3219	31
11, 900	3235	3250	3244	3235	3228	3195	3228	3228	3232	3232	3231	30
12, 000	3250	3259	3253	3244	3244	3208	3240	3239	3244	3249	3243	32
12, 100	3254	3270	3265	3255	3255	3220	3250	3250	3258	3257	3253	32
12, 200	3265	3283	3277	3272	3267	3232	3263	3260	3267	3268	3265	32
12, 300	3276	3296	3291	3284	3278	3244	3275	3275	3278	3281	3277	32
12, 400	3289	3305	3303	3294	3291	3254	3287	3284	3290	3294	3289	32
12, 500	3300	3316	3312	3304	3300	3265	3296	3294	3300	3305	3299	32
12, 600	3310	3327	3320	3315	3311	3275	3307	3305	3313	3316	3310	32
12, 700	3330	3335	3335	3327	3320	3288	3318	3319	3324	3328	3321	32
12, 800	3340	3346	3345	3336	3330	3297	3330	3329	3335	3336	3331	32
12, 900	3341	3358	3354	3353	3341	3306	3340	3339	3346	3347	3343	32
13, 000	3351	3370	3366	3363	3352	3320	3353	3345	3356	3359	3354	33
13, 100	3361	3380	3375	3373	3363	3330	3360	3355	3370	3368	3364	33
13, 200	3370	3390	3385	3380	3373	3339	3369	3369	3390	3375	3373	33
13, 300	3380	3398	3394	3389	3381	3350	3378	3379	3390	3383	3382	33
13, 400	3389	3408	3403	3397	3392	3359	3389	3388	3396	3391	3391	33
13, 500	3398	3418	3412	3406	3401	3369	3398	3396	3405	3402	3401	33
13, 600	3409	3428	3422	3416	3412	3380	3408	3406	3414	3414	3411	33
13, 700	3418	3436	3431	3424	3421	3390	3420	3414	3423	3424	3420	33
13, 800	3425	3445	3440	3431	3428	3401	3430	3424	3435	3434	3429	33
13, 900	3435	3454	3449	3442	3440	3405	3439	3434	3445	3444	3439	33
14, 000	3444	3465	3458	3454	3446	3417	3445	3441	3456	3452	3448	33
14, 100	3450	3472	3469	3460	3455	3427	3454	3451	3466	3461	3457	33
14, 200	3458	3479	3473	3470	3465	3436	3463	3458	3472	3469	3465	33
14, 300	3467	3485	3480	3478	3475	3444	3475	3466	3483	3477	3474	33
14, 400	3476	3493	3495	3485	3483	3450	3484	3475	3490	3488	3482	33
14, 500	3483	3502	3491	3490	3480	3460	3492	3485	3498	3498	3490	33
14, 600	3493	3512	3510	3500	3500	3470	3505	3494	3505	3510	3500	33
14, 700	3498	3523	3520	3512	3510	3475	3514	3502	3515	3516	3509	33
14, 800	3508	3530	3527	3521	3518	3484	3522	3510	3523	3524	3517	33
14, 900	3517	3537	3535	3527	3525	3490	3528	3520	3529	3529	3524	33
15, 000	3529	3545	3544	3537	3534	3498	3536	3533	3537	3540	3533	35


---

---

**HELICAL SPRINGS.**

---

---



HELICAL SPRINGS FOR GUN CARRIAGES.

Compression tests of buffer springs for 75-millimeter R. F. mountain gun carriage.

DESCRIPTION OF ONE SPRING.

Free height .....inches.. 25.80  
 Number of coils..... 45  
 Pitch .....inch.. .596  
 Exterior diameter.....inches.. 2.05  
 Interior diameter.....do... 1.14  
 Dimensions of ribbon ..... " .106 " .140 ← Interior.

	Height.	Load sustained.	Remarks.
<b>First spring:</b>	<i>Inches.</i>	<i>Pounds.</i>	
First test .....	19.91	120	
	7.85	400	Spring jarred.
	6.58	400	
	9.92	800	Spring jarred.
	9.95	800	
	19.85	120	
	19.88	120	Spring jarred.
	25.73	0	
Second test.....	19.20	120	Testing attachment greased.
	15.12	200	Spring jarred continuously.
	9.94	800	
	7.00	380	
	9.90	800	
	15.10	200	
	19.82	120	
	25.73	0	
<b>Second spring:</b>			
First test .....	25.80	0	Spring jarred continuously.
	19.71	120	
	16.02	200	
	10.71	800	
	7.00	380	
	10.00	800	
	14.90	200	
	19.06	120	
	25.70	0	
Second test.....	19.84	120	
	15.49	200	
	10.42	800	
	7.00	380	
	9.89	800	
	14.85	200	
	18.94	120	
	25.70	0	
<b>Third spring, extra spring furnished with carriage. Previously tested.</b>	24.80	0	Spring jarred continuously.
	20.08	120	
	16.95	200	
	12.88	800	
	8.97	400	
	7.00	474	
	8.49	400	
	12.80	800	
	16.20	200	
	19.80	120	
	24.66	0	

DIMENSIONS OF THIRD SPRING, TAKEN AFTER TESTING.

Free height .....inches.. 24.66  
 Number of coils..... 45  
 Pitch .....inch.. .560  
 Exterior diameter.....inches.. 2.00  
 Interior diameter.....do... 1.14  
 Dimensions of ribbon ..... " .115 " .150 ← Interior.

Compression test of a helical spring from a 75-millimeter R. mountain gun carriage, from Frankford Arsenal.

DESCRIPTION.

Free height ..... inches.. 24  
 Number of coils ..... 43  
 Pitch ..... inch  
 Exterior diameter ..... inches.. 2  
 Interior diameter ..... do. .... 1  
 Dimensions of ribbon ..... " .109 " .145 ← Inter


Height.	Load sustained.	Remarks.
<i>Inches.</i>	<i>Pounds.</i>	
24.93	0	Testing attachment greased.
19.06	120	Spring and testing attachment jarred continuously to reduce frictional resistance.
15.77	200	
11.40	300	
7.20	400	
7.00	416	
11.00	300	
15.17	200	
18.98	120	
24.75	0	
24.79	0	After resting 10 minutes.
Spring loaded 100 times, closed down to a height of 7 inches and released to zero each time.		
24.50	0	
24.50	0	After resting 10 minutes.
19.06	120	Under test the spring deflected laterally and bore against the rods of the testing attachment. The frictional resistance was largely reduced by jarring.
15.70	200	
11.08	300	
7.38	400	
7.00	414	
10.75	300	
15.10	200	
18.80	120	
24.50	0	
18.90	120	
15.64	200	
11.15	300	
7.03	400	
7.00	408	
11.57	300	
15.66	200	
19.40	120	
24.48	0	
24.51	0	After resting 16 hours.



Compression tests of helical springs furnished by The Wm. D. Gibson Company.

Buffer springs for 75-millimeter R. F. mountain guni carriages.

DESCRIPTION OF FIRST SPRING.

Free height .....inches.. 32.60  
 Number of coils..... 58.75  
 Pitch .....inch.. .628  
 Exterior diameter.....inches.. 2.18  
 Interior diameter.....do.. 1.10  
  
 Dimensions of ribbon..... ".080 " .110

	Height.	Load sustained.	Remarks.
First spring.....	<i>Inches.</i>	<i>Pounds.</i>	Closed down.
	32.60	0	
	22.15	99	
	6.48	252	
	21.20	100	
Second spring.....	32.38	0	54½ coils. Closed down.
	32.48	0	
	22.15	100	
	6.40	254	
	21.05	100	
	31.99	0	

HELICAL SPRINGS, DOUBLE COIL, FOR 5-INCH R. F. GUN.

Six springs tested.

DESCRIPTION OF ONE SPRING.

Outside coil, left-hand spring:  
 Exterior diameter.....inches..  
 Diameter of bar.....do..  
 Height of spring unloaded.....do..  
 Distance between coils.....do..  
 Weight..... 21 pounds 5 oz

Inside coil, right-hand spring:  
 Exterior diameter.....inches..  
 Diameter of bar.....do..  
 Height of spring unloaded.....do..  
 Distance between coils.....do..  
 Weight..... 11 pounds 1.5 oz

	Height.	Load sustained.	Remarks.
First spring:	<i>Inches.</i>	<i>Pounds.</i>	
Outside coil .....	15.62	1,650	Closed down.
	15.50	1,740	
	10.78	3,400	
	15.50	1,470	
	14.70	1,650	
Inside coil.....	15.50	800	Sprung out of line so that it could not be closed down.
Outer and inner coils assembled and tested together.			
	15.50	2,360	Closed down.
	11.09	4,400	
	15.50	2,060	
	14.57	2,450	
In the following tests the outer and inner coils were assembled and tested together.			
Second spring .....	15.50	2,450	Closed down.
	11.09	4,600	
	14.95	2,450	
	15.50	2,180	
Third spring .....	15.50	2,430	Closed down.
	10.89	4,550	
	14.75	2,450	
	15.50	2,150	
Fourth spring .....	15.50	2,340	Closed down.
	10.94	4,600	
	14.85	2,450	
	15.50	2,070	
Fifth spring .....	15.87	2,450	Closed down.
	15.50	2,640	
	10.94	4,700	
	15.43	2,450	
	15.50	2,390	
Sixth spring.....	15.50	2,450	Closed down.
	15.50	2,600	
	10.61	4,600	
	14.55	2,450	
	15.50	2,110	

COUNTER RECOIL SPRINGS FOR 7-INCH MORTAR CARRIAGES.

COMPARISON OF OLD AND NEW STYLES OF SPRINGS.

NUMBER AND WEIGHT PER CARRIAGE.

Style.	Number for a carriage.	Weight.	
		Each.	Total.
Old .....	10	<i>Pounds.</i> 8.75	<i>Pounds.</i> 87.5
New .....	4	18	72

DIMENSIONS.

Style.	Size of wire.	Diameters.		Distance between coils.	Number of coils.	Height.
		Exterior.	Interior.			
Old .....	".55 by ".75	<i>Inches.</i> 4.48	<i>Inches.</i> 2.98	<i>Inch.</i> .66	7	<i>Inches.</i> 7.1±
New .....	".68 diam.	5.00	3.63	.84	13½	18.5±

SPECIFICATIONS, NEW SPRINGS.

Outside diameter of springs .....	inches..	5.	±0.06
Inside diameter of springs .....	do...	3.625	±0.06
Height when compressed solid, not over .....	do...	9.5	
Height when loaded with 1,200 pounds, not less than .....	do...	15.	
Height when free, about .....	do...	18.325	

Each spring to consist of a single coil of round bars and to be closed down solid, and to remain thus for sixty hours, at the end of which period it shall fulfill the requirements stated above. The temper to be drawn from the thin ends in each spring to obviate brittleness.

COMPRESSION TESTS OF THREE OLD SPRINGS FROM 7-INCH MORT. CARRIAGES.

DESCRIPTION OF FIRST SPRING.

7 right-hand coils of rectangular cross section.

Size of wire .....inch.. .55 by  
 Outside diameter of coil .....inches.. 4  
 Inside diameter of coil .....do... 2  
 Distance between coils .....inch..  
 Weight ..... 8 pounds 12 ounces

	Height.	Load.	Remarks.
First spring .....	<i>Inches.</i>	<i>Pounds.</i>	
	6.98	0	
	5.92	1,200	
	5.72	1,420	
	4.01	3,700	Closed down.
	5.72	1,280	
	5.82	1,200	
	6.96	0	
	5.90	1,200	
	5.72	1,380	
	4.01	3,500	Closed down.
	5.72	1,270	
	5.79	1,200	
	6.96	0	
Second spring .....	7.12	0	
	5.98	1,200	
	5.72	1,480	
	4.03	3,600	Closed down.
	5.72	1,330	
	5.85	1,200	
	7.10	0	
	5.94	1,200	
	5.72	1,430	
	4.03	3,600	Closed down.
	5.72	1,320	
	5.84	1,200	
	7.09	0	
	Third spring .....	6.97	0
5.94		1,200	
5.72		1,460	
4.11		3,600	Closed down.
5.72		1,340	
5.88		1,200	
6.96		0	
5.92		1,200	
5.72		1,430	
4.11		3,500	Closed down.
5.72		1,320	
5.82		1,200	
6.96		0	

HELICAL SPRINGS, DOUBLE COIL, FOR 10-INCH MORTAR CARRIAGES.

From lot of 12 springs received January 25, 1902.

DESCRIPTION OF ONE SPRING.

Outside coil, 6 coils, left-hand spring:	
Exterior diameter .....	inches.. 9.10
Interior diameter .....	do... 5.60
Diameter of bar .....	do... 1.75
Height of spring unloaded .....	do... 14.51
Distance between coils .....	do... 1.00
Weight .....	86 pounds 8 ounces
Inside coil, 8 coils, right-hand spring:	
Exterior diameter .....	inches.. 5.56
Interior diameter .....	do... 3.06
Diameter of bar .....	do... 1.25
Height of spring unloaded .....	do... 13.41
Distance between coils .....	do... .51
Weight .....	34 pounds 8 ounces

	Height.	Load sustained.	Remarks.
First spring .....	<i>Inches.</i>	<i>Pounds.</i>	Closed down.
	12.25	17,300	
	12.22	18,000	
	9.75	46,000	
	9.70	48,200	
	9.75	45,200	
	11.90	18,000	
Second spring .....	12.25	13,700	Closed down.
	12.25	16,500	
	12.12	18,000	
	9.75	44,400	
	9.59	47,200	
	9.75	43,700	
Third spring .....	11.78	18,000	Closed down.
	12.25	13,000	
	12.25	16,700	
	12.13	18,000	
	9.75	45,400	
	9.67	48,400	
Fourth spring .....	9.75	44,700	Closed down.
	11.75	18,000	
	12.25	12,900	
	12.25	17,500	
	12.20	18,000	
	9.75	45,800	
Fifth spring .....	9.72	46,700	Closed down.
	9.75	45,400	
	11.82	18,000	
	12.25	13,200	
	12.25	18,000	
	9.75	47,800	
Loaded 100 times, compressing to 10 <sup>o</sup> .25 height and returning to 12 <sup>o</sup> .25 height each time, after which the results were as follows:			Closed down.
12.25	15,400		
12.04	18,000		
9.75	44,600		
9.68	48,700		
9.75	43,900		
Spring now closed down and so remained for a period of 20 hours, after which the results were as follows:			Closed down.
11.90	18,000		
12.25	14,500		
12.25	16,500		
12.15	18,000		
9.75	46,700		
9.67	48,400		
9.75	46,400		
11.90	18,000		
12.25	14,500		

SUPPLEMENTARY TESTS OF HELICAL SPRINGS, DOUBLE COIL, FOR 10-INCH MORTAR CARRIAGES.

From lot of 12 springs received January 25, 1902.

	Height.	Load sustained.	Remarks.
	<i>Inches.</i>	<i>Pounds.</i>	
First spring.....	12.25	17,200	
Free height before test:	12.18	18,000	
Outside coil...inches.. 14.34	9.75	46,300	
Inside coil.....do... 13.35	9.68	49,700	Closed down.
	9.75	45,900	
	11.87	18,000	
	12.25	14,000	
	9.75	46,200	
	12.25	15,400	
	9.75	46,200	
Free height after test:	9.67	49,800	Closed down.
Outside coil...inches.. 14.30	9.75	45,800	
Inside coil.....do... 13.35	12.25	13,700	
First spring (test repeated).....	12.25	16,700	
Free height before test:	12.12	18,000	
Outside coil...inches.. 14.30	9.75	46,100	
Inside coil.....do... 13.35	9.67	49,700	Closed down.
	9.75	45,600	
	11.84	18,000	
	12.25	13,700	
	9.75	46,000	
	12.25	14,100	
	9.75	46,100	
Free height after test:	9.67	49,700	Closed down.
Outside coil...inches.. 14.28	9.75	45,900	
Inside coil.....do... 13.35	12.25	13,600	
Third spring.....	12.25	17,100	
Free height before test:	12.18	18,000	
Outside coil...inches.. 14.13	9.75	46,200	
Inside coil.....do... 13.42	9.63	48,800	Closed down.
	9.75	44,500	
	11.78	18,000	
	12.25	12,900	
	9.75	45,400	
	12.25	13,000	
	9.75	44,900	
Free height after test:	9.63	49,800	Closed down.
Outside coil...inches.. 14.09	9.75	45,100	
Inside coil.....do... 13.35	12.25	12,500	
Third spring (test repeated).....	12.25	15,900	
Free height before test:	12.06	18,000	
Outside coil...inches.. 14.09	9.75	44,900	
Inside coil.....do... 13.35	9.63	48,800	Closed down.
	9.75	43,800	
	11.77	18,000	
	12.25	12,800	
	9.75	44,400	
	12.25	12,400	
	9.75	44,300	
Free height after test:	9.64	48,500	Closed down.
Outside coil...inches.. 14.05	9.75	43,600	
Inside coil.....do... 13.32	12.25	12,400	

SUPPLEMENTARY TESTS OF HELICAL SPRINGS, ETC.—Continued.

SPRING COMPRESSED FROM HEIGHT OF 12".25 TO 10".25 100 TIMES.

Third spring:

Free height before compressing 100 times—	
Outside coil .....	Inches.. 14.05
Inside coil .....	do... 13.32
First compression—	
Load at 12".25 .....	pounds.. 15,100
Load at 10".25 .....	do... 38,500
One hundredth compression—	
Load at 12".25 .....	do... 12,900
Load at 10".25 .....	do... 38,200
Free height after compressing 100 times—	
Outside coil .....	Inches.. 14.05
Inside coil .....	do... 13.31

AFTER BEING COMPRESSED FROM 12".25 TO 10".25 100 TIMES.

	Height.	Load sustained.	Remarks.
	<i>Inches.</i>	<i>Pounds.</i>	
Third spring .....	12.25	15,100	
	12.03	18,000	
	9.75	44,400	
	9.63	48,700	Closed down.
Free height after test:	9.75	48,700	
Outside coil ..inches.. 14.04	11.76	18,000	
Inside coil .....do... 13.31	12.25	12,500	
Fifth spring .....	12.25	17,000	
Free height before test:	12.17	18,000	
Outside coil ..inches.. 14.05	9.67	48,500	Closed down.
Inside coil .....do... 13.48	11.90	18,000	
	12.25	14,000	
	9.67	48,400	Closed down.
	11.88	18,000	
	12.25	13,700	
Free height:			
Outside coil ..inches.. 14.03	12.25	16,500	
Inside coil .....do... 13.44	12.14	18,000	
	9.67	48,700	Closed down.
	11.89	18,000	
	12.25	14,200	
	9.67	48,700	Closed down.
	11.87	18,000	
	12.25	13,800	
Free height:			
Outside coil ..inches.. 14.01	12.25	16,400	
Inside coil .....do... 13.43	11.50	25,600	
	12.25	16,100	
	11.00	31,400	
	12.25	15,400	
	10.50	37,200	
Free height after test:	12.25	15,100	
Outside coil ..inches.. 14.01	10.00	48,000	
Inside coil .....do... 13.43	12.25	14,300	

Additional tests were made on spring No. 5. After resting without load a period of 4 days the spring was returned to the testing machine. When again loaded it sustained 17,000 pounds at a height of 12".25, against 18,000 pounds at the commencement of the original test and 14,500 pounds at the same height at the close of the first test.

	Pounds.
In the present instance, after closing down, the load sustained on the return movement was.	14,000 (a)
After closed down a second time .....	13,700 (b)
Load released to zero, then again loaded .....	16,500
Closed down and returned .....	14,200 (a)
Closed down again and returned .....	13,800 (b)

The conditions of the tests were similar in instances (a) (a), and likewise in (b) (b), and it is seen that the loads sustained are practically alike in each of the two of the same group.

The spring was again completely unloaded and compressed successively increased amounts.

It is now shown that the load sustained by the spring at 12".25 height is as follows:

	Pounds.
First application of load.....	16,400
After compressing to 11".50 height .....	16,100
After compressing to 11".00 height .....	15,400
After compressing to 10".50 height .....	15,101
After compressing to 10".00 height .....	14,300

thus showing a gradual decrease in sustaining power, due to the manner of loading.



---


---

**CAST IRON SHELL, 12-INCH MORTAR.**


**COMPRESSIVE MOVEMENT OF BASE PLUG AND  
DIAMETRICAL EXPANSION OF SHELL.**

---

---



CAST-IRON SHELL, 12-INCH MORTAR.

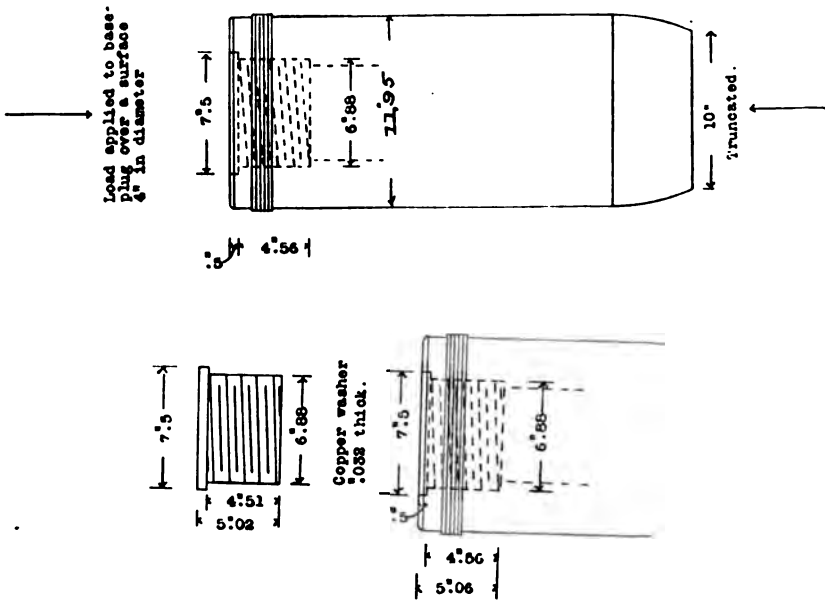

COMPRESSIVE MOVEMENT OF BASE PLUG.

READINGS TAKEN ON BREACH PLUG 2 1/2" FROM CIRCUMFERENCE OF SHELL

Applied loads.	Longitudinal compression.	Remarks.
<i>Pounds.</i>	<i>Inches.</i>	
5,000	0.	Initial load.
10,000	0.	
20,000	.0003	Movement took place in an inward direction, longitudinally.
40,000	.0013	
60,000	.0023	
100,000	.0040	
150,000	.0049	
200,000	.0055	
250,000	.0060	
300,000	.0064	
400,000	.0070	
500,000	.0076	
600,000	.0084	
700,000	.0091	
800,000	.0096	
5,000	.0033	

## COMPRESSIVE MOVEMENT OF BASE PLUG—Continued.

READINGS TAKEN ON BREECH PLUG 2" FROM CIRCUMFERENCE OF SHELL—Continued.

Applied loads.	Longitudinal compression.	Remarks.
<i>Pounds.</i> 800,000 5,000	<i>Inches.</i> .0090 .0084	
Shell removed from the testing machine and examined. Breech plug indented, that part of surface acted upon by loading fixture 4" diameter, ".04. The end surface of the plug was found concaved ".03 in addition to the ".04 indentation. A spanner was applied and a slight gain obtained on the screw thread of the plug. Shell returned to the testing machine, and observations on the same gauged length repeated as before.		
5,000	0.	Initial load.
800,000	.0070	
5,000	.0011	
800,000	.0070	
5,000	.0012	

READINGS TAKEN ON THE BASE OF THE SHELL 1½" FROM CIRCUMFERENCE.

5,000	0.	
800,000	.0012	
5,000	0.	
800,000	.0012	
5,000	0.	
800,000	.0012	
5,000	0.	

## DIAMETRICAL EXPANSION OF SHELL.

READINGS TAKEN ON DIAMETER AT THE REAR OF THE BAND, MIDWAY BASE AND BAND.

Applied loads.	Diametrical expansion.	Remarks.
<i>Pounds.</i> 5,000 800,000 5,000 800,000 5,000	<i>Inches.</i> 0. — .0006 0. — .0006 0.	Initial load.

ON DIAMETER ¼" IN FRONT OF BAND.

5,000	0.	Initial load.
800,000	.0087	
5,000	0.	
800,000	.0086+	
5,000	0.	

ON DIAMETER 5¼" IN FRONT OF BAND.

5,000	0.	Initial load.
800,000	.0019	
5,000	0.	
800,000	.0019	
5,000	0.	

ON DIAMETER 10¼" IN FRONT OF BAND.

5,000	0.	Initial load.
800,000	.0013	
5,000	0.	
800,000	.0014	
5,000	0.	

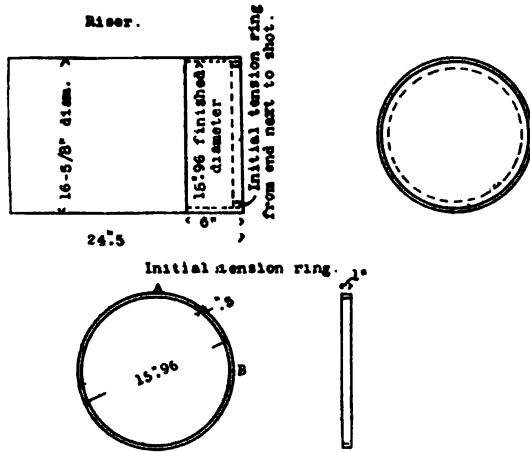
INITIAL STRAINS IN 16-INCH CAST-IRON SHOT.

Initial tension ring and tensile tests from riser of a 16-inch cast-iron solid shot.

Dimensions of riser:

Diameter .....	Inches.
Length .....	16 $\frac{1}{2}$
	24 $\frac{1}{2}$

Exterior of riser, at the end next to the shot, turned down to 15''<sup>96</sup> diameter for a length of 6 inches. An initial tension ring taken from the turned end of the riser, measured while the riser was intact, and again after the ring was detached.



Measured on diameters A and B:

Condition of ring.	Diameters.		
	A.	B.	Mean.
Riser intact .....	<i>Inches.</i> 15.9601	<i>Inches.</i> 15.9600	<i>Inches.</i> 15.96005
Ring detached .....	15.9588	15.9606	15.9597

Strains released and computed stress:

Condition of ring,	Strains released, diameters.			Corresponding stress.
	A.	B.	Mean.	
Detached .....	<i>Inch.</i> -.0013	<i>Inch.</i> +.0006	<i>Inch.</i> -.00085	<i>Lbs. per sq. in. tension.</i> 400

Assumed modulus of elasticity, 18,000,000 pounds per square inch.

The detached ring was subsequently cut apart radially, whereupon the ends opened  $.079$ , showing the relief of residual strains, tension at the exterior, compression at the interior, which did not find complete relief when the ring was detached from the body of the casting.

## TENSILE TESTS.

No. of test.	Direction of specimen.	Tensile strength per square inch.	Fracture.	Specific gravity.
		<i>Pounds.</i>		
6756	Longitudinal.....	22,190	Coarse granular, gray.....	7.164
6757	Tangential.....	28,400	Fine and coarse granular, gray.....	7.148
6758	Radial.....	24,820	.....do.....	

---


---

## HYDROSTATIC TESTS OF TWO GUN HOOPS.

---

*No. 17093 B3, A STREAKED HOOP.*


*No. 17959 B4, AN UNSTREAKED HOOP.*





## MATERIAL TESTED AND METHODS EMPLOYED.

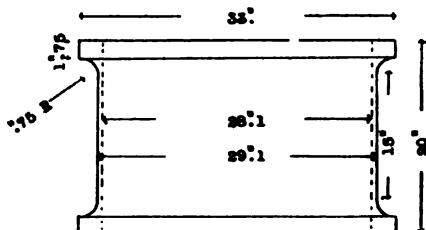Two hoops, one originally intended for a 10-inch A3 hoop, the other a 10-inch A2 hoop, of streaked and unstreaked metal, respectively, were tested to destruction by means of interior hydrostatic pressures. The hoops were finished for testing to the shape and dimensions here shown:



The walls at the central part of each hoop, for a length of 15 inches, were one-half inch thick. Flanges were left on the ends to reinforce the strength of the hoop over the hydraulic packings.

The testing was done with a fixture consisting of a body, flanged at the lower end, over which the hoop was placed, and surmounted by a cap bolted to the body. An annular space,  $.75$  wide on a side, existed between the interior surface of the hoop and the exterior surface of the body, which space contained the hydraulic packings. The end thrust of the packings was resisted by the flange at the bottom of the body in one direction and by the cap in the other. Communication was established between the annular space and the testing machine through hydraulic piping, and the straining of the hoop was effected by admitting oil or water under gradually increasing pressures.

A caliper arm carrying micrometer points was mounted opposite the middle diameter of the hoop under test, and observations taken on the expansions and permanent sets acquired by the application of advancing pressures and their release. At pressures 2,000 and 3,000 pounds per square inch below the elastic limits of the streaked and unstreaked hoops, respectively, the loads were applied and released 500 times with each hoop. Thereafter the pressures were gradually increased, passing the elastic limits of the material and approaching the limit of rupture.

There were interruptions during the final stages of the tests, once with the streaked hoop, several times with the unstreaked one, when it was necessary to machine the flanges or modify the testing fixture to compensate for the distortion of the test piece. The distortion finally became so great with the unstreaked hoop as to require the use of staves and a retaining band acting against the flanges to restrict further longitudinal contraction of the hoop, which otherwise might have gone beyond the compensating limits of the fixture. This occurred when the indications of the test were that a close approach to the ultimate strength of the material had been reached, a stress considerably in excess of the strength of the tensile specimens having been applied. Circumferential extension was not opposed by the presence of the staves excepting indirectly by the restriction of longitudinal contraction of the hoop as a whole.

The minimum values shown in the specimen tests of the physical qualities found in the specimens were as follows:

	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Contraction.
Streaked hoop .....	<i>Pounds.</i> 54,000	<i>Pounds.</i> 102,400	<i>Per cent.</i> 15.0	<i>Per cent.</i> 38.3
Unstreaked hoop.....	56,000	110,000	12.0	35.2

#### CHEMICAL ANALYSIS OF STREAKED HOOP.

Carbon.	Manganese.	Silicon.	Sulphur.	Phosphorus.
<i>Per cent.</i> .640	<i>Per cent.</i> .792	<i>Per cent.</i> .277	<i>Per cent.</i> .022	<i>Per cent.</i> .022

#### GENERAL RESULTS OF THE TESTS.

Each hoop endured a stress 2,000 and 3,000 pounds per square inch respectively, below the elastic limit, repeated 500 times, without sensible permanent set in diameter. The elastic limit of each hoop under hydrostatic test coincided with the minimum value found in the specimen tests of the metal.

In ultimate bursting strength the streaked hoop showed a deficiency over the specimen tests; the unstreaked hoop showed an excess in strength over the specimen tests. The numerical values obtained were as follows:

#### HYDROSTATIC TESTS.

	Hoop.	
	Streaked per square inch.	Unstreaked per square inch.
Elastic limit .....	<i>Pounds.</i> 54,000	<i>Pounds.</i> 56,000
Ultimate strength .....	91,051	125,889
Elongation (circumferential) .....	3.92	18.5

In circumferential elongation the relation of the hydrostatic to the specimen tests was similar to the results on ultimate strength. There was a deficiency of elongation displayed by the streaked hoop; an excess of elongation displayed by the unstreaked hoop with reference to the specimen tests of the metal.

From the original thickness, ".50, the walls of the streaked hoop drew down to ".483 at the fractured edge, and the unstreaked hoop drew down to ".436, the contraction in the thickness of the two hoops was therefore:

	Contraction at fractured edge.
Streaked hoop.....	Inch. .017
Unstreaked hoop.....	.064

The character of the fractured surface in each hoop was granular, radiating from the incipient point.

The line of fracture in the streaked hoop had its origin at the principal streak of the exterior surface, an interrupted line of alternate seamy and sound metal  $4\frac{1}{8}$  inches long by 0.15 inch deep in an oblique direction at its maximum. This and other streaks in the hoop gradually increased in prominence as the interior pressures advanced beyond the elastic limit of the metal.

The unstreaked hoop fractured along an element not previously characterized by any unusual local appearance of the metal.

COMPARISONS OF THE RESULTS AND CONCLUSIONS REACHED.

(1) The elastic limits of the hoops possessed the values indicated by the specimen tests.

(2) Each hoop successfully endured 500 repetitions of a load closely approaching, but within the elastic limit of the metal.

(3) The presence of streaks exerted a marked influence on the ultimate strength and elongation of the metal.

(4) The actual bursting strength of the unstreaked hoop was 34,838 pounds per square inch above that of the streaked one, or corrected for the difference in the specimen tests of the metal the above became 27,238 pounds per square inch. Under the corrected figures the strength of the streaked hoop is 77 per cent that of the unstreaked.

(5) Compared with their respective tensile specimens the following values appear: Streaked hoop, deficiency in strength, 11,349 pounds per square inch; unstreaked hoop, excess in strength, 15,889 pounds per square inch; the streaked hoop has 88.9 per cent the strength of the specimen test; the unstreaked hoop has 114.1 per cent the strength of the specimen test.

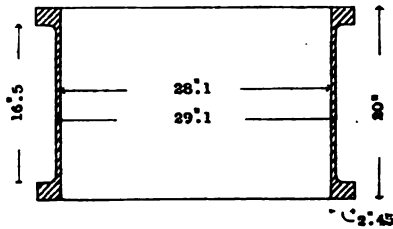
(6) The elongation of the streaked hoop was 26.1 per cent that of the specimen test; the elongation of the unstreaked hoop was 154.1 per cent that of the specimen test.

(7) The excess in strength and elongation of the unstreaked hoop over the specimen test is attributed to the reinforcing influence of the flanges of the hoop.

(8) The deficiency in strength and elongation of the streaked hoop over the specimen test is attributed to the presence of streaks in the metal.

## DETAILS O TESTS.

HYDROSTATIC TEST OF STREAKED HOOP 17093 B3. ORIGINALLY A 10" A3 HOOP.

Expansion of the hoop measured at the middle of its length on  $\epsilon$  diameter.

Interior pressure per square inch.	Fiber stress per square inch.	Expansion in diameter.	Remarks.
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
173	5,000	0.	Initial load.
346	10,000	.0051	
518	15,000	.0098	
691	20,000	.0150	
864	25,000	.0195	
1,037	30,000	.0234	
1,209	35,000	.0283	
1,382	40,000	.0333	
173	5,000	0.	
Hoop rested 12 days.		Pressures maintained ranging from 200 to 600 pounds per square inch.	
173	5,000	0.	
1,382	40,000	.0842	
173	5,000	.0002	
1,382	40,000	.0837	
1,555	45,000	.0891	
1,728	50,000	.0455	
173	5,000	.0008	
173	5,000	.0040	Micrometer reading after resting 1 hour.
1,797	52,000	.....	
173	5,000	.0040	
1,797	52,000	.....	Applied 25 times.
173	5,000	.0040	
1,797	52,000	.....	Applied 25 times.
173	5,000	.0038	
1,797	52,000	.....	Applied 50 times.
173	5,000	.0020	
1,797	52,000	.....	Applied 100 times.
173	5,000	.0040	
1,797	52,000	.....	Applied 33 times.
173	5,000	.0040	
173	5,000	.0025	Micrometer reading after resting over night.
1,797	52,000	.....	Applied 67 times.
173	5,000	.0026	
1,797	52,000	.....	Applied 200 times.
173	5,000	.0040	
173	5,000	.0051	Micrometer reading after resting 1 hour.
1,866	54,000	.....	Elastic limit.
173	5,000	.0061	
1,935	56,000	.....	
173	5,000	.0569	
2,004	58,000	.....	
173	5,000	.1784	
2,073	60,000	.....	
173	5,000	.2220	Enlargement of hoop most marked along zones 6" and 12" from one end. N. & S. diam. .016 larger than E. & W. diameter.
2,142	62,000	.....	
173	5,000	.2650	Seams opened perceptibly in 3 places.
2,211	64,000	.....	
173	5,000	.3066	
2,280	66,000	.....	
173	5,000	.3528	
173	5,000	.3495	Micrometer reading after resting over night. Photographed principal seam.


DETAILS OF TESTS—Continued.

Interior pressure per square inch.	Fiber stress per square inch.	Expansion in diameter.	Remarks.
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
2,349	68,000	.....	
173	5,000	.8907	
2,419	70,000	.....	
173	5,000	.4373	
2,488	72,000	.....	
173	5,000	.4910	
2,567	74,000	.....	
173	5,000	.5461	
2,626	76,000	.....	
173	5,000	.5811	
2,695	78,000	.....	
173	5,000	.6500	
2,764	80,000	.....	
173	5,000	.7222	
3,244	93,883	.....	Pressure momentarily reached.

Exterior diameter at middle of length, 30".27. Maximum and minimum diameters, ".077 difference.


Packing at lower end blew out a distance of 12" on the circumference.

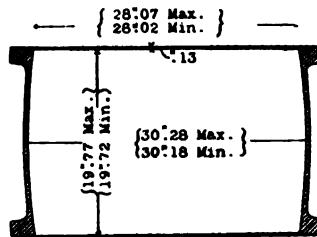Hoop removed from the testing attachment and measured as follows:




Diameters at middle of length, 30".28, maximum; 30".18, minimum. Original interior diameter, called, 29.101; hence elongation of metal is 3.88 per cent.


Streaks plainly visible on the exterior cylindrical surface measured: Principal streak along which rupture subsequently occurred.




Detached streaks, scattered over surface.



Streak second in extent.



The streaks which were scattered over the interior surface measured:



Streaks on the inside were not abreast those visible on the outside of the hoop. The several streaks acquired greater prominence after pressures were applied which strained the metal beyond the elastic limit. Prior to the application of such pressures the general surface of the hoop was smooth, and apparently so remained up to the time of reaching the elastic limit. Under higher interior pressures a roughness appeared at the streaks, the metal on one side rising slightly above the general surface, opening fissures which dipped obliquely, some in one direction and some in the opposite way. After the fracture of the hoop it was found that the metal at the principal streak was affected for a distance of about ".15, penetrating to a depth of ".04±.

In the principal streak and also in three other cases there were sections of continuous metal between ends of open cracks. All of the streaks here referred to were of the type in which continuity of the metal is wanting; that is, they were seams existing in the steel. In addition to those measured, there were others of a less pronounced order which were not sensibly affected by stresses above the elastic limit of the steel. There were faint nebulous patches occasionally found—clusters of minute, irregular-shaped cavities.

#### TEST OF HOOP RESUMED.

The flanges were chamfered, now measuring 1".42 in length at outer edge. Connections made with high-pressure auxiliary cylinder. Diameter of piston, 3".37; sectional area, 8".92.

Hoop ruptured under load of 28,100 pounds on piston of auxiliary cylinder, which gives 3,150 pounds per square inch interior pressure. Referred to the original dimensions of the hoop, the fiber stress corresponding to the interior pressure is 91,051 pounds per square inch. This stress is regarded as the more reliable value of the strength of the metal than the load previously mentioned as momentarily reached. A longitudinal line of rupture developed, passing through the principal streak of the exterior surface of the hoop, being the same line of streaked metal most prominent throughout the test, and shown by the photograph taken after the application of 66,000 pounds per square inch fiber stress.

The line of fracture of the hoop began about midway the length of the streaked section, or 5".6 from one end of the hoop, as shown by the center of radiation of the fractured surface, which was granular throughout. After removing the hoop from the testing attachment the width of opening of the fractured ends ranged from 1".02 to 1".08 at the streaked section, ".96 at the nearer end under the flange and ".88 at the farther end under the flange. Along the streaked section a distance of  $4\frac{1}{2}$ " the fractured surface took an irregular course; the balance of the fracture on either side followed more direct courses to the ends of the hoop. In the streaked section there was a flaky, lamellar appearance, the metal separating along oblique planes with reference to the exterior cylindrical surface. The overlapping metal reached a maximum width of ".15 and depth of about ".04. The thickness of the walls adjacent to the fractured surface was ".482 at the middle of the length of the hoop; at the place where rupture began the thickness was ".490, while at the corresponding distance from the opposite end the thickness was ".486. The circumference at the middle of the length and exterior of the hoop measured, after fracture,

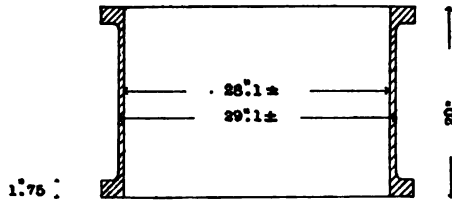
95", an extension over the original circumference of  $3''.58=3.92$  per cent. At the middle of the length of the principal streak the circumference measured 1 inch less, or  $94''$  circumference, an extension over the original of  $2''.58=2.82$  per cent.

Near the fillets at the flanges the circumferences were  $92''.31$  and  $92''.37$ . Thickness of walls:

	At fractured edge.	1/4 inch from edge.
	Inch.	Inch.
	.490	.488
	.482	.487
	.496	.499

The versed sines A of chord at the different quarters were  $''.$ 80,  $''.$ 61,  $''.$ 61,  $''.$ 62, the first mentioned being taken next the line of fracture.

HYDROSTATIC TEST OF UNSTREAKED HOOP 17869 B4. ORIGINALLY A 10" A2 HOOP.




Expansion of the hoop measured at the middle of its length on one diameter.

Interior pressure per square inch.	Fiber stress per square inch.	Expansion in diameter.	Remarks.
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
173	5,000	0.	Initial load.
346	10,000	.0050	
518	15,000	.0099	
691	20,000	.0148	
864	25,000	.0197	
1,037	30,000	.0248	
1,209	35,000	.0294	
1,382	40,000	.0343	
1,555	45,000	.0393	
1,728	50,000	.0443	
1,831	53,000	.0471	
178	5,000	.0022	

Interior pressure per square inch.	Fiber stress per square inch.	Expansion in diameter.	Remarks.
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
1,881	58,000	.....	Applied 25 times.
173	5,000	.0024	
1,881	58,000	.....	Applied 25 times.
173	5,000	.0024	
1,881	58,000	.....	Applied 50 times. Noon intervened after 37th loading.
173	5,000	.0013	
1,881	58,000	.....	Applied 100 times.
173	5,000	.0081	
1,881	58,000	.....	Applied 100 times.
173	5,000	.0019	
1,881	58,000	.....	Applied 100 times.
173	5,000	.0024	
173	5,000	.0008	Rested 16 hours.
1,881	58,000	.....	Applied 100 times.
173	5,000	.0015	
1,866	54,000	.0480	
173	5,000	.0019	
1,935	56,000	.....	Elastic limit.
173	5,000	.0019	
2,004	58,000	.....	
173	5,000	.0218	
2,073	60,000	.....	
173	5,000	.0897	
2,142	62,000	.....	
173	5,000	.1232	
2,211	64,000	.....	
173	5,000	.1556	
2,280	66,000	.....	
173	5,000	.1888	
2,349	68,000	.....	
173	5,000	.2232	
2,419	70,000	.....	
173	5,000	.2600	
2,488	72,000	.....	
173	5,000	.3002	
2,557	74,000	.....	
173	5,000	.3406	
2,626	76,000	.....	
173	5,000	.3815	
2,695	78,000	.....	
173	5,000	.4237	
2,764	80,000	.....	
173	5,000	.4838	
3,239	98,760	.....	Maximum pressure applied.
173	5,000	.8745	

Test of hoop by means of the direct accumulator pressure discontinued.

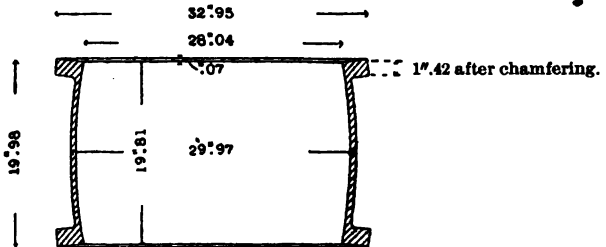Hoop removed from testing attachment and measured as follows:




Expansion in diameter, ".8745=3 per cent.  
Flanges chamfered at the outer edge to a length of 1".42.



Hoop returned to the testing attachment and connections made with high pressure auxiliary cylinder.

Interior pressure per square inch.	Fiber stress per square inch.	Remarks.	
<i>Pounds.</i> 3, 321	<i>Pounds.</i> 96, 127	Auxiliary cylinder recharged between times of applying the pressures. Load reduced about one-half at the time.	
3, 410	96, 696	Lower packing of hoop blew out. Under diminished loads, about one-half the original, the circumference of the hoop at the middle of its length measured: After 3,419 pounds per square inch, circumference 96".00; after 3,666 pounds per square inch, circumference 96".37; after 3,744 pounds per square inch, with the pressure entirely removed, circumference 96".69=5.76 per cent extension. At the ends of the hoop, under the flanges, the interior diameter was 27".98 to 29".00.	
3, 500	101, 294		
3, 556	102, 911		
3, 656	105, 825		
3, 730	107, 963		
3, 734	108, 078		
Hoop removed from attachment, ends faced and chamfered an additional 1/8". Test resumed.			
3, 846	111, 811	Circumference 98".15 under 1,200 pounds per square inch interior pressure.	
3, 908	112, 957		
3, 947	114, 227		
3, 969	114, 891		
4, 014	116, 190		
4, 047	117, 142		
4, 058	117, 460		
Lower packing blew out. Hoop removed from the attachment, ends again faced and chamfered 1/8" additional. Length of flanges after chamfering are now 1".30.			
During the last stage of testing the clearance (1") provided in the recess of the cap of the testing attachment was exhausted, necessitating further chamfering. The hoop showed marked local bulging on one side.			
Ends were again faced and flanges rechamfered.			
4, 070	117, 806	Circumference, 102".00 under 1,000 pounds per square inch interior pressure.	
4, 108	118, 759	Circumference, 102".50 under 1,000 pounds per square inch interior pressure.	
4, 137	119, 740	Circumference, 103".12 under 1,000 pounds per square inch interior pressure.	
2, 236	64, 720	Rested under this load 1 hour and 20 minutes.	
4, 159	120, 375	Circumference, 103".82 under 1,000 pounds per square inch interior pressure.	
4, 159	120, 375	Circumference, 104".06 under 1,000 pounds per square inch interior pressure.	
4, 171	120, 722	Circumference, 104".45 under 1,000 pounds per square inch interior pressure=14.2 per cent expansion.	

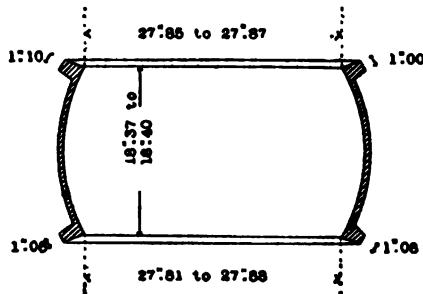Packing blew out at lower end of hoop.  
Hoop removed from testing fixture and measured as follows:



The middle part of the hoop was bulged on one side beyond the outer line of the flanges.

Hoop and fixture dismantled. The hoop was bored out at the ends, restoring the diameter to 28".1 for a length of  $\frac{3}{8}$ " to  $\frac{1}{4}$ " at each end. The body and cap of the testing fixture were each turned to 28".1 diameter to fit the interior diameter of the hoop, which they entered  $\frac{1}{4}$ " at each end. The cap was further recessed to a total depth of  $3\frac{1}{4}$ ", and both the cap and flange at the base of the hoop were chamfered.

After an interval of nine days the modified parts were reassembled and the testing was resumed. The hydraulic packings were brought to a condition of action and the hoop kept under an interior pressure ranging from 2,800 to 2,600 pounds per square inch over night. This interval was followed by the application of higher pressures, as follows:

Interior pressure per square inch.	Fiber stress per square inch.	Remarks.
<i>Pounds.</i>	<i>Pounds.</i>	
4,187	121,184	Rested 1 hour.
8,181	90,614	
4,227	122,888	
2,286	64,720	Circumference, 106".40.
4,288	122,666	
2,286	64,720	Auxiliary cylinder was recharged at frequent intervals.
4,255	123,147	
4,272	123,637	
2,286	64,720	Circumference, 106".8=16.8 per cent expansion.

The hoop shortened rapidly in length, accompanying the circumferential expansion, rendering it desirable to employ exterior staves acting against the flanges to prevent the ends of the hoop drawing off the entering shoulders of the testing fixture. The staves were secured in position by means of a heavy encircling band and the use of steel wedges. The staves made contact with the hoop against the flanges and fillets only, clear space being preserved for further expansion at the middle part. Owing to leakage about the packings, which manifested itself subsequently to the last period of loading, induced during screwing down the cap of the testing fixture to shorten the attachment, it was now necessary to apply the higher interior pressures by pumping directly into the fixture. Connections were made with the auxiliary cylinder, the reaction against the piston was weighed upon the scale of the testing machine while the pressures were advanced by the accumulator pump. For the time being, the accumulator pump was worked under higher steam pressure than usual, beyond the capacity of the accumulator itself and its pressure gauge, both of which were temporarily disconnected, the cross-over connections with the auxiliary cylinder serving as the means of arriving at the interior pressure of the hoop.

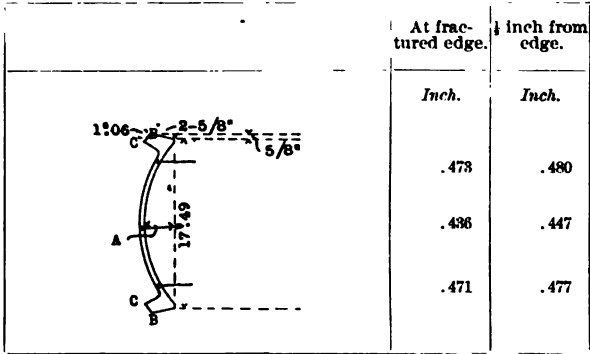
The interior pressure was now increased until the rupture of the hoop was effected, which occurred under a load of 38,900 pounds on the piston of the auxiliary cylinder, which gives 4,361 pounds per square inch interior pressure.

Referred to the original dimensions of the hoop, the fiber stress corresponding to this interior pressure is 125,889 pounds per square inch.

After rupture the circumference at middle of length and exterior of hoop measured 108".33=18.5 per cent expansion.

At the ends of the fillets, under the flanges, the circumferences measured 96".42 and 96".37.

Fracture began at the exterior surface of the hoop ".9 from the middle of its length, and extended longitudinally through each flange. The fractured surface was granular, radiating from the point of commencement. Along the fractured edge and  $\frac{1}{2}$ " distance therefrom the metal was drawn down to the following thicknesses:




The versed sines A of chord at the different quarters were 2".84, 2".71, 3".10 and 2".96, the first mentioned being taken next the line of fracture. The present length at the interior surface was 17".49, being reduced from the original length of 20" in part by the bulging of the walls and in part by the successive facings in the lathe during chamferings.

The rent showed a maximum opening at the place where rupture began, and here the fractured ends were 8".12 apart, at the lower fillet 7".40, and at the upper fillet 7".17.

An oblique fracture began in the upper half, extending in an irregular course  $4\frac{1}{2}$ ". The latter appeared to be a secondary line of fracture, developed in respect to relative time after the separation of the metal in the lower half of the hoop.

The metal along the corners B, shown in the above sketch, was compressed during the progress of the test. At corners C the metal was extended, a result which followed the general distortion of the flanges.

During the last stage of the test a number of cracks having a longitudinal direction were developed on both the exterior and interior surfaces. The lengths of these cracks ranged from ".05 to ".18.




---

---

**PHOTOGRAPHS SHOWING APPEARANCE OF STREAKED  
AND UNSTREAKED HOOPS DURING AND  
AFTER HYDROSTATIC TESTS.**

---

---





NO. 1.

STEAKED WAVE (1949).

POSITION OF PRINCIPAL STEAK AREA HERE HAS BEEN LOCATED WITH 100 YARDS  
ACCURACY IN THIS ONE. BURTON HAS BEEN IDENTIFIED AT THIS PLACE.









Fig. 2.

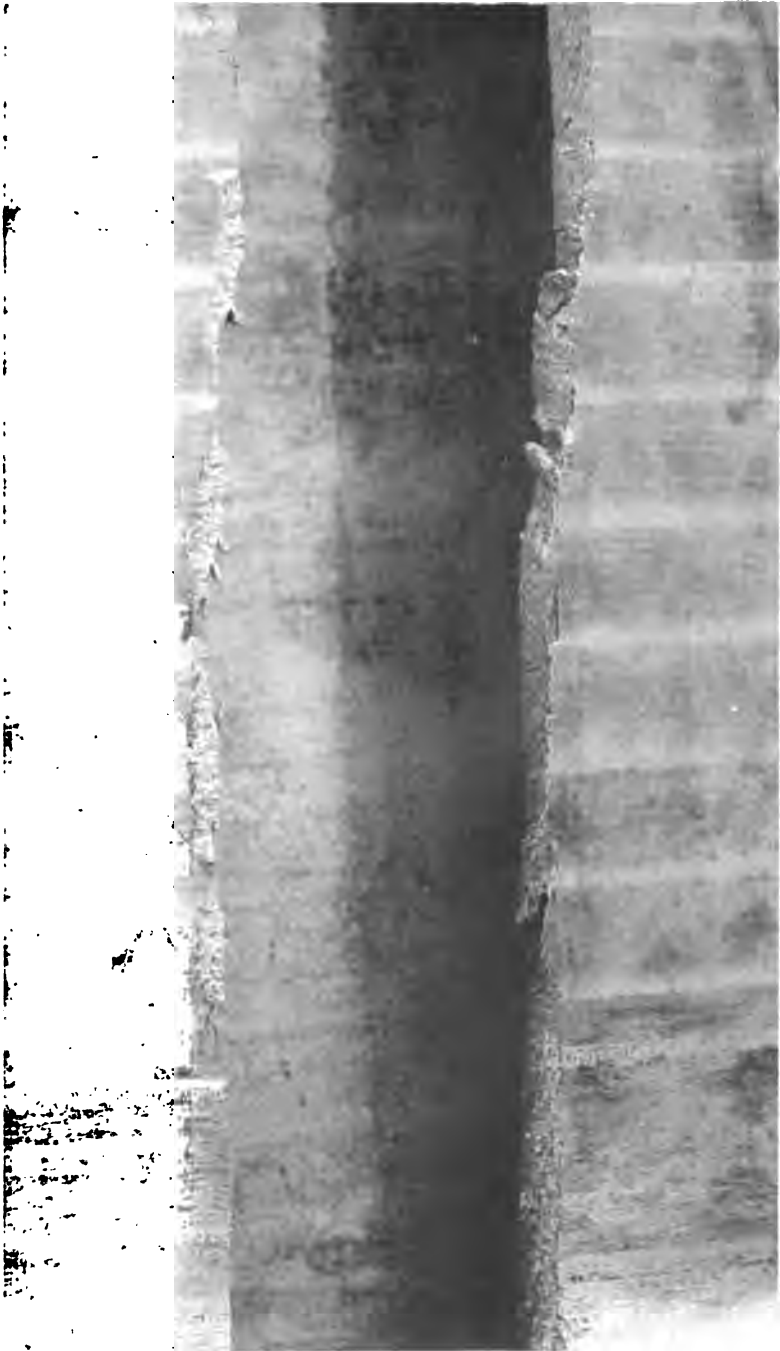REACTOR HOOD 11043 BX. APPEARANCE AFTER FRACTURE.  
CRACK BEGAN AT STREAK AND EXTENDED LONGITUDINALLY IN EACH  
DIRECTION THROUGH THE FLANGES.





NO. 3.

STREAKED HOOP 17093 B3.

FRONT VIEW OF THE LINE OF FRACTURE AT THE PRINCIPAL STREAK.





NO. 4.

STREAKED HOOP 1.093 H3.


VIEW OF PART OF THE FRACTURED SURFACE, AT THE PRINCIPAL STREAK.





NO. 5.

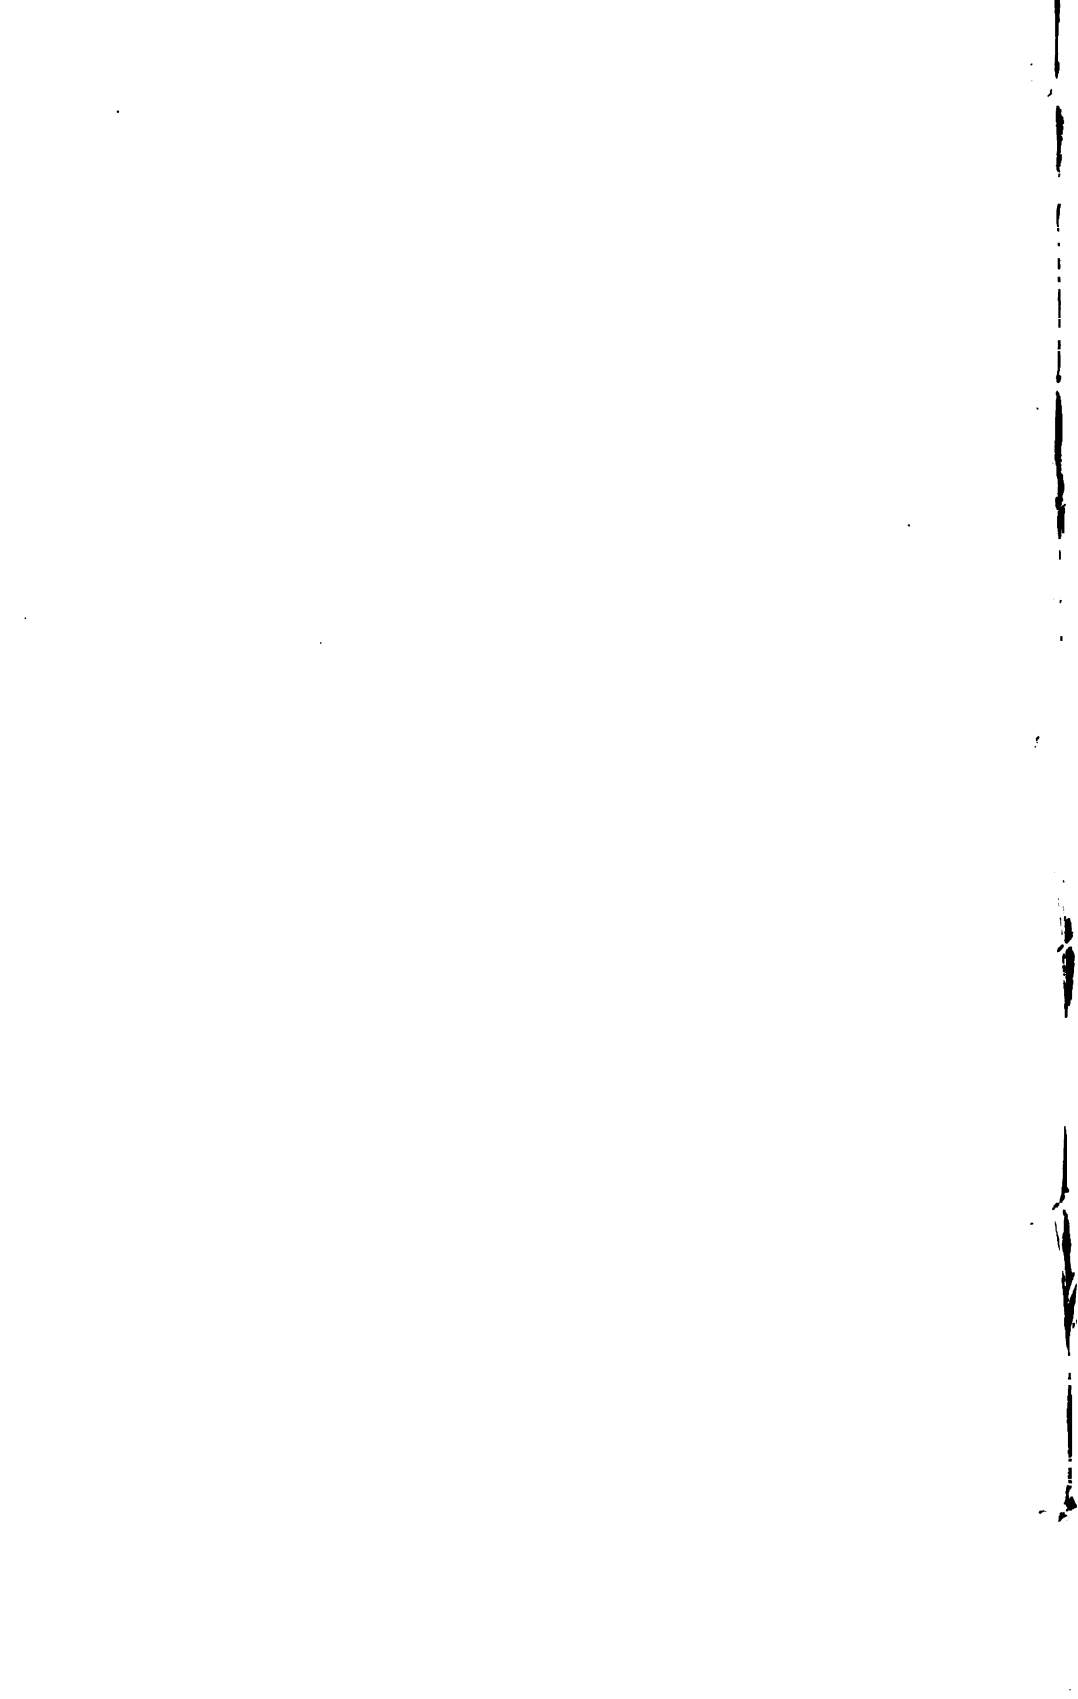UNSTREAKED HOOP 17959 B4, AFTER FRACTURE. RUPTURE BEGAN 9 INCHES FROM THE MIDDLE OF LENGTH OF HOOP,  
EXTENDING THROUGH THE FLANGES. A SECONDARY FRACTURE STARTED IN THE UPPER HALF,  
TAKING AN OBLIQUE COURSE.







NO. 6.

UNSTREAKED HOOP 17959 B4.

GENERAL VIEW OF THE FRACTURED SURFACE.






NO. 2.  
UNSTREAKED HOOD 11496 (4).  
VIEW OF PART OF THE FRACTURED SURFACE.





NO. 8

SLACKED AND UNSTRAKED HIPS AND AFTER 100 TIMES, SHOWING THE ULTIMATE  
 ULTIMATE DISTORTION OF THE WIRE.  
 THE UPPER HIPS, STRAIGHT, STREAKLESS. THE LOWER HIPS, DISTORTED, UNSTRAKED





NO. 9

STRAINED HOLE FROM BR. WATER FRACTURE  
FROM NEXT STREAKS ON THE OUTSIDE AND IN THE POLYMER WENT TO JELLY  
MAGNIFICATION 1000 MICRONS.








NO. 10

THE SKULL OF THE BENTONIAN  
MINIMUM STAGE DEVELOPMENT OF THE  
STEARNSIA, IN THE TERTIARY  
MAGNIFICENT TRIASSIC





NO. 11

UNTREATED HOOK 1001B4 AFTER 48 HOURS

INTERNAL SURFACE, INTERIOR SURFACE, AND EXTERIOR SURFACE OF REPAIR TUBE

EXTERNAL SURFACE, RESPECTIVELY.

MAGNIFICATION 100 X.



---

---

**ROCKER BLOCK AND TRACK BLOCKS.**

---

---



## COMPRESSION TESTS OF ROCKER BLOCK AND TRACK BLOCKS.

## FIRST SERIES.

The material tested consisted of a rocker block of cast steel and track blocks of cast iron, cast steel, and forged steel, all of No. 2 grade of metal. The Midvale Steel Company furnished the castings for the rocker block and one of the track blocks. A duplicate cast steel track block was procured from the United States Steel Company, West Everett, Mass. The cast iron and forged steel blocks were from the arsenal shops. Their dimensions were 12" square by 6" thick. The rocker block was tested successively with the cast iron track block, the cast steel (Midvale) block, the forged steel, and finally the cast steel (Everett) block. The working faces of the blocks were carefully finished after machining, by hand scraping, to surfaces closely approaching true planes on the track blocks and to a cylindrical surface of 114" radius on the rocker block.

In the first series of tests loads were applied not exceeding 400,000 pounds. In the second series the full capacity of the testing machine, 800,000 pounds, was employed. The details of the tests are reported in the order taken. A gauged length of 5" was established on the ends of the pair of blocks being tested, symmetrical with the junction of the pieces and across the middle of their width. The direct compressions of the test pieces were determined by a micrometer covering this gauged length. Upon the completion of the two principal series of observations, sheets of thin tissue paper, one at a time, were placed between the working faces and loads applied for the purpose of securing an impression on the paper representing approximately the width of the surface in contact at different pressures. This was followed by micrometer observations on the lateral movement of the metal of the blocks, taken normal to the line of pressures applied, and normal also to the elemental line of contact on the working faces, and finally by means of a caliper arm the longitudinal extension of the metal of the rocker block was determined in two places, near the line of contact and at a place nearer the middle of the block. The strains developed during the tests were apparently within the elastic limits of the metals, excepting in the Everett cast steel track block, which showed the presence of sets, slowly increasing with loads of 600,000 pounds and upward.

There were negative sets, generally of small magnitude, which persistently appeared and have not yet been satisfactorily accounted for. Their presence led to extended observations, which, while not explaining the minus readings, showed otherwise uniformity of behavior throughout the tests. The effects of loads below 100,000 pounds pressure were observed to show the general behavior and judge of the adjustment of the blocks in the testing machine.

The results with the cast iron track block showed a total compression of ".0030 under 400,000 pounds, or ".0025 between the loads 100,000 and 400,000 pounds. In like manner the test with the cast steel (Midvale) block showed a total compression of ".0025, or ".0020 compression above 100,000 pounds load. The forged steel and the Everett cast steel blocks furnished almost identical results with the first cast steel piece. With the Everett cast steel block a series of micrometer read-

ings were taken under both ascending and descending loads, which showed the two paths coincided.

Higher pressures, increased to a maximum of 800,000 pounds, were next applied, returning to the use of the cast iron track block, and using the succeeding blocks in the same order as before. Minus sets still appeared, found upon release to the initial load. Repeated observations showed a satisfactory behavior in the rate and uniformity of compression between the limits of 100,000 and 800,000 pounds. Disregarding the minus readings, three of the blocks endured the full load of the testing machine—800,000 pounds—without appreciable injury. The Everett cast steel block displayed a plus set after receiving a load of 600,000 pounds, which was gradually increased under higher stresses, and reached ".0007 after 800,000 pounds was applied. The rocker block already having been loaded several times with 800,000 pounds, this permanent set must have been confined to the track block alone.

The direct compression of the individual blocks was next determined. The gauged length of 5" was taken wholly on the rocker block, with one extremity  $\frac{1}{4}$ " from the working face, the other  $5\frac{1}{4}$ " away, and making similar observations on the track block. The blocks compressed ".0030 and ".0031, respectively, between the loads 100,000 and 800,000 pounds, aggregating a movement of ".0061, which, being greater than observed on the gauged length taken  $2\frac{1}{4}$ " on each block, shows an appreciable movement beyond the limits of the original gauged length taken from block to block.

The next observations were made on the lateral movement of the metal in the blocks. Gauged lengths of 5" each, across the ends of the blocks, normal to the direction of the applied loads, were established at different distances,  $\frac{1}{4}$ " to 5" from the working faces. A few measurements were made on gauged lengths of 3" and 9". The more complete results on the 5" gauged lengths showed in the rocker block, at the distance of  $\frac{1}{4}$ " from the working face, a lateral movement inward, or of compression, of ".0007. At  $\frac{3}{8}$ " from the face no lateral movement was found. At the more remote distances of  $1\frac{1}{2}$ " to 5" the lateral movement was in the opposite direction; that is, outward or in a tensile direction, the maximum reading being ".0010. The cast steel (Everett) track block behaved in the same manner and developed strains of nearly the same magnitude.

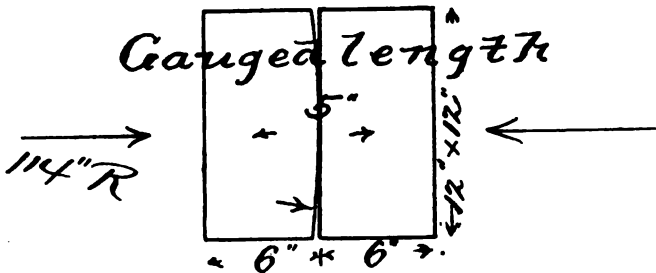
These results on lateral movements show that the blocks, notwithstanding the rigidity of their proportions and the parts of the testing machine against which they abutted, acted as beams and were sensibly bent by the pressures employed. The metal on the side directly loaded was in compression, the opposite side in tension. The neutral axis was not found at the center of the cross section, but nearer the working face. This eccentric position is attributed to the combined effects of the direct compression, tending toward lateral expansion, and the bending of the blocks as beams, tending toward compression on the side having the working face.

Final observations were made on the longitudinal endwise extension of the rocker block, measured by means of a caliper arm over the end surfaces, in a direction parallel to the line of contact with the track block. At a distance of  $\frac{1}{4}$ " from the working face the longitudinal extension was found to be ".0017 under 800,000 pounds, while at a distance of  $2\frac{1}{4}$ " from the face the longitudinal extension was about one-half the above amount.



A method for the exact determination of "the amount of elastic and permanent contact" has not been found. There is varying intensity of the stresses, due to the shape and dimensions of the blocks, and the careful observations made indicate the direction and extent of the principal strains developed and help to show the difficulties in any attempt to determine with precision further characteristics of the surfaces. The common method of judging, in an approximate manner, of the extent of the contact surfaces was employed on this occasion. A thin tissue paper was placed between the working faces, different pressures applied, and the impressions on the paper examined. Paper about  $.0012$  thick was used. It required 10,000 pounds compression to make a permanent impression. The impression, at first vague, becomes more distinct as the loads are increased. Under 800,000 pounds the width of the impression was about  $1''.8$  with the forged steel track block and about  $2''$  with the cast iron block.

## GENERAL RESULTS.



COMPRESSION MEASURED ON A GAUGED LENGTH OF  $5''$ , ONE-HALF THE DISTANCE ON EACH BLOCK, AND ACROSS THE MIDDLE OF WIDTH.

## FIRST SERIES.

[Loads between 100,000 pounds and 400,000 pounds.]

Applied loads.	Compression. Rocker block tested with track blocks of—			
	Cast iron.	Cast steel (Midvale).	Forged steel.	Cast steel (Everett).
Pounds.	Inch.	Inch.	Inch.	Inch.
100,000	0.	0.	0.	0.
150,000	.0005	.0004	.0004	.0004
200,000	.0009	.0007	.0007	.0007
250,000	.0013	.0011	.0010	.0011
300,000	.0017	.0015	.0014	.0014
350,000	.0021	.0018	.0017	.0017
400,000	.0025	.0020	.0020	.0020

ROCKER BLOCK AND TRACK BLOCKS.

SECOND SERIES.

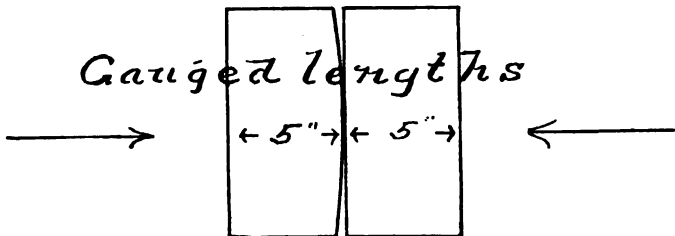
[Loads between 100,000 pounds and 800,000 pounds.]

Compression. Rock block tested with track blocks of—					
Applied loads.	Cast iron.	Cast iron block readjusted.	Cast steel (Midvale).	Forged steel.	Cast steel (Everett).
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.
100,000	0.	0.	0.	0.	0.
200,000	.0008	.0008	.0007	.0006	.0008
300,000	.0017	.0017	.0014	.0013	.0014
400,000	.0024	.0024	.0020	.0019	.0019
450,000	.0027	.....	.0023	.0021	.0022
500,000	.0031	.....	.0025	.0023	.0025
550,000	.0034	.....	.0028	.0026	.0028
600,000	.0037	.0036	.0030	.0029	a .0031
650,000	.0041	.....	.0033	.0031	a .0034
700,000	.0044	.0042	.0034	.0034	a .0037
750,000	.0047	.....	.0037	.0036	a .0040
800,000	.0051	.0047	.0039	.0037	a .0043

a These figures include set.

AMOUNT OF COMPRESSION OF INDIVIDUAL BLOCKS.


ROCKER BLOCK AND CAST STEEL (EVERETT) TRACK BLOCK.



Gauged lengths established as shown on the above sketch.

Applied loads.	Measurements taken on—		Remarks.
	Rocker block.	Track block.	
Pounds.	Inch.	Inch.	Initial reading.
100,000	0.	0.	
400,000	.0014	.0015	
800,000	.0030	.0031	

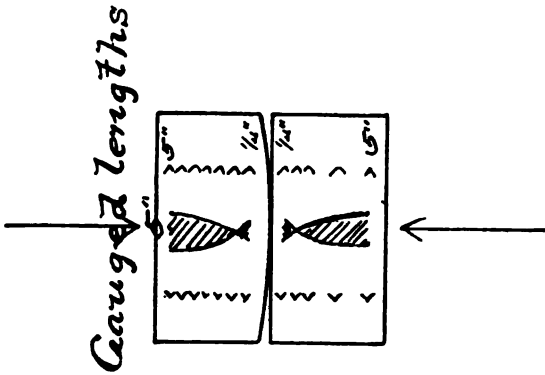LATERAL MOVEMENT OF BLOCKS.



Applied loads.	Observations on rocker block on 5" transverse gauged lengths taken at the following distances from the working face:						
	1/2 inch.	1 inch.	1 1/2 inches.	2 inches.	3 1/2 inches.	4 inches.	5 inches.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.
5,000	0.	0.	0.	0.	0.	0.	0.
800,000	.0007	0.	.0004	.0007	.0009	.0010	.0010

3" GAUGED LENGTH.

800,000	.0006	.....	.....	.....	.....	.....
---------	-------	-------	-------	-------	-------	-------

9" GAUGED LENGTH.

800,000	.0006	.....	.....	.....	.....	.0016
---------	-------	-------	-------	-------	-------	-------

DIRECTION OF ABOVE LATERAL MOVEMENTS.

.....	Inward.	Neutral.	.....	Outward.
-------	---------	----------	-------	----------

Applied loads.	Observations on cast steel (Everett) track block on 5" transverse gauged lengths taken at the following distances from the working face:				
	1/2 inch.	1 inch.	1 1/2 inches.	3 inches.	5 inches.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.
5,000	0.	0.	0.	0.	0.
800,000	.0007	0.	.0004	.0010	.0012


9" GAUGED LENGTH.

800,000	.....	.....	.....	.....	.0014
---------	-------	-------	-------	-------	-------

DIRECTION OF ABOVE LATERAL MOVEMENTS.

.....	Inward. Contraction in width.	Neutral.	.....	Outward. Expansion in width of the block.
-------	-------------------------------------	----------	-------	--

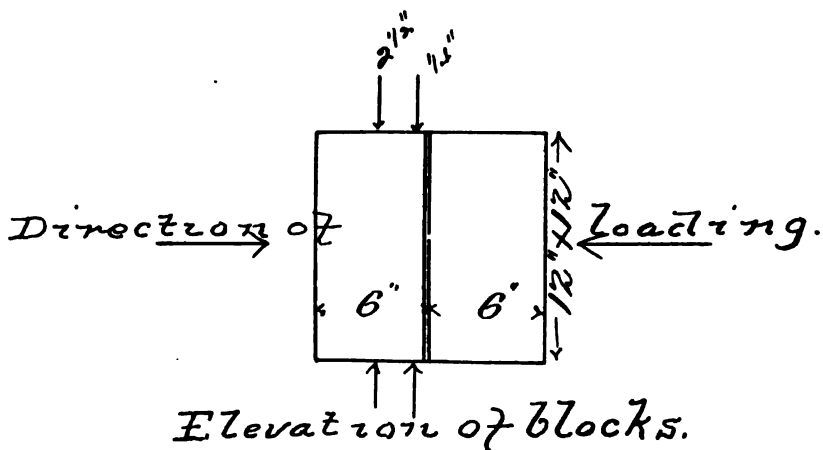LONGITUDINAL EXTENSION, MEASURED OVER ENDS OF ROCKER BLOCK.




Applied loads.	Distance from working face.	
	1/2 inch.	2 1/2 inch.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>
5,000	0.	0.
400,000	.0007	.....
800,000	.0017	.0008

CHEMICAL ANALYSES OF ROCKER BLOCK AND TRACK BLOCKS.

Description.	Carbon.			Manganese.	Silicon.	Sulphur.	Phosphorus.
	Total.	Graphitic.	Combined.				
Cast steel rocker block and track block (Midvale).....			.460	.752	.475	.045	.088
Cast steel track block (Everett).....			.340	.680	.211	.178	.037
Forged steel track block (Watertown Arsenal).....			.430	.762	.347	.070	.086
Cast iron track block (Watertown Arsenal).....	3.100	1.918	1.182	.880	1.300	.048	.463

**COMPRESSION TESTS OF A CAST STEEL ROCKER BLOCK, OF 114" RADIUS OF CURVATURE, WITH TRACK BLOCKS OF DIFFERENT METALS.**

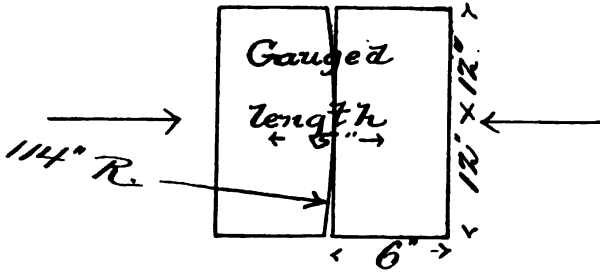DETAILS.



The compressive strains and sets measured on a gauged length of 5". Details of the tests, first stage of loading, up to 400,000 pounds compression.

No. 10443.

CAST IRON TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
10,000	0.	.....	
20,000	0.	.....	
40,000	0.	-.0001	
50,000	.0001	.....	
60,000	.0002	-.0002	
70,000	.0003	.....	
80,000	.0004	-.0002	
90,000	.0005	.....	
100,000	.0005+	-.0002	
120,000	.0007	.....	
150,000	.0010	-.0002	
180,000	.0012	.....	
200,000	.0014	-.0002	
220,000	.0015	.....	
250,000	.0018	-.0003	
300,000	.0022	-.0003	
350,000	.0026	-.0003	
400,000	.0030	-.0003	
400,000	.0030	.....	Rested under load.
400,000	.0031	-.0002	
100,000	.0006	-.0002	

## ROCKER BLOCK AND TRACK BLOCKS.

No. 10444.

## CAST STEEL (MIDVALE) TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
5,000	0.	0.		
10,000	0.	0.		
30,000	0.	0.		
40,000	.0001	-.0001		
60,000	.0002	-.0002		
80,000	.0003	-.0003		
100,000	.0006	-.0001		
120,000	.0007	-.0002		
150,000	.0009	-.0002		
180,000	.0011	-.0002		
200,000	.0012	-.0002		
220,000	.0014	-.0002		
250,000	.0016	-.0002		
300,000	.0020	-.0003		
350,000	.0023	-.0003		
400,000	.0025	-.0003		
400,000	.0025	-.0003		After resting 1 hour.
400,000	.0025	-.0002		
100,000	.0005	-.0002		

No. 10445.

## FORGED STEEL TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
10,000	0.	0.	
30,000	0.	0.	
40,000	.0001	-.0001	
50,000	.0001	-.0002	
50,000	.0001	-.0002	
60,000	.0002	-.0002	
80,000	.0004	-.0002	
100,000	.0005	-.0002	
120,000	.0006	-.0003	
150,000	.0009	-.0003	
180,000	.0011	-.0003	
200,000	.0012	-.0003	
220,000	.0014	-.0003	
250,000	.0015	-.0003	
300,000	.0019	-.0003	
350,000	.0022	-.0003	
400,000	.0025	-.0003	
400,000	.0025	-.0003	After resting 1 hour.
400,000	.0025	-.0003	
100,000	.0005	-.0003	

No. 10446.

CAST STEEL (EVERETT) TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
10,000	0.	.....	
30,000	.0001	.....	
40,000	.0002	.....	
50,000	.0002	-.0001	
60,000	.0008	.....	
80,000	.0004	.....	
100,000	.0006	-.0002	
120,000	.0007	.....	
150,000	.0010	-.0002	
180,000	.0012	.....	
200,000	.0013	-.0002	
220,000	.0015	.....	
250,000	.0017	-.0002	
300,000	.0020	-.0002	
350,000	.0023	-.0002	
400,000	.0025	-.0008	
400,000	.0025	.....	
400,000	.0025+	-.0004	After resting 1 hour.
100,000	.0005	-.0004	
Rested overnight under about 1,000 pounds pressure.			
5,000	.....	-.0001	
100,000	.0005	-.0002	
400,000	.0025	-.0005	
400,000	.0025	-.0004	
400,000	.0025	-.0004	
50,000	.0001	-.0004	
50,000	.0001	.....	
100,000	.0005	.....	
200,000	.0013	.....	
300,000	.0020	.....	
400,000	.0025	.....	
300,000	.0020	.....	
200,000	.0013	.....	
100,000	.0005	.....	
50,000	.0001	-.0004	

TESTS OF BLOCKS UNDER HIGHER PRESSURE.

No. 10443a.

CAST IRON TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
10,000	0.	.....	
50,000	.0008	.....	
100,000	.0007	0.	
150,000	.0011	.....	
200,000	.0015	-.0007	
200,000	.0015	-.0007	Repeated.
50,000	0.	-.0008	
Micrometer removed, cleaned, and returned to position.			
5,000	0.	0.	
50,000	.0008	-.0002	
50,000	.0008	-.0002	
100,000	.0012	-.0002	
150,000	.0016	-.0002	
200,000	.0021	-.0002	
50,000	.0007	.....	
100,000	.0012	.....	
150,000	.0016	.....	
200,000	.0021	.....	
150,000	.0016	.....	
100,000	.0012	.....	
50,000	.0008	-.0002	
250,000	.0025	-.0004	
300,000	.0030	-.0005	
350,000	.0034	-.0008	
50,000	.0004	.....	

ROCKER BLOCK AND TRACK BLOCKS.

CAST IRON TRACK BLOCK—Continued.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
100,000	.0011	.....	
150,000	.0016	.....	
200,000	.0020	.....	
250,000	.0025	.....	
300,000	.0029	.....	
250,000	.0025	.....	
200,000	.0020	.....	
150,000	.0016	.....	
100,000	.0012	.....	
50,000	.0006	.....	
40,000	.0002	.....	
30,000	-.0001	.....	
20,000	-.0004	.....	
10,000	-.0008	.....	
5,000		-.0009	
10,000	-.0007	.....	
20,000	-.0005	.....	
30,000	-.0001	.....	
40,000	+.0002	.....	
50,000	.0004	.....	
40,000	.0002	.....	
30,000	-.0001	.....	
20,000	-.0005	.....	
10,000	-.0008	.....	
5,000		-.0009	
Track block removed from the testing machine and contact surface of each block examined by means of surface plate and curvature gauge. No appreciable change in the shape of the surfaces detected. Track block returned to the machine and readjusted against the rocker block and test resumed.			
5,000	0.	0.	Initial load. Micrometer reset at zero.
10,000	0.	.....	
20,000	0.	.....	
30,000	.0001	.....	
40,000	.0002	.....	
50,000	.0004	.....	
40,000	.0002	.....	
30,000	.0001	.....	
20,000	0.	.....	
10,000	-.0002	.....	
5,000		-.0002	
50,000	.0004	.....	
5,000		-.0002	
100,000	.0008	-.0003	
200,000	.0016	-.0004	
300,000	.0025	-.0004	
1,000		-.0005	
5,000		-.0004	
100,000	.0006	.....	
200,000	.0016	.....	
300,000	.0024	.....	
400,000	.0032	.....	
500,000	.0024	.....	
200,000	.0016	.....	
100,000	.0007	.....	
5,000		-.0005	
50,000	.0001	-.0005	
400,000	.0032	-.0005	
400,000	.0032	-.0007	
450,000	.0035	-.0005	
500,000	.0039	-.0007	
50,000	.0001	.....	
100,000	.0006	.....	
150,000	.0011	.....	
200,000	.0016	.....	
150,000	.0012	.....	
100,000	.0007	.....	
50,000	.0001	-.0007	
550,000	.0042	-.0008	
600,000	.0045	-.0008	
650,000	.0049	-.0008	
700,000	.0052	-.0008	
750,000	.0055	-.0008	
800,000	.0059	-.0008	
50,000	.0005	.....	
100,000	.0010	.....	
150,000	.0015	.....	
200,000	.0020	.....	
250,000	.0024	.....	
300,000	.0028	.....	
350,000	.0032	.....	



CAST IRON TRACK BLOCK—Continued.

Applied loads.	Compression.	Set.	Remarks.
Pounds.	Inch.	Inch.	
400,000	.0085	.....	
350,000	.0082	.....	
300,000	.0028	.....	
250,000	.0024	.....	
200,000	.0020	.....	
150,000	.0015	.....	
100,000	.0010	.....	
50,000	.0006	.....	
5,000		-.0006	
200,000	.0020	.....	
400,000	.0085	.....	
600,000	.0047	.....	
800,000	.0069	.....	
600,000	.0048	.....	
400,000	.0037	.....	
200,000	.0021	.....	
5,000		-.0006	
5,000		-.0002	After resting 16 hours under 5,000 pounds load.
10,000	-.0001	.....	
20,000	0.	.....	
30,000	+.0003	.....	
40,000	.0005	.....	
50,000	.0006	-.0002	
100,000	.0010	-.0002	
200,000	.0018	-.0002	
300,000	.0027	-.0002	
400,000	.0035	-.0002	
500,000	.0042	-.0002	
600,000	.0047+	-.0002	
700,000	.0053	-.0002	
800,000	.0059	-.0002	
5,000		+.0004	After resting under the initial load 30 hours.
50,000	.0007	.....	(Temperature of room lower.)
100,000	.0011	.....	
150,000	.0015	.....	
200,000	.0020	.....	
250,000	.0023	.....	
300,000	.0028	.....	
250,000	.0024	.....	
200,000	.0020	.....	
150,000	.0015	.....	
100,000	.0011	.....	
50,000	.0007	.0003	
100,000	.0011	.....	
200,000	.0020	.....	
400,000	.0035	.....	
600,000	.0048	.....	
800,000	.0060	.....	
600,000	.0049	.....	
400,000	.0037	.....	
200,000	.0022	.....	
100,000	.0012	.0004	
Blocks readjusted.			
5,000	.0002	.....	
50,000	.0004	.....	
100,000	.0008	.....	
200,000	.0016	.....	
300,000	.0025	.....	
400,000	.0032	.....	
500,000	.0039	.....	
600,000	.0044	.....	
700,000	.0050	.....	
800,000	.0055	.....	
700,000	.0051	.....	
600,000	.0045	.....	
500,000	.0040	.....	
400,000	.0034	.....	
300,000	.0027	.....	
200,000	.0019	.....	
100,000	.0010	.....	
50,000	.0004	-.0004	
50,000	.0003	.....	
100,000	.0008	.....	
200,000	.0017	.....	
300,000	.0025	.....	
400,000	.0033	.....	
300,000	.0026	.....	
200,000	.0018	.....	
100,000	.0009	.....	
50,000	.0004	-.0004	

No. 10444a.

CAST STEEL (MIDVALE) TPACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
50,000	.0004	-.0001	
100,000	.0008	-.0001	
150,000	.0012	-.0001	
200,000	.0015	-.0001	
250,000	.0019	-.0001	
300,000	.0022	-.0001	
350,000	.0025	-.0001	
400,000	.0028	-.0002	
450,000	.0031	-.0002	
500,000	.0033	-.0002	
550,000	.0036	-.0002	
600,000	.0038	-.0002	
650,000	.0041	-.0002	
700,000	.0042	-.0002	
750,000	.0045	-.0002	
800,000	.0047	-.0002	
50,000	.0004	.....	
100,000	.0008	.....	
200,000	.0015	.....	
300,000	.0022	.....	
400,000	.0028	.....	
500,000	.0034	.....	
600,000	.0038	.....	
700,000	.0043	.....	
800,000	.0047	.....	
700,000	.0043	.....	
600,000	.0039	.....	
500,000	.0034	.....	
400,000	.0029	.....	
300,000	.0023	.....	
200,000	.0016	.....	
100,000	.0009	.....	
50,000	.0004	-.0005	
Rested under initial load 16 hours.			
5,000	+.0001	.....	
50,000	.0006	.....	
100,000	.0010	.....	
200,000	.0016	.....	
300,000	.0023	.....	
400,000	.0029	.....	
300,000	.0023	.....	
200,000	.0017	.....	
100,000	.0010	.....	
50,000	.0006	+.0001	
100,000	.0010	.....	
200,000	.0017	.....	
300,000	.0023	.....	
400,000	.0029	.....	
500,000	.0034	.....	
600,000	.0039	.....	
700,000	.0044	.....	
800,000	.0048	.....	
700,000	.0044	.....	
600,000	.0039	.....	
500,000	.0035	.....	
400,000	.0030	.....	
300,000	.0024	.....	
200,000	.0017	.....	
100,000	.0010	+.0001	

No. 10445a.

FORGED STEEL TRACK BLOCK.


Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
50,000	.0008	0.	
100,000	.0008	0.	
150,000	.0012	0.	
200,000	.0014	0.	
250,000	.0018	0.	
300,000	.0021	-.0001	
350,000	.0024	-.0001	
400,000	.0027	-.0001	
450,000	.0029	-.0001	
500,000	.0031	-.0001	
550,000	.0034	-.0001	
600,000	.0037	-.0001	
650,000	.0039	-.0001	
700,000	.0042	-.0001	
750,000	.0044	-.0001	
800,000	.0045	-.0001	
50,000	.0008	.....	
100,000	.0007	.....	
200,000	.0015	.....	
300,000	.0022	.....	
400,000	.0027	.....	
500,000	.0032	.....	
600,000	.0037	.....	
700,000	.0042	.....	
800,000	.0045	.....	
700,000	.0042	.....	
600,000	.0037	.....	
500,000	.0032	.....	
400,000	.0027	.....	
300,000	.0022	.....	
200,000	.0015	.....	
100,000	.0007	.....	
50,000	.0003	-.0001	

No. 10446a.

CAST STEEL (EVERETT) TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
50,000	.0008	0.	
100,000	.0007	-.0001	
150,000	.0012	-.0001	
200,000	.0015	-.0001	
250,000	.0018	-.0001	
300,000	.0021	-.0001	
350,000	.0024	-.0001	
400,000	.0026	-.0001	
450,000	.0029	-.0001	
500,000	.0032	-.0001	
550,000	.0035	0.	
600,000	.0038	+ .0001	
650,000	.0041	.0002	
700,000	.0044	.0003	
750,000	.0047	.0005	
800,000	.0050	.0007	
50,000	.0012	.....	
100,000	.0016	.....	
200,000	.0023	.....	
300,000	.0029	.....	
400,000	.0034	.....	
500,000	.0038	.....	
600,000	.0043	.....	
700,000	.0047	.....	
800,000	.0051	.....	
700,000	.0048	.....	
600,000	.0044	.....	
500,000	.0040	.....	
400,000	.0036	.....	
300,000	.0030	.....	
200,000	.0024	.....	
100,000	.0017	.....	
50,000	.0013	.0008	

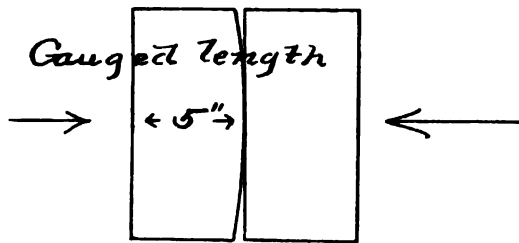MICROMETER OBSERVATIONS TAKEN ON THE ROCKER BLOCK.



Gauged length of 5" established on top surface, one extremity being 1/4" from the element making contact with the Track Block.

No. 10446b.


CAST STEEL (EVERETT) BLOCK USED.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
100,000	.0002	.....	
200,000	.0007	.....	
300,000	.0012	.....	
400,000	.0016	.....	
500,000	.0021	.....	
600,000	.0024	.....	
700,000	.0029	.....	
800,000	.0032	.....	
700,000	.0029	.....	
600,000	.0025	.....	
500,000	.0021	.....	
400,000	.0017	.....	
300,000	.0013	.....	
200,000	.0009	.....	
100,000	.0002	..... .0001	

Gauged length of 5" established on the track block opposite position in preceding test, one extremity being 1/4" from the face next the rocker block.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
100,000	.0004	.....	
200,000	.0009	.....	
300,000	.0014	.....	
400,000	.0019	.....	
500,000	.0022	.....	
600,000	.0025	.....	
700,000	.0031	.....	
800,000	.0035	.....	
700,000	.0031	.....	
600,000	.0025	.....	
500,000	.0024	.....	
400,000	.0019	.....	
300,000	.0015	.....	
200,000	.0010	.....	
100,000	.0005	..... .0004	
800,000	.0035	..... .0004	

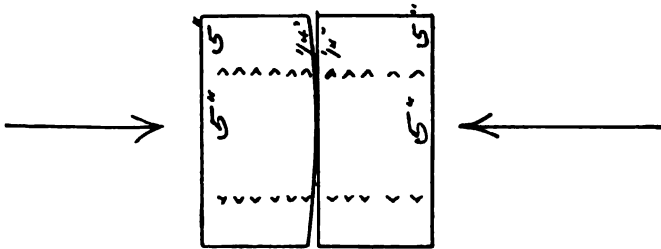TRANSVERSE GAUGED LENGTHS.



Gauged lengths, 5" each.

Everett cast steel track block used in this and subsequent experiments.

No. 10446c.

OBSERVATIONS ON CAST STEEL TRACK BLOCK.

[Transverse gauged length taken  $\frac{1}{2}$ " from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load. Movement is an inward one, a contraction in width of the block.
5,000	0.	0.	
200,000	.0002	.....	
400,000	.0003	.....	
600,000	.0006	.....	
800,000	.0007	.....	
600,000	.0006	.....	
400,000	.0003	.....	
200,000	.0002	.....	
5,000	0.	0.	

[Transverse gauged length taken  $\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load. Movement is an outward one, an expansion in width of the block.
200,000	0.	.....	
400,000	0.	.....	
600,000	.0002	.....	
800,000	.0004	.....	
600,000	.0002	.....	
400,000	.0001	.....	
200,000	0.	.....	
5,000	0.	0.	

[Transverse gauged length taken  $\frac{1}{8}$ " from the working face.]

5,000	0.	0.	Initial load. No lateral movement shown.
200,000	0.	.....	
400,000	0.	.....	
600,000	0.	.....	
800,000	0.	.....	
400,000	0.	.....	
5,000	.....	.0001	

OBSERVATIONS ON THE ROCKER BLOCK.

[Transverse gauged length taken  $\frac{1}{2}$ " from the working face.]

5,000	0.	0.	Initial load. Movement, a contraction in width of the block.
200,000	.0001	.....	
400,000	.0004	.....	
600,000	.0005	.....	
800,000	.0007	.....	
600,000	.0005	.....	
400,000	.0004	.....	
200,000	.0002	.....	
5,000	0.	0.	

ROCKER BLOCK AND TRACK BLOCKS.

OBSERVATIONS ON THE ROCKER BLOCK—Continued.

[Transverse gauged length taken  $\frac{3}{4}$ " from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load. No lateral movement shown.
5,000	0.	0.	
200,000	0.	.....	
400,000	0.	.....	
600,000	0.	.....	
800,000	0.	.....	
400,000	0.	.....	
5,000	0.	0.	

[Transverse gauged length taken  $1\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load. Movement, an expansion in width of the block.
200,000	0.	.....	
400,000	.0001	.....	
600,000	.0008	.....	
800,000	.0004	.....	
600,000	.0008	.....	
400,000	.0008	.....	
200,000	.0001	.....	
5,000	0.	0.	

[Transverse gauged length taken  $2\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load. Movement, an expansion in width of the block.
200,000	.0001	.....	
400,000	.0008	.....	
600,000	.0005	.....	
800,000	.0007	.....	
600,000	.0005	.....	
400,000	.0004	.....	
200,000	.0002	.....	
5,000	0.	.....	

[Transverse gauged length taken  $3\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load. Movement, an expansion in width of the block.
200,000	.0003	.....	
400,000	.0005	.....	
600,000	.0007	.....	
800,000	.0009	.....	
600,000	.0008	.....	
400,000	.0006	.....	
200,000	.0003	.....	
5,000	.....	0.	

[Transverse gauged length taken  $4\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load. Movement, an expansion in width of the block.
200,000	.0002	.....	
400,000	.0005	.....	
600,000	.0008	.....	
800,000	.0010	.....	
600,000	.0008	.....	
400,000	.0006	.....	
200,000	.0004	.....	
5,000	.....	0.	

[Transverse gauged length taken  $5$ " from the working face.]

5,000	0.	0.	Initial load. Movement, an expansion in width of the block.
200,000	.0002	.....	
400,000	.0006	.....	
600,000	.0008	.....	
800,000	.0010	.....	
600,000	.0009	.....	
400,000	.0007	.....	
200,000	.0004	.....	
5,000	.....	0.	

OBSERVATIONS ON THE ROCKER BLOCK—Continued.

[Observations repeated on transverse gauged length  $\frac{1}{4}$ " from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
200,000	.0001	.....	Movement, a contraction in width of the block.
400,000	.0008	.....	
600,000	.0004	.....	
800,000	.0004	.....	
600,000	.0004	.....	
400,000	.0008	.....	
200,000	.0001	.....	
5,000	.....	0.	
800,000	.0004	.....	
5,000	.....	0.	

OBSERVATIONS RENEWED ON TRACK BLOCK.

[Transverse gauged length taken  $\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load.
200,000	.0002	.....	Movement, a contraction in width of the block.
400,000	.0004	.....	
600,000	.0006	.....	
800,000	.0007	.....	
600,000	.0006	.....	
400,000	.0004	.....	
200,000	.0002	.....	
5,000	.....	0.	

[Transverse gauged length taken  $\frac{5}{8}$ " from the working face.]

5,000	0.	0.	Initial load.
200,000	.0008	.....	Movement, an expansion in width of the block.
400,000	.0006	.....	
600,000	.0009	.....	
800,000	.0012	.....	
600,000	.0010	.....	
400,000	.0008	.....	
200,000	.0006	.....	
5,000	.....	0.	

[Transverse gauged length taken  $3\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load.
200,000	.0008	.....	Movement, an expansion in width of the block.
400,000	.0006	.....	
600,000	.0008	.....	
800,000	.0010	.....	
600,000	.0008	.....	
400,000	.0006	.....	
200,000	.0004	.....	
5,000	.....	.0001	

OBSERVATIONS RESUMED ON THE ROCKER BLOCK.

[Transverse gauged length now reduced to  $3$ " and taken  $\frac{1}{4}$ " from the working face.]

5,000	0.	0.	Initial load.
200,000	.0001	.....	Movement, a contraction in width of the block.
400,000	.0008	.....	
600,000	.0004	.....	
800,000	.0006	.....	
400,000	.0008	.....	
5,000	.....	0.	

ROCKER BLOCK AND TRACK BLOCKS.

OBSERVATIONS RESUMED ON THE ROCKER BLOCK—Continued.

[Gauged length now increased to 9" and taken 1/4" from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
200,000	.0001	.....	Movement, a contraction in width of the block.
400,000	.0008	.....	
600,000	.0005	.....	
800,000	.0006	.....	
400,000	.0004	.....	
5,000	.....	0.	

[Gauged length 9" long taken 5" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0006	.....	Movement, an expansion in width of the block.
400,000	.0009	.....	
600,000	.0012	.....	
800,000	.0016	.....	
600,000	.0015	.....	
400,000	.0011	.....	
200,000	.0007	.....	
5,000	.....	0.	

OBSERVATIONS ON TRACK BLOCK AGAIN MADE.

[Gauged length of 9" taken 5" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0004	.....	Movement, an expansion in width of the block.
400,000	.0008	.....	
600,000	.0012	.....	
800,000	.0014	.....	
600,000	.0018	.....	
400,000	.0010	.....	
200,000	.0006	.....	
5,000	.....	.0001	

OBSERVATIONS ON THE ROCKER BLOCK.

[Measurements taken by means of a caliper over the length of the rocker block, in a direction parallel to the contact elements and 1/4" from the working face, at the middle of the width of the block.]

Applied loads.	Longitudinal extension.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	
5,000	0.	Initial load.
400,000	.0007	
800,000	.0017	
5,000	.0002	
800,000	.0017	
5,000	0.	

[Longitudinal measurements taken at a distance of 2 1/4" from the working face. Taken in a line with one extremity of the original 5" gauged length established for measuring the direct compression of the blocks.]

5,000	0.	
800,000	.0008	
5,000	0.	
800,000	.0008	
5,000	0.	

[Caliper returned to position on the length taken 1/4" from the working face.]

5,000	0.	Initial load.
800,000	.0016	
5,000	0.	



## COMPRESSION TESTS OF ROCKER BLOCK AND TRACK BLOCKS.

## SECOND SERIES.

## BLOCKS OF REDUCED LENGTHS.

The rocker block and track blocks were each cut into two parts and tests made on parts which were 6" long. The tests were conducted in the same order as in the original series which were made when the blocks were 12" long, first loading the rocker block with the cast iron track block. Compressions were measured on a gauged length of 5", taken at the middle of the widths of the blocks. After each increment the stress was reduced to the initial load and the sets determined. There were apparently minus sets developed under the earlier loads, which reached a maximum of  $-.0003$  after 250,000 pounds had been applied. At 550,000 pounds the set was in a plus direction, and from this load onward there was a progressive gain, which, after the application of 800,000 pounds, was  $.0019$ .

A series of observations was next taken under ascending and descending stresses. The second application of 800,000 pounds increased the set only  $.0001$ . The blocks, however, having taken jointly a set of  $.0020$ , a part of which set was in each block, it was necessary to rescraper the rocker block to restore its working face to the prescribed curvature, 114" radius. The other three track blocks were in turn loaded in the same manner as above described. The permanent sets developed under the maximum load applied, 800,000 pounds, the capacity of the testing machine, were as follows:

Tests made with the—	Set.
Cast iron track block.....	<i>Inch.</i> .0019
Cast steel (Midvale) track block.....	.0012
Forged steel track block.....	.0008
Cast steel (Everett) track block.....	.0041

Observations on the lateral movement of the blocks next followed, ending with further measurements of the direct compression, or the apparent direct compression of the rocker block with the cast steel (Everett) track block on gauged lengths at the middle of the width of the blocks, near the sides and at intermediate places.

Referring to the numerical values obtained on the direct compression of the blocks, in comparison with the results found when the blocks were of full length, it appears that the relative compression is less now than in the earlier tests, comparing the effects according to the loads per linear inch of contact surface. The following tables are prepared to illustrate the comparative behavior of the blocks when of full length, and at the present time when shortened one-half. The

figures pertaining to the 6" blocks are deduced from the series of ascending and descending loads.

*OBSERVATIONS ON COMPRESSION OF THE ROCKER BLOCK.*

USED WITH CAST IRON TRACK BLOCK.

[Gauged length of 5", taken 2 1/2" on each block.]

Applied loads.	Blocks 12" long.	Blocks 6" long.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
100,000	0.	0.	Initial reading.
200,000	.0006	.0011	
300,000	.0017	.0020	
400,000	.0024	.0028	
500,000	.0031	.0037	
600,000	.0036	.0046	
700,000	.0042	.0052	
800,000	.0047	.0061	

USED WITH CAST STEEL (MIDVALE) TRACK BLOCK.

100,000	0.	0.	Initial reading.
200,000	.0007	.0009	
300,000	.0014	.0016	
400,000	.0020	.0028	
500,000	.0025	.0029	
600,000	.0030	.0036	
700,000	.0034	.0043	
800,000	.0039	.0049	

USED WITH FORGED STEEL TRACK BLOCK.

100,000	0.	0.	Initial reading.
200,000	.0006	.0009	
300,000	.0013	.0016	
400,000	.0019	.0022	
500,000	.0023	.0028	
600,000	.0029	.0035	
700,000	.0034	.0041	
800,000	.0037	.0047	

USED WITH CAST STEEL (EVERETT) TRACK BLOCK.

100,000	0.	0.	Initial reading.
200,000	.0008	.0006	
300,000	.0014	.0012	
400,000	.0019	.0017	
500,000	.0025	.0022	
600,000	a.0030	.0027	
700,000	a.0034	.0032	
800,000	a.0036	.0037	

aSets deducted; resilient movement given.

An inspection of the above tables shows the compressive strains in the half blocks proportionally less than in the whole blocks, the difference almost disappearing in the case of the Everett cast steel track block. The condition of the Everett block at the time this comparison is made in some degree explains the behavior displayed, since it had received a greater permanent set than the other blocks, thereby increasing the contact surface.

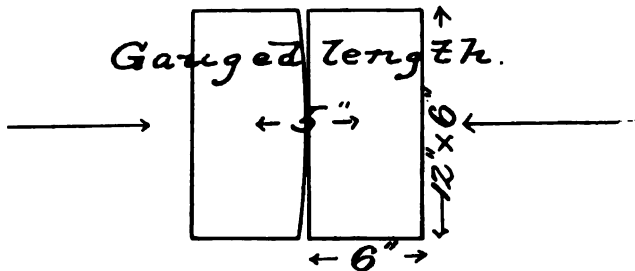
Measurements of the strains in a lateral direction indicate some of

the resultant movements. Both blocks considered as beams show decided bending under load, as evinced by the lateral movements observed on the gauged lengths established normal to the direction of loading, and taken at varying distances of  $\frac{1}{4}$ " to 5" from the working faces. The neutral axes for the lateral strains were eccentric, as before observed, but appeared to be slightly more removed from the working faces than in the earlier series of tests, in this respect the blocks of reduced lengths showing greater freedom in bending. The depths of the blocks necessarily influence their bending resistance, which would be further modified by the support received from the buttresses of the testing machine. The distortion in these tests is thought to be largely due, however, to the dimensions of the blocks, insufficient depth of metal being present to resist the pressures applied. Both blocks bend and develop lateral strains not unlike, although the rocker block rested against an auxiliary buttress 4" deep, while the track block was reenforced by a buttress  $10\frac{1}{4}$ " deep, each clamped in the heads of the testing machine.

Observations on direct compression, as shown by the measurements on gauged lengths established parallel to the direction of loading, were renewed. Across the middle of the width of the blocks, on a gauged length of 10", the compressive strain observed was ".0079 for a load of 800,000 pounds. One-fourth inch from side A the movement was ".0139, and the same distance from side B there was a movement of ".0157, while at intermediate places the movements were ".0100 and ".0114. As the ends closed ".0139 and ".0157, respectively, the mean being ".0148, and the middle closed ".0079, there is a difference shown of ".0069, which is taken to indicate the aggregate bending of both blocks. The closing in at opposite ends was not alike. This depends upon the accuracy of the adjustment of the blocks in the testing machine initially, and upon their symmetrical yielding when permanent sets are developed by the higher loads.

In order to illustrate the effect of change of position, the adjusting screws of the testing machine were moved one turn toward side A, whereupon the resilient movements at sides A and B became ".0120 and ".0180, respectively. A change in position in the opposite direction of one turn of the screws as before, and the movements at sides A and B now were ".0158 and ".0121, respectively.

## GENERAL RESULTS.



Compression measured on a gauged length of 5", one-half of the distance taken on each block, and at the middle of the width,

## ROCKER BLOCK AND TRACK BLOCKS.

## FIRST APPLICATIONS OF LOADS TO BLOCKS OF REDUCED LENGTHS.

[Loads between 100,000 and 800,000 pounds.]

Applied loads.	Compression. Rocker block tested with track blocks of—			
	Cast iron.	Cast steel (Midvale).	Forged steel.	Cast steel (Everett).
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>
100,000	0.	0.	0.	0.
150,000	.0006	.0006	.0005	.0005
200,000	.0011	.0011	.0009	.0009
250,000	.0017	.0016	.0014	.0013
300,000	.0022	.0020	.0017	.0016
350,000	.0027	.0023	.0021	.0020
400,000	.0031	.0027	.0024	.0023
450,000	.0036	.0030	.0027	.0026
500,000	.0042	.0034	.0030	.0029
550,000	.0048	.0038	.0034	.0034
600,000	.0054	.0041	.0037	.0040
650,000	.0060	.0045	.0041	.0050
700,000	.0067	.0050	.0044	.0057
750,000	.0073	.0055	.0049	.0065
800,000	.0080	.0061	.0054	.0072

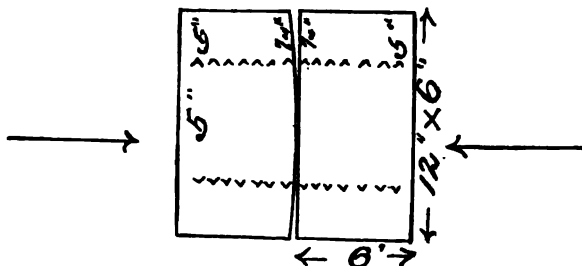
The above compressions include the permanent sets developed by the several blocks when the loads were applied for the first times, sets generally appearing after loads of 500,000 pounds and upwards were applied.

## SECOND APPLICATIONS OF LOADS TO BLOCKS OF REDUCED LENGTHS.

[Loads between 100,000 and 800,000 pounds.]

Applied loads.	Compression. Rocker block tested with track blocks of—			
	Cast iron.	Cast steel (Midvale).	Forged steel.	Cast steel (Everett).
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>
100,000	0.	0.	0.	0.
200,000	.0011	.0009	.0009	.0006
300,000	.0020	.0016	.0016	.0012
400,000	.0028	.0023	.0022	.0017
500,000	.0037	.0029	.0028	.0022
600,000	.0046	.0036	.0035	.0027
700,000	.0052	.0043	.0041	.0032
800,000	.0061	.0049	.0047	.0037

## LATERAL MOVEMENT OF BLOCKS.

*Gauged lengths.*

The direction of the lateral movement is stated in the notations at the foot of the tables.


Applied loads.	Observations on rocker block on 5" transverse gauged lengths taken at the following distances from the working face:						
	½ inch.	¾ inch.	1¼ inches.	2¼ inches.	3¼ inches.	4¼ inches.	5 inches.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.
5,000	0.	0.	0.	0.	0.	0.	0.
800,000	.0016	.0003	.0004	.0010	.0014	.0015	.0019
	Inward.			Outward.			

Applied loads.	Observations on cast steel (Everett) track block on 5" transverse gauged lengths taken at the following distances from the working face:						
	½ inch.	¾ inch.	1¼ inches.	2¼ inches.	3¼ inches.	4¼ inches.	5 inches.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.	Inch.
5,000	0.	0.	0.	0.	0.	0.	0.
800,000	.0021	.0006	.0008	.0009	.0014	.0016	.0021
	Inward.			Outward.			

COMPARISON OF THE DIRECT COMPRESSION OF THE BLOCKS TAKEN AT DIFFERENT PLACES ON THEIR WIDTHS.

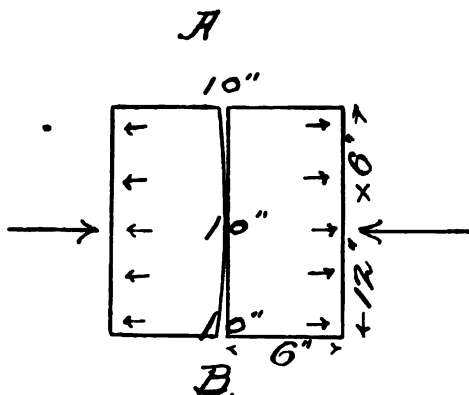Gauged lengths.



ROCKER BLOCK USED WITH CAST STEEL (EVERETT) TRACK BLOCK.

[Gauged lengths, 10".]


Applied loads.	Compression on gauged lengths at—				
	½ inch from side A.	¾ inches from side A.	Middle of width.	¾ inches from side B.	½ inch from side B.
Pounds.	Inch.	Inch.	Inch.	Inch.	Inch.
5,000	0.	0.	0.	0.	0.
800,000	.0139	.0100	.0079	.0114	.0157
Adjusting screws of testing machine moved one turn toward side A.					
800,000	.0120	.....	.....	.....	.0180
Adjusting screws of testing machine moved one turn toward side B.					
800,000	.0158	.....	.....	.....	.0121

**SECOND SERIES OF COMPRESSION TESTS OF A CAST STEEL  
ROCKER BLOCK, OF 114" RADIUS OF CURVATURE, WITH TRACK  
BLOCKS OF DIFFERENT METALS.**

**DETAILS.**

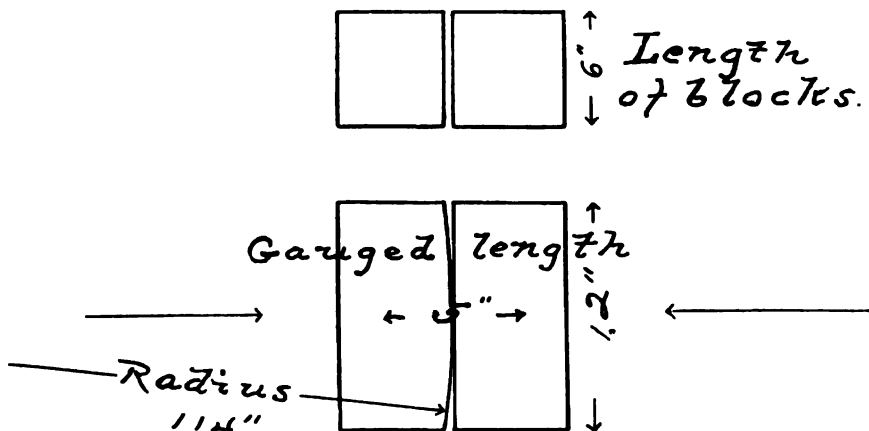**BLOCKS OF REDUCED LENGTHS.**

The rocker block and track blocks were cut into two parts, 6" and 5".3 long, respectively. Test were resumed on the parts 6" long each.



**CAST STEEL (MIDVALE) ROCKER BLOCK USED WITH TRACK BLOCKS  
OF DIFFERENT METALS.**

No. 10443d.

**CAST IRON TRACK BLOCK.**

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
50,000	.0006	-.0001	
100,000	.0013	-.0001	
150,000	.0019	-.0001	
200,000	.0024	-.0002	
250,000	.0030	-.0003	
300,000	.0035	-.0003	
350,000	.0040	-.0003	
400,000	.0044	-.0003	
450,000	.0049	-.0002	
500,000	.0055	-.0001	
550,000	.0061	+.0002	
600,000	.0067	.0005	Rested under 25,000 pounds 16 hours. No change in permanent set.
650,000	.0073	.0007	
700,000	.0080	.0011	
750,000	.0086	.0014	

CAST-STEEL (MIDVALE) ROCKER BLOCK, ETC.—Continued.

CAST IRON TRACK BLOCK—Continued.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i> 800,000	<i>Inch.</i> .0088	<i>Inch.</i> .0019	
100,000	.0088	.....	
200,000	.0044	.....	
300,000	.0068	.....	
400,000	.0061	.....	
500,000	.0070	.....	
600,000	.0079	.....	
700,000	.0085	.....	
800,000	.0094	.....	
700,000	.0086	.....	
600,000	.0080	.....	
500,000	.0078	.....	
400,000	.0065	.....	
300,000	.0066	.....	
200,000	.0047	.....	
100,000	.0086	.0020	

An examination of the working faces of the rocker and track blocks showed the surfaces to be concave ".001 + each, the result of the permanent set acquired during the test.

Placing tissue paper (about ".0012 thick) between working faces of rocker and track blocks and applying pressure, the impression left on the paper measured about 2".45 and 3".20 wide for loads of 400,000 and 800,000 pounds, respectively.

ROCKER BLOCK RESCRAPED TO PRESCRIBED CURVATURE, 114" RADIUS.

No. 10444d.

CAST STEEL (MIDVALE) TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i> 5,000	<i>Inch.</i> 0.	<i>Inch.</i> 0.	Initial load.
50,000	.0007	0.	
100,000	.0014	0.	
150,000	.0020	0.	
200,000	.0025	0.	
250,000	.0030	0.	
300,000	.0034	0.	
350,000	.0037	0.	
400,000	.0041	0.	
450,000	.0044	0.	
500,000	.0048	+.0001	
550,000	.0052	.0001	
600,000	.0055	.0002	
650,000	.0059	.0004	
700,000	.0064	.0006	
750,000	.0069	.0009	
800,000	.0075	.0012	
100,000	.0026	.....	
200,000	.0035	.....	
300,000	.0042	.....	
400,000	.0049	.....	
500,000	.0055	.....	
600,000	.0062	.....	
700,000	.0069	.....	
800,000	.0075	.....	
700,000	.0070	.....	
600,000	.0064	.....	
500,000	.0057	.....	
400,000	.0050	.....	
300,000	.0044	.....	
200,000	.0036	.....	
100,000	.0027	.0014	

ROCKER BLOCK AND TRACK BLOCKS.

No. 10445d.

FORGED STEEL TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
50,000	.0007	0.	
100,000	.0012	0.	
150,000	.0017	0.	
200,000	.0021	+.0001	
250,000	.0025	.0001	
300,000	.0029	.0001	
350,000	.0033	.0001	
400,000	.0036	.0001	
450,000	.0039	.0001	
500,000	.0042	.0001	
550,000	.0046	.0001	
600,000	.0049	.0002	
650,000	.0053	.0002	
700,000	.0056	.0004	
750,000	.0061	.0006	
800,000	.0066	.0008	
100,000	.0020	-----	
200,000	.0029	-----	
300,000	.0036	-----	
400,000	.0042	-----	
500,000	.0048	-----	
600,000	.0055	-----	
700,000	.0061	-----	
800,000	.0067	-----	
700,000	.0062	-----	
600,000	.0056	-----	
500,000	.0051	-----	
400,000	.0044	-----	
300,000	.0038	-----	
200,000	.0031	-----	
100,000	.0022	.0010	

No. 10446d.

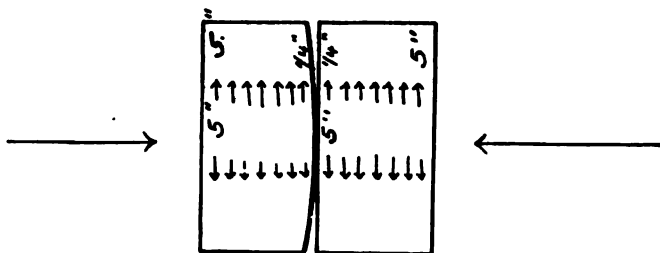
CAST STEEL (EVERETT) TRACK BLOCK.

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
5,000	0.	0.	
50,000	.0008	0.	
100,000	.0012	0.	
150,000	.0017	0.	
200,000	.0021	0.	
250,000	.0025	0.	
300,000	.0028	0.	
350,000	.0032	0.	
400,000	.0035	0.	
450,000	.0038	0.	
500,000	.0041	.0001	
550,000	.0046	.0006	
600,000	.0052	.0011	
650,000	.0062	.0020	
700,000	.0069	.0026	
750,000	.0077	.0033	
800,000	.0084	.0041	
100,000	.0049	-----	
200,000	.0055	-----	
300,000	.0061	-----	
400,000	.0066	-----	
500,000	.0071	-----	
600,000	.0076	-----	
700,000	.0081	-----	
800,000	.0086	-----	
700,000	.0083	-----	
600,000	.0079	-----	
500,000	.0074	-----	
400,000	.0069	-----	
300,000	.0061	-----	
200,000	.0058	-----	
100,000	.0052	.0043	



LATERAL MOVEMENT OF BLOCKS.

Gauged lengths.



OBSERVATIONS ON CASTS TEEL (EVERETT) TRACK BLOCK; TRANSVERSE GAUGED LENGTH 5".

No. 10446e.

[1" from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load. Movement is an inward one, a contraction in the width of the block.
5,000	0.	0.	
200,000	.0010	.....	
400,000	.0015	.....	
600,000	.0019	.....	
800,000	.0021	.....	
600,000	.0019	.....	
400,000	.0015	.....	
200,000	.0010	.....	
5,000	.....	0.	

[5" gauged length, 1/2" from the working face.]

5,000	0.	0.	Initial load. Movement is a contraction in width.
200,000	.0004	.....	
400,000	.0006	.....	
600,000	.0007	.....	
800,000	.0006	.....	
600,000	.0006	.....	
400,000	.0005	.....	
200,000	.0005	0.	
200,000	.0004	.....	
400,000	.0005	.....	
600,000	.0006	.....	
800,000	.0006	.....	
600,000	.0006	.....	
400,000	.0005	.....	
200,000	.0004	.....	
100,000	.0003	.....	
50,000	.0001	0.	

[5" gauged length, 1 1/2" from the working face.]

5,000	0.	0.	Initial load. Movement is a contraction in width at 200,000 pounds, return to original length at 400,000 pounds, and an expansion at 600,000 and 800,000 pounds.
200,000	+ .0001	.....	
400,000	0.	.....	
600,000	- .0001	.....	
800,000	- .0008	.....	
600,000	- .0001	.....	
400,000	0.	.....	
200,000	+ .0001	0.	

## OBSERVATIONS ON CAST STEEL (EVERETT) TRACK BLOCK, ETC.—

Continued.

[5" gauged length, 2½" from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Movement is an expansion in width.
200,000	0.	.....	
400,000	.0003	.....	
600,000	.0006	.....	
800,000	.0009	.....	
600,000	.0006	.....	
400,000	.0004	.....	
200,000	.0001	.....	
100,000	.0001	0.	

[5" gauged length, 3¼" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0002	.....	Movement is an expansion in width.
400,000	.0006	.....	
600,000	.0010	.....	
800,000	.0014	.....	
600,000	.0011	.....	
400,000	.0007	.....	
200,000	.0004	0.	

[5" gauged length 4¼" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0004	.....	Movement is an expansion in width.
400,000	.0008	.....	
600,000	.0013	.....	
800,000	.0016	.....	
600,000	.0014	.....	
400,000	.0011	.....	
200,000	.0006	0.	

[5" gauged length 5" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0005	.....	Movement is an expansion in width.
400,000	.0010	.....	
600,000	.0016	.....	
800,000	.0021	.....	
600,000	.0019	.....	
400,000	.0015	.....	
200,000	.0009	.....	
100,000	.0005	.....	
50,000	.0003	0.	

## OBSERVATIONS ON THE CAST STEEL ROCKER BLOCK; TRANSVERSE GAUGED LENGTH 5".

[Taken ¼" from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
5,000	0.	0.	Initial load.
200,000	.0005	.....	Movement is a contraction in width.
400,000	.0009	.....	
600,000	.0013	.....	
800,000	.0016	.....	
600,000	.0014	.....	
400,000	.0010	.....	
200,000	.0005	0.	

OBSERVATIONS ON THE CAST STEEL ROCKER BLOCK, ETC.—Continued.

[5" gauged length 3/8" from the working face.]

Applied loads.	Lateral movement.	Set.	Remarks.
Pounds.	Inch.	Inch.	
5,000	0.	0.	Initial load.
200,000	.0001	.....	Movement is a contraction in width.
400,000	.0001	.....	
600,000	.0001	.....	
800,000	.0003	.....	
600,000	.0003	.....	
400,000	.0002	.....	
200,000	.0001	0.	

[5" gauged length 1 1/4" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0001	.....	Movement is an expansion in width.
400,000	.0002	.....	
600,000	.0003	.....	
800,000	.0004	.....	
600,000	.0003	.....	
400,000	.0002	.....	
200,000	.0001	0.	

[5" gauged length 2 1/4" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0002	.....	Movement is an expansion in width.
400,000	.0005	.....	
600,000	.0008	.....	
800,000	.0010	.....	
600,000	.0008	.....	
400,000	.0005	.....	
200,000	.0003	0.	

[5" gauged length 3 1/4" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0004	.....	Movement is an expansion in width.
400,000	.0007	.....	
600,000	.0010	.....	
800,000	.0014	.....	
600,000	.0011	.....	
400,000	.0008	.....	
200,000	.0004	0.	

[5" gauged length 4 1/4" from the working face.]

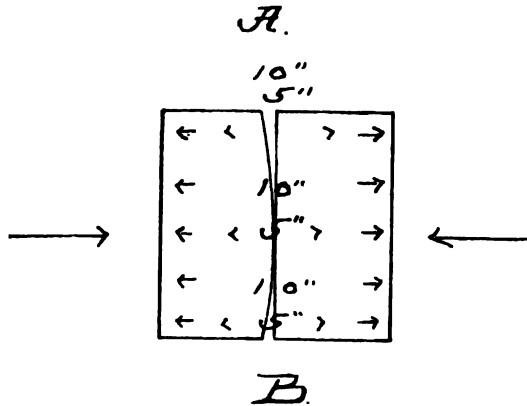
5,000	0.	0.	Initial load.
200,000	.0004	.....	Movement is an expansion in width.
400,000	.0008	.....	
600,000	.0011	.....	
800,000	.0015	.....	
600,000	.0013	.....	
400,000	.0010	.....	
200,000	.0006	0.	

[5" gauged length 5" from the working face.]

5,000	0.	0.	Initial load.
200,000	.0005	.....	Movement is an expansion in width.
400,000	.0011	.....	
600,000	.0016	.....	
800,000	.0019	.....	
600,000	.0017	.....	
400,000	.0013	.....	
200,000	.0007	.....	
100,000	.0004	.....	
50,000	.0002	0. +	

OBSERVATIONS ON THE DIRECT COMPRESSION OF THE BLOCKS RENEWED.

Gauged lengths.



CAST STEEL (EVERETT) TRACK BLOCK, 5" GAUGED LENGTH.

No. 10446f.

[Side A, 1/4" from sides of blocks.]

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i> 5,000	<i>Inch.</i> 0.	<i>Inch.</i> 0.	Initial load.
100,000	.0024	.....	
200,000	.0048	.....	
300,000	.0068	.....	
400,000	.0074	.....	
500,000	.0088	.....	
600,000	.0102	.....	
700,000	.0116	.....	
800,000	.0129	.....	
700,000	.0118	.....	
600,000	.0106	.....	
500,000	.0094	.....	
400,000	.0080	.....	
300,000	.0065	.....	
200,000	.0047	.....	
100,000	.0027	.0001	

[5" gauged length, side B, 1/4" from the sides of the blocks.]

5,000	0.	0.	Initial load.
100,000	.0028	.....	
200,000	.0048	.....	
300,000	.0067	.....	
400,000	.0085	.....	
500,000	.0101	.....	
600,000	.0117	.....	
700,000	.0133	.....	
800,000	.0148	.....	
700,000	.0136	.....	
600,000	.0121	.....	
500,000	.0107	.....	
400,000	.0091	.....	
300,000	.0073	.....	
200,000	.0053	.....	
100,000	.0030	0.	

CAST STEEL (EVERETT) TRACK BLOCK, 5' GAUGED LENGTH—Continued.

[10' gauged length, side A, 1/4" from sides of the blocks.]

Applied loads.	Compression.	Set.	Remarks.
Pounds.	Inch.	Inch.	
5,000	0.	0.	Initial load.
100,000	.0025	.....	
200,000	.0045	.....	
300,000	.0063	.....	
400,000	.0079	.....	
500,000	.0093	.....	
600,000	.0109	.....	
700,000	.0126	.....	
800,000	.0139	0.	

[10' gauged length at middle of width of blocks.]

5,000	0.	0.	Initial load.
100,000	.0011	.....	
200,000	.0021	.....	
300,000	.0031	.....	
400,000	.0041	.....	
500,000	.0051	.....	
600,000	.0060	.....	
700,000	.0069	.....	
800,000	.0079	0.	

[10' gauged length, side B, 1/4" from sides of the blocks.]

5,000	0.	0.	Initial load.
100,000	.0027	.....	
200,000	.0049	.....	
300,000	.0069	.....	
400,000	.0088	.....	
500,000	.0106	.....	
600,000	.0124	.....	
700,000	.0140	.....	
800,000	.0157	0.	

[10' gauged length, 3 1/4" from side A.]

5,000	0.	0.	Initial load.
100,000	.0016	.....	
200,000	.0030	.....	
300,000	.0043	.....	
400,000	.0054	.....	
500,000	.0067	.....	
600,000	.0078	.....	
700,000	.0090	.....	
800,000	.0100	0.	

[10' gauged length, 3 1/4" from side B.]

5,000	0.	0.	Initial load.
100,000	.0017	.....	
200,000	.0034	.....	
300,000	.0048	.....	
400,000	.0063	.....	
500,000	.0075	.....	
600,000	.0087	.....	
700,000	.0100	.....	
800,000	.0114	0.	

Horizontal adjusting screws of testing machine holder moved one turn toward side A.

[Observations repeated on 10" gauged length  $\frac{1}{4}$ " from side A.]

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i> 5,000 400,000 800,000 800,000	<i>Inch.</i> 0. .0065 .0127 .0131	<i>Inch.</i> 0. ..... .0007 .0011	Initial load.

[10" gauged length  $\frac{1}{4}$ " from side B.]

5,000 400,000 800,000	0. .0104 .0181	0. ..... .0001	Initial load.
-----------------------------	----------------------	----------------------	---------------

Adjusting screws moved two turns in the direction B, the blocks now being one turn toward B beyond their original position.

[10" gauged length  $\frac{1}{4}$ " from side A.]

Applied loads.	Compression.	Set.	Remarks.
<i>Pounds.</i> 5,000 400,000 800,000 800,000	<i>Inch.</i> 0. .0140 .0192 .0194	<i>Inch.</i> 0. ..... .0031 .0036	Initial load.

[10" gauged length  $\frac{1}{4}$ " from side B.]

5,000 400,000 800,000	0. .0066 .0125	0. ..... .0004	Initial load.
-----------------------------	----------------------	----------------------	---------------

**TENSILE TESTS—SPECIMENS FROM ROCKER BLOCK AND TRACK BLOCKS.**

No. 7455.

Specimen from cast steel rocker block.  
 Marks, R.  
 Diameter ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1, 000	0.	0.	0.	0.	Initial load.
5, 000	.000133	.000133	0.	0.	
10, 000	.000267	.000134	.....	.....	Elastic limit.
20, 000	.000533	.000266	0.	0.	
30, 000	.001067	.000434	.000033	.000033	
31, 000	.001100	.000383	.....	.....	
32, 000	.001133	.000333	.....	.....	
33, 000	.001200	.000267	.....	.....	
34, 000	.001267	.000267	.....	.....	
35, 000	.001333	.000266	.000133	.000100	
36, 000	.001500	.000167	.....	.....	
37, 000	.001600	.000100	.....	.....	
38, 000	.001800	.000200	.....	.....	
40, 000	.002733	.000283	.....	.....	
42, 000	.004333	.001600	.....	.....	
44, 000	.005900	.001567	.....	.....	
46, 000	.007500	.001600	.....	.....	
48, 000	.009167	.001667	.....	.....	
50, 000	.011000	.001833	.....	.....	
75, 920	.....	.....	.....	.....	Tensile strength.

*General summary.*

Tensile strength per square inch of original section.....	pounds..	75, 920
Elastic limit per square inch of original section.....	do...	32, 000
Elongation per inch after rupture.....	inch...	.058
Elongation per inch under strain at elastic limit.....	do...	.001133
Reduction in diameter at point of rupture.....	do...	.024
Reduction in area after rupture, per cent of original section.....		8.4
Position of rupture.....		1.78 from neck
Character of broken surface.....		granular, silvery luster
Elongation of inch sections.....		".05, ".06, ".05

No. 7456.

Specimen from cast iron track block.

Marks, C I.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
2,000	.000067	.000067	.....	.....	
3,000	.000100	.000083	.....	.....	
4,000	.000133	.000083	.....	.....	
5,000	.000167	.000084	0.	0.	
6,000	.000267	.000100	.....	.....	
7,000	.000300	.000083	.....	.....	
8,000	.000367	.000067	.....	.....	
9,000	.000400	.000083	.....	.....	
10,000	.000467	.000067	0.	0.	
11,000	.000567	.000100	.....	.....	
12,000	.000633	.000066	.....	.....	
13,000	.000667	.000084	.....	.....	
14,000	.000733	.000066	.....	.....	
15,000	.000833	.000100	.000083	.000083	
16,000	.000833	.000100	.....	.....	
17,000	.001000	.000067	.....	.....	
18,000	.001067	.000067	.....	.....	
19,000	.001133	.000066	.....	.....	
20,000	.001233	.000100	.000133	.000100	
21,000	.001333	.000100	.....	.....	
22,000	.001433	.000100	.....	.....	
23,000	.001533	.000100	.....	.....	
24,000	.001633	.000100	.....	.....	
25,000	.001733	.000100	.000300	.000167	
26,000	.001900	.000167	.....	.....	
27,000	.002067	.000167	.....	.....	
28,000	.002233	.000166	.....	.....	
29,000	.002400	.000167	.....	.....	
30,000	.002700	.000300	.000833	.000533	
33,120	.....	.....	.....	.....	Tensile strength.

*General summary.*

Tensile strength per square inch of original section ..... pounds.. 33,120  
 Position of rupture ..... 1".46 from neck  
 Character of broken surface..... granular, gray, granitic



No. 7457.

Specimen from cast steel (Midvale) track block.

Marks, M.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000800	.000200			
20,000	.000667	.000867	0.	0.	
30,000	.001067	.000400	.000067	.000067	
31,000	.001100	.000383			
32,000	.001167	.000067			
33,000	.001233	.000066			
34,000	.001267	.000034			
35,000	.001333	.000066	.000133	.000066	
36,000	.001433	.000100			
38,000	.001567	.000134			
39,000	.001633	.000066			
40,000	.001867	.000234	.000500	.000367	
41,000	.002167	.000300			
42,000	.003067	.000900			
43,000	.003833	.000766			
44,000	.004733	.000900			
46,000	.006333	.001600			
48,000	.008033	.001700			
50,000	.009667	.001534			Tensile strength.
88,400					

General summary.

Tensile strength per square inch of original section	pounds..	88,400
Elastic limit per square inch of original section	do..	34,000
Elongation per inch after rupture	Inch..	.113
Elongation per inch under strain at elastic limit	do..	.001267
Reduction in diameter at point of rupture	do..	.044
Reduction in area after rupture, per cent of original section		15.0
Position of rupture		".85 from neck
Character of broken surface		granular, silvery luster
Elongation of inch sections		".13", ".11", ".10

No. 7458.

Specimen from forged steel-track block.

Marks, F.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000100	.000100	0.	0.	
10,000	.000333	.000233	0.	0.	
20,000	.000700	.000367	0.	0.	
30,000	.001100	.000400	0.	0.	
31,000	.001133	.000333	.....	.....	
32,000	.001200	.000367	.....	.....	
33,000	.001233	.000333	.....	.....	
34,000	.001267	.000334	.....	.....	
35,000	.001300	.000333	.....	.....	
36,000	.001400	.000100	.....	.....	
	.004100	.002700	.....	.....	
37,000	.006333	.002233	.....	.....	
38,000	.007267	.000934	.....	.....	
39,000	.007767	.000500	.....	.....	
40,000	.008600	.000333	.....	.....	
41,000	.009267	.000667	.....	.....	
42,000	.010333	.001066	.....	.....	
43,000	.011000	.000667	.....	.....	
44,000	.012367	.001367	.....	.....	
45,000	.012733	.000366	.....	.....	Tensile strength.
81,520	.....	.....	.....	.....	

*General summary.*

Tensile strength per square inch of original section .....	pounds..	81,520
Elastic limit per square inch of original section .....	do...	35,000
Elongation per inch after rupture .....	inch..	.21
Elongation per inch under strain at elastic limit .....	do...	.001300
Reduction in diameter at point of rupture .....	do...	.114
Reduction in area after rupture, per cent of original section .....		36.4
Position of rupture .....		1".05 from neck
Character of broken surface .....	granular 75 per cent, silky 25 per cent	
Elongation of inch sections .....	" .14, ".21, ".28"	

No. 7459.

Specimen from cast steel (Everett) track block.

Marks, E.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	Elongation per inch.	Successive elongation per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000167	.000167	0.	0.	
10,000	.000333	.000166	0.	0.	
20,000	.000733	.000400	0.	0.	
30,000	.001100	.000867	0.	0.	
31,000	.001133	.000833			
32,000	.001200	.000867			
33,000	.001233	.000833			
34,000	.001267	.000834			
35,000	.001300	.000833			
36,000	.001400	.000100			Elastic limit.
37,000	.002333	.000933			
	.006333	.004000			
38,000	.007400	.001067			
39,000	.007833	.000433			
40,000	.008667	.000834			
41,000	.009333	.000666			
42,000	.010500	.001167			
43,000	.011100	.000600			
44,000	.011900	.000800			
45,000	.013000	.001100			Tensile strength.
81,960					

General summary.

Tensile strength per square inch of original section.....	pounds..	81,960
Elastic limit per square inch of original section.....	do...	35,000
Elongation per inch after rupture.....	inch...	.223
Elongation per inch under strain at elastic limit.....	do....	.001300
Reduction in diameter at point of rupture.....	do....	.104
Reduction in area after rupture, per cent of original section.....		33.5
Position of rupture.....		1".40 from neck
Character of broken surface.....	silky 80 per cent, granular 20 per cent	
Elongation of inch sections.....		".23, ".29*, ".15

TABULATION OF TENSILE SPECIMENS FROM ROCKER BLOCK AND TRACK BLOCKS.

No. of test.	Mark on specimen.	Diam. eter.	Sectional area.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation.	Con- traction of area.	Appearance of frac- ture.	Elongation of inch sections.
		<i>Inch.</i>	<i>Sq. inch.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Per ct.</i>	<i>Per ct.</i>		<i>" " "</i>
7455	R.....	.564	.25	82,000	75,920	5.3	8.4	Granular, silvery luster.	.06, .06*, .06
7456	C. I ...	.564	.25	.....	83,120	.....	.....	Granular, gray, granu- lific.	
7457	M ....	.564	.25	84,000	88,400	11.3	15.0	Granular, silvery luster.	.13*, .11, .10
7458	F.....	.564	.25	85,000	81,520	21.0	36.4	Granular 75 per cent, silky 25 per cent.	.14, .21, .28*
7459	E.....	.564	.25	35,000	81,960	22.3	33.5	Silky 80 per cent, granular 20 per cent.	.23, .29*, .15

**COMPRESSION TESTS.—SPECIMENS FROM ROCKER BLOCK AND TRACK BLOCKS.**

No. 1178.

Specimen from cast steel rocker block.  
 Marks, R.  
 Total length, 5."  
 Diameter, 1".00.  
 Sectional area, .7854 square inch.  
 Gauged length, 4."

Applied loads per square inch.	Compression per inch.	Successive compression per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	0.	0.	Initial load.
5,000	.000250	.000250	.000025	.000025	
10,000	.000475	.000225	.000060	.000025	
11,000	.000500	.000025			
12,000	.000525	.000025			
13,000	.000550	.000025			
14,000	.000600	.000050			
15,000	.000650	.000050	.000050	0.	
16,000	.000675	.000025			
17,000	.000700	.000025			
18,000	.000725	.000025			
19,000	.000750	.000025			
20,000	.000800	.000050	.000100	.000050	
21,000	.000825	.000025			
22,000	.000875	.000050			
23,000	.000900	.000025			
24,000	.000950	.000050			
25,000	.000975	.000025	.000100	0.	
26,000	.001000	.000025			
27,000	.001025	.000025			
28,000	.001075	.000050			
29,000	.001100	.000025			
30,000	.001125	.000025	.000125	.000025	
31,000	.001175	.000050			
32,000	.001225	.000050			
33,000	.001250	.000025			
34,000	.001300	.000050			
35,000	.001350	.000050	.000225	.000100	
36,000	.001400	.000050			
37,000	.001450	.000050			
38,000	.001525	.000075			
39,000	.001650	.000125			
40,000	.001975	.000325	.000750	.000525	
41,000	.003875	.001400			
42,000	.005000	.001625			
43,000	.006750	.000750			
44,000	.006350	.000600			
45,000	.007125	.000775	.005625	.004875	
88,300					Ultimate strength.

Failed by triple flexure.

No. 1177.

Specimen from cast iron track block.  
 Marks, CI.  
 Total length, 6".  
 Diameter, 1".00.  
 Sectional area, .7854 square inch.  
 Gauged length, 4".

Applied loads per square inch.	Compression per inch.	Successive compression per inch.	Permanent set.	Successive permanent set.	Remarks.
Pounds.	Inch.	Inch.	Inch.	Inch.	
1,000	0.	0.	0.	0.	Initial load.
2,000	.000075	.000075			
3,000	.000125	.000050			
4,000	.000150	.000025			
5,000	.000225	.000075	0.	0.	
6,000	.000275	.000050			
7,000	.000325	.000050			
8,000	.000350	.000025			
9,000	.000425	.000075			
10,000	.000475	.000050	0.	0.	
11,000	.000500	.000025			
12,000	.000575	.000075			
13,000	.000625	.000050			
14,000	.000675	.000050			
15,000	.000725	.000050	0.	0.	
16,000	.000775	.000050			
17,000	.000825	.000050			
18,000	.000875	.000050			
19,000	.000925	.000050			
20,000	.000975	.000050	.000025	.000025	
21,000	.001025	.000050			
22,000	.001100	.000075			
23,000	.001175	.000075			
24,000	.001225	.000050			
25,000	.001300	.000075	.000075	.000050	
26,000	.001350	.000050			
27,000	.001425	.000075			
28,000	.001475	.000050			
29,000	.001560	.000075			
30,000	.001625	.000075	.000200	.000125	
31,000	.001700	.000075			
32,000	.001825	.000125			
33,000	.001925	.000100			
34,000	.002000	.000075			
35,000	.002100	.000100	.000450	.000250	
36,000	.002250	.000150			
37,000	.002400	.000150			
38,000	.002500	.000100			
39,000	.002675	.000175			
40,000	.002925	.000250	.000875	.000425	
41,000	.003150	.000225			
42,000	.003350	.000200			
43,000	.003600	.000250			
44,000	.003850	.000250			
45,000	.004250	.000400	.001825	.000950	
46,000	.004575	.000825			
47,000	.004875	.000800			
48,000	.005225	.000850			
49,000	.005600	.000375			
50,000	.006050	.000450	.008450	.001625	
102,100					Ultimate strength.

Failed by triple flexure.

No. 1179.

Specimen from cast steel (Midvale) track block.

Marks, M.

Total length, 5".

Diameter, 1".00.

Sectional area, .7854 square inch.

Gauged length, 4".

Applied loads per square inch.	Compression per inch.	Successive compression per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000100	.000100	.000025	.000025		
10,000	.000275	.000175	.000100	.000075		
11,000	.000350	.000075				
12,000	.000400	.000050				
13,000	.000425	.000025				
14,000	.000475	.000050				
15,000	.000500	.000025	.000100	0.		
16,000	.000500	0.				
17,000	.000500	0.				
18,000	.000600	.000100				
19,000	.000650	.000050				
20,000	.000825	.000175	.000300	.000200		Elastic limit.
21,000	.001050	.000225				
22,000	.001625	.000575				
23,000	.002100	.000475				
24,000	.002750	.000650				
25,000	.003775	.001025	.000325	.002725		
26,000	.004600	.000825				
27,000	.005750	.001150				
28,000	.007050	.001300				
29,000	.008050	.001000				
30,000	.009075	.001025	.000800	.005075	Ultimate strength.	
57,800						

Failed by triple flexure.

No. 1180.

Specimen from forged steel track block.

Marks, F.

Total length, 6".

Diameter, 1".00.

Sectional area, .7854 square inch.

Gauged length, 4".

Applied loads per square inch.	Compression per inch.	Successive compression per inch.	Permanent set.	Successive permanent set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	0.	0.	Initial load.	
5,000	.000075	.000075	0.	0.		
10,000	.000200	.000125	.....	.....		
15,000	.000350	.000150	.....	.....		
20,000	.000500	.000150	0.	0.		
25,000	.000650	.000150	.....	.....		
30,000	.000850	.000200	0.	0.		
35,000	.001150	.000300	.....	.....		Elastic limit.
36,000	.001250	.000100	.....	.....		
37,000	.001400	.000150	.....	.....		
38,000	.002250	.000850	.....	.....		
39,000	.002875	.000625	.....	.....		
40,000	.003625	.000750	.002275	.002275		
41,000	.004150	.000525	.....	.....		
42,000	.004750	.000600	.....	.....		
43,000	.005700	.000950	.....	.....		
44,000	.006500	.000800	.....	.....	Ultimate strength.	
45,000	.007225	.000725	.006650	.003375		
79,300	.....	.....	.....	.....		

Failed by triple flexure.

No. 1181.

Specimen from cast steel (Everett) track block.

Marks, E.

Total length, 6".

Diameter, 1".00.

Sectional area, .7854 square inch.

Gauged length, 4".

Applied loads per square inch.	Compression per inch.	Successive compression per inch.	Permanent set.	Successive permanent set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	0.	0.	
5,000	.000050	.000050	0.	0.	
10,000	.000250	.000250	0.	0.	
11,000	.000275	.000225	.....	.....	
12,000	.000300	.000225	.....	.....	
13,000	.000350	.000050	.....	.....	
14,000	.000375	.000025	.....	.....	
15,000	.000425	.000050	.000025	.000025	
16,000	.000450	.000025	.....	.....	
17,000	.000500	.000050	.....	.....	
18,000	.000525	.000025	.....	.....	
19,000	.000550	.000025	.....	.....	Elastic limit.
20,000	.000650	.000100	.000125	.000100	
21,000	.000925	.000275	.....	.....	
22,000	.001400	.000475	.....	.....	
23,000	.001775	.000375	.....	.....	
24,000	.002750	.000975	.....	.....	
25,000	.003500	.000750	.002725	.002800	
26,000	.004500	.001000	.....	.....	
27,000	.005525	.001025	.....	.....	
28,000	.006700	.001175	.....	.....	
29,000	.007650	.000850	.....	.....	
30,000	.008500	.000850	.007625	.004900	
57,000	.....	.....	.....	.....	Ultimate strength.

Failed by triple flexure.

**TABULATION OF COMPRESSIVE SPECIMENS FROM ROCKER BLOCK AND TRACK BLOCKS.**

No. of test.	Mark on specimen.	Total length.	Diameter.	Sectional area.	Elastic limit per square inch.	Compressive strength per square inch.	Manner of failure.
		<i>Inches.</i>	<i>Inch.</i>	<i>Sq. inch.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
1178	R.....	5	1.00	.7854	37,000	83,300	Triple flexure.
1177	C. I.....	6	1.00	.7854	.....	102,100	Do.
1179	M.....	5	1.00	.7854	19,000	57,800	Do.
1180	F.....	6	1.00	.7854	35,000	79,300	Do.
1181	E.....	6	1.00	.7854	19,000	57,000	Do.

a Appropriate.



---

---

**WROUGHT IRON.**

---

---



TENSILE TESTS OF WROUGHT IRON.  
 FIRST SERIES.  
 Twelve inches between jaws of testing machine.  
 COMMON REFINED IRON.

Shape.	Nominal size. Inch.	Actual dimen- sions. Inch.	Sec- tional area. Sq. inch.	Tensile strength.		Elon- gation in 10 inches Per cent.	Area at fracture.		Con- trac- tion of area. Per cent.	Appearance of frac- ture.	Elongation of inch sections.		
				Total. Pounds	Per square inch. Pounds		Inch. Sq. inch diameter=.	Sq. inch diameter=.			"	"	
Round..	‡ diameter..	.371 diameter.	.108	5,840	54,070	16.6	.29	diameter=.066.	38.9	Fibrous; broke out- side gauged length.	.16, .16, .17, .16, .16, .14, .14, .16, .19, .22	"	"
Do.....	do.....	.376 diameter.	.111	5,800	52,250	21.1	.29	diameter=.066.	40.5	do	.17, .18, .21, .25, .25, .21, .19, .17, .25, .23	"	"
Do.....	do.....	.374 diameter.	.110	5,860	53,280	20.7	.28	diameter=.062.	48.6	Fibrous.....	.15, .18, .17, .18, .21, .18, .19, .22, .33*	"	"
Do.....	‡ diameter..	.507 diameter.	.202	10,410	51,540	15.7	.38	diameter=.113.	44.0	Fibrous; broke out- side gauged length.	.15, .16, .16, .17, .17, .17, .18, .08, .16, .19, .20	"	"
Do.....	do.....	.503 diameter.	.199	10,500	52,760	20.3	.39	diameter=.119.	40.2	Fibrous.....	.16, .16, .18, .18, .19, .19, .38*, .18, .16, .23, .20	"	"
Do.....	do.....	.508 diameter.	.203	10,530	51,870	23.9	.38	diameter=.113.	44.3	do	.21, .19, .20, .19, .23, .25, .23, .44*, .23, .22	"	"
Do.....	‡ diameter..	.683 diameter.	.315	16,100	51,110	21.4	.51	diameter=.204.	35.3	do	.18, .17, .18, .18, .18, .22, .23, .42*, .19, .19	"	"
Do.....	do.....	.684 diameter.	.316	16,210	51,300	20.1	.52	diameter=.212.	33.5	Fibrous; broke out- side gauged length.	.17, .17, .17, .18, .24, .19, .19, .19, .23, .19	"	"
Do.....	do.....	.685 diameter.	.317	16,150	50,950	19.2	.50	diameter=.196.	38.0	Fibrous.....	.16, .16, .16, .18, .19, .19, .18, .24, .36*, .19	"	"
Do.....	‡ diameter..	.758 diameter.	.451	23,750	52,660	22.0	.62	diameter=.302.	33.0	Fibrous; granular spots.	.17, .18, .24, .23, .23, .34, .20, .19, .18, .18	"	"
Do.....	do.....	.759 diameter.	.452	23,900	52,890	23.9	.59	diameter=.273.	39.6	do	.19, .20, .23, .22, .44*, .24, .24, .23, .20, .20	"	"
Do.....	do.....	.759 diameter.	.452	23,990	52,850	26.3	.59	diameter=.273.	39.6	do	.22, .23, .22, .23, .29, .26, .33, .41, .28, .21	"	"

BEST PUDDLED IRON.

Round..	‡ diameter..	.252 diameter.	.0508	2,950	58,650	19.4	.21	diameter=.085	30.4	Fibrous.....	.11, .11, .10, .10, .12, .13, .16, .16, .16, .14, .11	"	"
Do.....	‡ diameter..	.370 diameter.	.1075	5,690	52,280	22.2	.26	diameter=.086	38.0	do	.22, .21, .21, .29, .36*, .21, .24, .19, .18, .17	"	"
Do.....	‡ diameter..	.371 diameter.	.1075	5,770	54,690	15.1	.32	diameter=.086	45.2	do	.18, .16, .16, .16, .16, .18, .11, .15, .19, .19	"	"
Do.....	‡ diameter..	.499 diameter.	.1986	10,550	53,940	22.4	.38	diameter=.113	42.2	do	.19, .18, .19, .24, .24, .24, .21, .21, .19, .19	"	"
Do.....	‡ diameter..	.88 diameter..	.608	30,100	49,510	15.9	.74	diameter=.430	23.3	Fibrous; broke in saw.	.17, .16, .17, .16, .17*, .15, .15, .16, .16, .16, .15	"	"
Do.....	1 diameter..	1.01 diameter.	.801	42,400	52,980	25.0	.83	diameter=.541	32.5	Fibrous.....	.26, .25, .22, .20, .19, .20, .23, .32*, .38*, .25	"	"

TENSILE TESTS OF WROUGHT IRON—Continued.  
BEST PUDDLED IRON—Continued.

Shape.	Nominal size. Inch.	Actual dimensions. Inch.	Sectional area. Sq. inch.	Tensile strength.		Elongation in 10 inches. Per cent.	Area at fracture. Inch. Sq. inch.	Contraction of area. Per cent.	Appearance of fracture.	Elongation of inch sections.	
				Total. Pounds	Per square inch. Pounds					"	"
Square	1 square	.259 x .261	.0676	8,390	10.7	24 x .24 = .058	Fibrous	10, .09	.08, .10, .12, .20*	.09, .08, .10, .11	
Do	1 square	.368 x .394	.1529	50,000	20.0	32 x .31 = .099	do	18, .18, .18, .18, .19, .21, .24, .27	.18, .18, .18, .18, .19, .21, .24, .27		
Do	1 square	.439 x .441	.1938	10,170	22.2	37 x .36 = .133	do	19, .18, .18, .20, .40*	.21, .23, .22, .22, .19		
Do	1 square	.63 x .63	.397	18,900	15.8	.56 x .56 = .308	Fibrous; broke at jaw.	15, .17, .17, .16, .16, .15, .16, .16, .16	.15, .16, .15, .16, .15, .16, .16		
Do	1 square	.76 x .76	.578	27,960	24.4	.60 x .60 = .360	Fibrous	22, .22, .22, .21, .20, .20, .24, .52*	.22, .21, .20, .20, .24, .52*, .22, .19		
Do	1 square	.87 x .87	.757	35,900	26.4	.69 x .69 = .476	Fibrous; oblique	23, .26, .56*, .28, .21, .25, .24, .22, .20, .20	.23, .26, .56*, .28, .21, .25, .24, .22, .20, .20		
Do	1 square	1.01 x 1.00	1.010	50,200	22.3	.86 x .86 = .740	do	20, .20, .30, .37*	.20, .18, .20, .20, .18, .20		
Do	1 square	1.11 x 1.13	1.254	60,700	25.8	.91 x .91 = .828	Fibrous; broke at jaw.	.24, .23, .24, .24, .23, .23, .24, .26, .31, .36	.24, .23, .24, .24, .23, .23, .24, .26, .31, .36		
Do	1 square	1.26 x 1.25	1.575	74,900	12.0	1.13 x 1.13 = 1.277	Fibrous; granular spots.	10, .10, .10, .10, .30, .10, .10, .10, .10, .10	.10, .10, .10, .10, .30, .10, .10, .10, .10, .10		
Do	1 square	1.37 x 1.39	1.904	92,800	21.8	1.18 x 1.18 = 1.392	Fibrous; two large granular spots.	20, .20, .20, .20, .28, .38*	.21, .19, .18, .17		
Flat	1 1/4 x 1	1.50 x .284	.386	20,000	23.4	1.51 x .22 = .283	Fibrous	19, .22, .22, .20, .23, .41*	.24, .21, .21, .21, .21		
Do	do	1.60 x .284	.396	19,700	19.7	1.31 x .23 = .301	do	14, .16, .16, .22, .18, .19, .19, .21, .21, .31*	.14, .16, .16, .22, .18, .19, .19, .21, .21, .31*		
Do	do	1.60 x .284	.396	19,900	24.5	1.36 x .22 = .299	do	19, .19, .20, .19, .23, .25, .37*	.24, .21, .21, .21		
Do	2 x 1	2.00 x .287	.584	24,200	17.4	1.81 x .31 = .380	do	15, .15, .15, .15, .16, .15, .15, .21, .32*	.15, .15, .15, .15, .16, .15, .15, .21, .32*		
Do	do	2.00 x .287	.584	24,700	16.8	1.78 x .31 = .409	Fibrous; defective spot.	16, .17, .17, .17, .19, .17, .17, .17, .20, .31*	.16, .17, .17, .17, .19, .17, .17, .17, .20, .31*		
Do	do	2.00 x .283	.526	21,500	7.6	1.69 x .22 = .416	do	.06, .06, .06, .06, .06, .06, .07, .22*, .06	.06, .06, .06, .06, .06, .06, .07, .22*, .06		
Do	2 1/4 x 1	2.63 x .256	.648	33,300	16.5	2.87 x .23 = .545	Fibrous	16, .15, .15, .15, .16, .16, .15, .16, .17, .24*	.16, .15, .15, .15, .16, .16, .15, .16, .17, .24*		
Do	do	2.63 x .258	.658	32,800	14.7	2.40 x .22 = .528	do	14, .13, .14, .14, .14, .15, .13, .21*	.14, .14, .14, .14, .15, .13, .21*, .17, .12		
Do	do	2.63 x .258	.653	33,000	14.3	2.38 x .22 = .524	do	15, .14, .14, .14, .14, .14, .13, .14, .15, .14	.15, .14, .14, .14, .14, .14, .13, .14, .15, .14		
Do	1 x 1	1.04 x .504	.524	23,100	20.3	.89 x .41 = .365	do	19, .18, .21, .22, .40*	.20, .17, .16, .15, .15		
Do	do	1.04 x .504	.524	22,800	23.3	.84 x .36 = .302	do	23, .53*, .25, .19, .22, .17, .19, .20, .18, .17	.23, .53*, .25, .19, .22, .17, .19, .20, .18, .17		
Do	do	1.04 x .504	.524	23,100	29.7	.78 x .38 = .296	do	22, .24, .24, .31, .33, .56*	.29, .24, .27, .24		
Do	1 1/4 x 1	1.65 x .505	.783	34,300	26.8	1.26 x .37 = .466	Fibrous; small granular spots.	20, .22, .21, .23, .22, .21, .23, .26, .37, .53*	.20, .22, .21, .23, .22, .21, .23, .26, .37, .53*		
Do	do	1.65 x .508	.784	34,400	19.4	1.36 x .39 = .530	do	19, .18, .19, .17, .20, .20, .20, .21, .20	.19, .18, .19, .17, .20, .20, .20, .21, .20		
Do	do	1.65 x .506	.784	34,600	26.8	1.34 x .43 = .476	do	.37, .30, .25, .26, .24, .22, .23, .22, .40*	.37, .30, .25, .26, .24, .22, .23, .22, .40*		

Do	2x4	2.04x.507	1.084	45,980	44,470	30.4	1.58x.39=.616	40.4	do	22, 22, 26, 27, 31, 41*, 52*, 30, 31, 22
Do	do	2.03x.499	1.013	46,060	45,470	27.5	1.08x.39=.616	39.2	Fibrous; small granular spots.	18, 19, 18, 21, 24, 26, 26, 29, 36, 61*
Do	do	2.03x.500	1.015	46,050	45,370	30.7	1.60x.38=.608	40.1	do	21, 22, 25, 29, 33, 30, 28, 59*, 39, 27
Do	2 1/4 x 4	2.50x.504	1.260	59,730	47,400	12.4	2.36x.48=1.138	10.1	Fibrous	11, 10, 10, 11, 11, 12, 14, 29*, 12, 10
Do	do	2.50x.501	1.263	59,000	47,080	11.0	2.35x.48=1.090	13.8	do	10, 08, 11, 09, 10, 09, 10, 11, 24*, 08
Do	do	2.50x.505	1.263	59,750	47,310	11.4	2.32x.46=1.067	13.5	Fibrous; broke in jaw.	12, 12, 11, 12, 11, 12, 10, 12, 11, 11
Do	1x4	1.08x.749	.771	37,690	48,890	25.7	.84x.62=.521	32.4	Fibrous	20, 30, 25, 38*, 39*, 23, 24, 24, 24, 23, 20
Do	do	1.02x.751	.748	37,550	49,020	24.7	.86x.62=.527	31.2	do	21, 18, 21, 28, 33*, 28, 30, 27, 23, 21
Do	do	1.08x.749	.771	37,770	48,990	25.5	.86x.62=.527	31.6	do	20, 20, 18, 20, 22, 25, 26, 24, 34, 46*
Do	1 1/4 x 4	1.50x.752	1.128	54,240	48,090	17.8	1.95x.69=.982	17.4	do	16, 16, 17, 31*, 16, 15, 16, 15, 15, 16
Do	do	1.50x.756	1.134	58,620	47,280	17.9	1.82x.66=.871	23.2	Fibrous; small granular spots.	18, 17, 19, 17, 17, 17, 17, 19*, 21, 17
Do	do	1.50x.760	1.125	54,450	48,400	20.1	1.31x.66=.864	23.2	do	18, 19, 17, 18, 19, 18, 20, 30*, 27, 21
Do	2x4	1.99x.776	1.544	77,100	49,980	22.7	1.74x.64=1.114	27.8	do	23, 20, 21, 30, 35*, 26*, 20, 21, 19, 20
Do	do	2.00x.774	1.548	73,100	47,220	12.3	1.83x.66=1.233	18.4	do	10, 09, 11, 12, 16, 26*, 10, 10, 10, 09
Do	do	2.00x.774	1.548	70,700	45,670	8.2	1.84x.71=1.308	15.6	do	08, 08, 07, 07, 09, 06, 07, 08, 07, 13*
Do	2 1/4 x 4	2.60x.746	1.989	93,200	48,070	21.9	2.84x.60=1.404	27.6	do	22, 21, 20, 20, 22, 23, 21, 32*, 19, 19
Do	do	2.59x.755	1.965	91,600	46,850	27.5	2.19x.60=1.314	32.8	do	22, 24, 25, 28, 49*, 36*, 26, 24, 23, 25
Do	do	2.58x.752	1.940	89,900	46,340	22.7	2.23x.63=1.405	27.6	do	18, 18, 19, 20, 20, 22, 22, 22, 24, 31, 33*

BURDEN'S BEST IRON.

Round	1/4 diameter.	.384 diameter.	.116	5,860	50,520	18.6	.28 diameter=.062	46.5	Fibrous; small granular spots.	15, 08, 06, 16, 17, 18, 20, 25, 41*, 23
Do	do	.385 diameter.	.116	5,710	49,220	18.2	.29 diameter=.066	43.1	do	14, 15, 17, 14, 17, 16, 17, 22, 33*, 17
Do	do	.386 diameter.	.116	6,800	50,000	24.0	.28 diameter=.049	37.8	do	18, 17, 19, 21, 26, 26, 22, 41, 27, 25
Do	1/2 diameter.	.506 diameter.	.201	9,340	46,470	28.2	.34 diameter=.091	54.7	do	22, 21, 23, 24, 28, 28, 53*, 27, 33, 23
Do	do	.507 diameter.	.202	9,800	45,040	27.1	.38 diameter=.066	57.4	do	23, 24, 21, 26, 25, 24, 25, 52*, 20, 22
Do	do	.508 diameter.	.199	9,400	47,240	27.6	.34 diameter=.091	54.3	do	21, 22, 28, 26, 28, 27, 55*, 28, 26, 22
Do	3/4 diameter.	.631 diameter.	.318	14,600	46,650	29.9	.38 diameter=.113	63.9	do	22, 22, 25, 59, 34, 24, 31, 29, 29, 23
Do	do	.628 diameter.	.310	14,590	47,070	30.1	.38 diameter=.113	63.6	do	24, 27, 27, 62, 31, 23, 19, 26, 31, 24
Do	do	.630 diameter.	.312	14,130	46,570	27.9	.39 diameter=.119	61.9	do	22, 23, 23, 26, 60*, 27, 28, 26, 21, 24
Flat	1x4	1.04x.246	.256	12,980	50,700	25.6	.80x.17=1.389	45.7	Fibrous	23, 23, 27, 23, 23, 21, 22, 25, 25, 44*
Do	do	1.04x.245	.255	13,100	51,370	26.9	.84x.17=1.448	43.9	Fibrous; oblique.	25, 24, 28, 27, 25, 24, 24, 21, 21, 43*
Do	do	1.05x.246	.257	13,150	51,170	23.9	.83x.17=1.411	45.1	Fibrous	26, 47*, 25, 22, 19, 20, 20, 20, 20, 20
Do	1 1/4 x 4	1.53x.252	.386	17,360	44,970	28.0	1.80x.19=.247	36.0	Fibrous; oblique	23, 23, 28, 32, 27, 25, 27, 45*, 29, 21
Do	do	1.54x.254	.391	17,130	43,810	24.5	1.30x.19=.247	36.8	do	23, 43*, 21, 20, 21, 25, 27, 22, 21, 22
Do	do	1.53x.253	.387	17,280	44,650	25.9	1.25x.20=.250	35.4	Fibrous	22, 23, 28, 25, 25, 47*, 31, 22, 22, 22, 21

TENSILE TESTS OF WROUGHT IRON—Continued.

BURDEN'S BEST IRON—Continued.

Shape.	Nominal size.	Actual dimensions.		Sec-tional area.	Tensile strength.			Elongation in 10 inches.	Area at fracture.	Con-traction of area.	Appearance of frac-ture.	Elongation of inch sections.											
		Total.	Per square inch.		Mean.	Per sq. inch.	Sq. inch.					Per cent.	"	"	"	"	"	"	"	"	"	"	"
Round.	2×1.	2.04×.241	Pounds	Pounds	Per cent.	Inch.	Sq. inch.	Per cent.	Inch.	Per cent.	Fibrous.	17	16	19	18	19	16	16	17	17	20*		
Do.	do.	2.05×.240	492	46,750	17.5	1.78×.20=356	27.6	27.6	1.82×.20=364	26.0	do	18	18	17	17	18	18	16	18	16	16		
Do.	do.	2.04×.239	488	47,080	21.6	1.81×.19=344	29.5	29.5	1.81×.19=344	29.5	Fibrous; broke in jaw.	26	30	24	24	21	20	18	18	18	18	16	
Do.	2½×1.	2.48×.241	588	26,760	25.5	2.05×.19=390	34.8	34.8	2.05×.19=390	34.8	Fibrous.	22	19	19	25	29	35	42*	27	20	20	17	
Do.	do.	2.47×.244	603	27,400	26.0	2.13×.20=426	29.4	29.4	2.13×.20=426	29.4	do	27	37*	32	24	21	20	21	21	22	25	25	
Do.	do.	2.47×.243	600	27,400	24.6	2.12×.19=408	32.8	32.8	2.12×.19=408	32.8	do	22	21	20	28	28	21	30	40*	28	28	28	
Do.	1×1.	1.08×.504	519	23,080	29.1	.78×.37=289	44.4	44.4	.78×.37=289	44.4	do	27	26	31	28	58*	34	25	26	22	19	19	
Do.	do.	1.08×.503	518	23,210	31.6	.80×.38=304	41.3	41.3	.80×.38=304	41.3	do	26	26	31	29	27	40	50*	32	30	28	28	
Do.	do.	1.08×.501	516	23,100	27.0	.84×.39=328	36.4	36.4	.84×.39=328	36.4	do	28	28	24	28	45*	27	26	25	25	24	24	
Do.	1½×1.	1.54×.508	775	35,780	29.2	1.19×.36=428	44.8	44.8	1.19×.36=428	44.8	Fibrous; granular spalls.	23	22	25	25	31	58*	35	26	25	25	22	
Do.	do.	1.53×.502	768	35,800	31.6	1.13×.35=396	46.4	46.4	1.13×.35=396	46.4	do	24	26	25	24	26	27	35	65*	38	26	26	
Do.	do.	1.53×.501	767	37,290	32.1	1.16×.36=418	45.5	45.5	1.16×.36=418	45.5	do	25	26	26	28	28	28	30	44	58*	30	30	
Do.	2×1.	2.00×.499	986	45,610	31.5	1.64×.39=640	35.9	35.9	1.64×.39=640	35.9	do	26	25	24	26	28	38	42	52*	32	27	27	
Do.	do.	2.00×.500	1,000	45,690	31.4	1.61×.38=612	39.8	39.8	1.61×.38=612	39.8	do	31	28	34	34	34	25	25	24	24	26	22	22
Do.	do.	2.00×.501	1,002	45,680	24.8	1.68×.38=638	36.8	36.8	1.68×.38=638	36.8	do	22	21	22	23	24	25	24	25	24	26	26	35
Do.	2½×1.	2.49×.508	1,265	57,440	32.8	2.00×.37=740	41.5	41.5	2.00×.37=740	41.5	do	25	27	30	30	31	27	46	58*	28	26	26	
Do.	do.	2.49×.507	1,262	56,880	28.4	2.00×.38=760	39.8	39.8	2.00×.38=760	39.8	do	20	31	28	24	26	26	30	52*	36	27	27	
Do.	do.	2.49×.507	1,262	57,080	31.2	1.94×.36=698	44.7	44.7	1.94×.36=698	44.7	Fibrous.	24	26	26	26	27	24	36	65*	34	26	26	
Do.	1×1.	1.01×.760	768	35,770	32.0	.76×.54=410	46.6	46.6	.76×.54=410	46.6	do	26	28	30	26	52	42*	29	30	30	30	27	
Do.	do.	1.01×.759	777	35,970	29.5	.79×.56=442	43.1	43.1	.79×.56=442	43.1	do	26	24	24	24	36	52*	26	28	28	28	24	
Do.	do.	1.01×.769	767	36,780	30.7	.79×.57=450	41.3	41.3	.79×.57=450	41.3	do	25	26	26	27	29	26	26	27	28	28	24	
Do.	1½×1.	1.49×.759	1,131	54,580	30.9	1.16×.56=658	43.6	43.6	1.16×.56=658	43.6	Fibrous; granular spalls.	28	26	26	25	27	48	50*	27	28	30	30	
Do.	do.	1.49×.759	1,131	54,600	31.5	1.11×.56=577	49.0	49.0	1.11×.56=577	49.0	do	26	29	28	32	32	67*	31	26	29	26	22	
Do.	do.	1.49×.757	1,128	53,800	27.6	1.18×.56=652	44.6	44.6	1.18×.56=652	44.6	do	21	21	22	24	23	26	26	26	26	26	29	59*

Do	2 x 4	2.08 x .751	1.525	72, 180	47, 350	31.2	1.54 x .57 = .865	38.7	Fibrous	86, 556*, 30, 28, 27, 26, 31, 26, 27, 24
Do	do	2.08 x .751	1.525	71, 120	46, 640	28.9	1.52 x .56 = .907	40.5	Fibrous; granular spots.	28, 32, 68*, 34, 26, 24, 21, 22, 19, 20
Do	do	2.08 x .750	1.525	72, 280	47, 460	30.7	1.59 x .54 = .859	43.6	do	24, 25, 26, 27, 28, 34, 60*, 30, 28, 25
Do	2 1/2 x 4	2.56 x .761	1.948	89, 720	46, 060	31.9	2.02 x .56 = 1.181	41.9	do	28, 24, 30, 46, 60*, 30, 29, 29, 24, 24
Do	do	2.56 x .763	1.953	86, 800	45, 720	27.6	2.08 x .56 = 1.137	41.8	do	22, 20, 21, 22, 28, 28, 26, 32, 56
Do	do	2.56 x .763	1.953	86, 190	45, 670	31.1	2.07 x .56 = 1.159	40.6	do	24, 22, 27, 29, 31, 38, 61*, 38, 26, 25

NORWAY IRON.

Round	1 diameter.	1.009 diameter	800	34, 890	42, 990	25.8	60 diameter = .283	64.6	Fibrous	14, 15, 16, 18, 19, 21, 21, 24, 30, 80*
Do	do	1.008 diameter	798	33, 200	41, 600	26.5	60 diameter = .292	63.4	do	17, 16, 17, 17, 16, 18, 21, 30, 76*
Do	do	do	798	33, 700	42, 280	32.2	60 diameter = .283	64.5	do	18, 22, 24, 25, 26, 28, 36, 56*, 58
Flat	1 x 1	1.02 x .252	257	9, 970	38, 790	16.2	71 x .13 = .092	64.2	do	04, 04, 05, 08, 10, 12, 12, 28, 20, 27, 60*
Do	do	1.02 x .246	260	9, 580	38, 120	31.2	70 x .12 = .094	66.4	do	28, 28, 20, 25, 26, 36, 47, 56*, 34
Do	do	1.08 x .254	258	10, 000	39, 580	19.5	70 x .13 = .091	64.0	do	18, 14, 21, 22, 28, 28, 18, 12, 27
Do	1 1/2 x 1	1.50 x .254	381	16, 080	42, 070	33.8	1.04 x .14 = .146	61.7	do	25, 22, 25, 26, 27, 28, 34, 35, 74*, 39
Do	do	1.50 x .252	378	15, 960	42, 280	32.1	1.08 x .15 = .156	59.0	do	26, 24, 26, 23, 27, 26, 36, 70*, 32, 24
Do	do	1.50 x .256	383	15, 860	41, 410	30.7	1.05 x .14 = .147	61.6	do	21, 22, 25, 26, 28, 31, 66*, 37, 28, 24
Do	2 x 1	2.01 x .236	474	20, 890	43, 020	26.5	1.52 x .17 = .258	45.6	do	16, 16, 18, 19, 20, 21, 25, 28, 35, 67*
Do	do	2.02 x .236	477	20, 400	42, 770	30.9	1.53 x .15 = .230	51.8	do	24, 26, 23, 27, 35, 66*, 33, 24, 22, 22
Do	do	2.01 x .234	470	20, 000	42, 550	30.0	1.49 x .16 = .238	49.4	do	17, 19, 22, 24, 27, 29, 37, 67*, 29, 29
Do	2 1/2 x 1	2.52 x .264	655	25, 300	38, 050	8.8	2.36 x .20 = .472	23.0	Fibrous; granular streak.	04, 05, 06, 06, 06, 06, 07, 06, 11, 32*
Do	do	2.52 x .253	638	26, 900	42, 150	18.1	2.31 x .21 = .485	24.0	do	10, 10, 10, 10, 11, 10, 15, 32*, 12, 11
Do	do	2.53 x .265	670	28, 100	41, 940	16.8	2.26 x .20 = .452	32.5	do	14, 12, 12, 12, 14, 12, 13, 13, 26, 41*
Do	1 x 1	1.02 x .500	510	20, 800	40, 780	31.5	.60 x .27 = .162	68.2	Fibrous	26, 26, 23, 23, 24, 27, 30, 45, 66*, 26
Do	do	1.01 x .500	505	20, 570	40, 730	30.8	.63 x .29 = .176	65.1	do	00, 05, 15, 22, 28, 28, 22, 22, 22
Do	do	1.01 x .504	509	21, 110	41, 470	31.7	.60 x .26 = .156	69.4	do	21, 24, 22, 24, 26, 30, 46, 64*, 30, 30
Do	1 1/2 x 1	1.48 x .500	740	32, 480	45, 890	24.8	1.01 x .31 = .313	37.7	do	14, 15, 15, 16, 16, 20, 21, 25, 27, 67*
Do	do	1.49 x .506	752	38, 700	44, 810	29.8	1.02 x .31 = .318	38.0	do	16, 16, 22, 23, 26, 26, 66*, 42, 39, 34
Do	2 x 1	2.02 x .503	1,016	43, 210	42, 580	24.1	1.41 x .30 = .423	38.3	do	20, 20, 22, 24, 24, 28, 24, 25, 28, 31
Do	do	2.02 x .506	1,022	43, 100	42, 170	30.8	1.41 x .27 = .381	62.7	do	14, 19, 22, 21, 26, 25, 28, 32, 31*, 40
Do	do	2.08 x .503	1,021	43, 400	42, 510	34.5	1.05 x .27 = .419	59.1	do	28, 30, 56, 79*, 36, 29, 28, 25, 28, 22
Do	2 1/2 x 1	2.51 x .494	1,240	56, 070	45, 220	22.7	2.06 x .32 = .659	46.9	do	20, 19, 20, 21, 22, 25, 28, 27, 27, 28
Do	do	2.52 x .496	1,247	56, 120	45, 000	21.5	1.99 x .28 = .557	55.3	Fibrous; s m a 11, granular spots.	20, 18, 20, 19, 23, 21, 22, 21, 22, 23
Do	do	2.52 x .501	1,268	54, 400	43, 100	30.2	1.99 x .31 = .586	53.6	do	19, 21, 19, 23, 18, 24, 24, 39, 31*, 34
Do	1 x 1	1.01 x .750	758	31, 600	41, 690	35.8	.67 x .42 = .281	62.9	Fibrous	26, 24, 27, 23, 34, 38*, 36, 29, 27
Do	do	1.02 x .749	764	31, 850	41, 680	34.2	.66 x .44 = .290	62.0	do	21, 27, 23, 34, 38*, 36, 27, 27
Do	do	1.02 x .750	766	31, 290	40, 900	36.3	.61 x .42 = .256	66.5	do	24, 23, 30, 30, 36, 34, 36*, 76*, 34, 23

TENSILE TESTS OF WROUGHT IRON—Continued.

NORWAY IRON—Continued.

Shape.	Nominal size.	Actual dimensions.	Sectional area.	Tensile strength.			Elongation in 10 inches.	Area at fracture.	Contraction of area.	Appearance of fracture.	Elongation of inch sections.
				Total.	Per square inch.	Mean.					
Flat	1½×½	1.52×.735	Sq. inch. 1.117	Pounds 43,400	Pounds 38,850	Per cent. 41.8	Inch. 1.01×.39=384.	Per cent. 64.7			" " " " " " " "
Do.	do	1.51×.735	1.110	43,300	39,010	36.0	1.02×.41=418.	62.3	Fibrous.	26, 30, 32, 36, 41, 38, 49, 89*, 39, 33	" " " " " " " "
Do.	do	1.50×.736	1.104	44,120	39,960	34.0	.99×.45=446.	59.6	do	22, 26, 24, 27, 27, 30, 35, 40, 93*, 39	" " " " " " " "
Do.	2×½	2.00×.753	1.506	68,000	41,890	28.8	1.49×.46=685.	54.5	do	21, 23, 22, 27, 27, 31, 28, 34, 40, 87*	" " " " " " " "
Do.	do	2.00×.752	1.504	67,100	44,610	18.5	1.50×.46=690.	54.1	Fibrous; broke in jaw.	16, 16, 19, 21, 30, 79*, 41, 24, 21, 21	" " " " " " " "
Do.	do	2.01×.752	1.512	62,500	41,340	24.9	1.50×.49=735.	51.4	do	15, 15, 16, 19, 18, 21, 22, 19, 20, 20	" " " " " " " "
Do.	2½×½	2.55×.761	1.941	79,200	40,800	36.5	1.84×.46=846.	56.4	Fibrous	18, 18, 19, 20, 25, 27, 27, 30, 30, 35	" " " " " " " "
Do.	do	2.56×.762	1.952	78,600	40,270	36.1	1.83×.45=824.	57.8	do	23, 26, 26, 27, 30, 28, 92*, 46, 38, 34	" " " " " " " "
Do.	do	2.56×.762	1.943	79,200	40,760	36.5	1.75×.47=823.	57.7	do	21, 21, 26, 28, 28, 30, 49, 92*, 36, 34	" " " " " " " "

BEST PUDDLED IRON.

[Heated to a bright yellow and cooled in air.]

Flat	1½×½	1.50×.259	.889	19,080	49,050	21.1	1.32×.22=290.	25.5	Fibrous.	17, 22, 20, 19, 21, 22, 20, 22, 28, 25	" " " " " " " "
Do.	2½×½	2.53×.266	.645	33,100	51,320	17.6	2.28×.23=523.	18.8	Fibrous; granular streak.	19, 17, 26*, 18, 17, 16, 15, 15, 18, 16	" " " " " " " "
Do.	2½×½	2.50×.497	1.243	61,080	49,100	21.1	2.21×.41=906.	27.1	Fibrous; small granular spots.	19, 17, 18, 18, 18, 21, 22, 20, 24, 27*, 25	" " " " " " " "
Do.	2½×½	2.57×.750	1.928	92,900	48,190	22.1	2.27×.66=1,488.	22.3	Fibrous; granular spots.	23, 22, 22, 22, 36*, 21, 19, 19, 20, 19, 20	" " " " " " " "



[Heated to a bright yellow and quenched in oil.]

Do <sup>a</sup> .. 2x4 ..	2.00x.287 ..	.514 ..	26,680 ..	51,980 ..	17.7 ..	1.78x.22=.382 ..	23.7 ..	Fibrous ..	.14, .15, .17, .18, .18, .18, .20, .18, .19, .20*
Do .. 1x4 ..	1.04x.500 ..	.520 ..	26,400 ..	50,770 ..	22.4 ..	.87x.40=.348 ..	33.1 ..	Fibrous; granular spots; oblique ..	.19, .20, .20, .18, .19, .25, .42, .24, .18, .19
Do .. 2x4 ..	2.08x.497 ..	1.009 ..	54,550 ..	54,080 ..	21.5 ..	1.69x.39=.659 ..	34.7 ..	Fibrous; small granular spots ..	.18, .17, .18, .14, .22, .33, .38*, .18, .18, .19
Do .. 1x4 ..	1.01x.743 ..	.750 ..	43,770 ..	53,380 ..	20.2 ..	.82x.61=.500 ..	33.3 ..	Fibrous; granular ..	.20, .17, .19, .40*, .29, .16, .15, .17, .15, .14
Do .. 1 1/2 x 4 ..	1.49x.786 ..	1.097 ..	56,760 ..	51,740 ..	17.9 ..	1.32x.64=.845 ..	23.0 ..	do ..	.16, .13, .17, .19, .16, .15, .18, .28*, .21, .16
Do .. 2x4 ..	1.99x.768 ..	1.528 ..	78,900 ..	51,640 ..	20.5 ..	1.75x.67=1.173 ..	23.2 ..	do ..	.21, .19, .19, .23, .20, .26*, .20, .19, .19, .19

[Heated to a bright yellow and quenched in water.]

Flat .. 1 1/2 x 4 ..	1.50x.258 ..	.387 ..	20,740 ..	53,590 ..	18.9 ..	1.34x.23=.308 ..	20.4 ..	Fibrous; small granular spots ..	.15, .14, .19, .19, .19, .24, .23*, .20, .17, .16, .16
Do <sup>a</sup> .. 2x4 ..	2.00x.297 ..	.514 ..	26,700 ..	51,950 ..	14.2 ..	1.77x.22=.389 ..	24.3 ..	Fibrous ..	.13, .12, .14, .14, .15, .14, .14, .14, .15, .15, .16
Do .. 2 1/2 x 4 ..	2.53x.255 ..	.645 ..	38,600 ..	59,850 ..	9.6 ..	2.40x.23=.552 ..	14.4 ..	Fibrous; granular streak ..	.08, .12, .11, .08, .11, .11, .10, .07, .10, .08
Do .. 1x4 ..	1.08x.499 ..	.514 ..	25,910 ..	50,410 ..	19.4 ..	.64x.39=.328 ..	36.2 ..	Fibrous; granular spots ..	.07, .09, .13, .23, .45*, .19, .10, .15, .19, .19
Do .. 1 1/2 x 4 ..	1.55x.499 ..	.778 ..	41,400 ..	38,560 ..	18.2 ..	1.26x.38=.479 ..	38.1 ..	Fibrous ..	.12, .13, .14, .15, .30, .45*, .14, .14, .12, .13
Do .. do ..	1.55x.499 ..	.778 ..	36,600 ..	46,050 ..	11.1 ..	1.51x.48=.649 ..	16.0 ..	Fibrous; cinder spot at edge ..	.12, .29*, .08, .10, .10, .09, .09, .08, .08, .08
Do .. 2x4 ..	2.08x.494 ..	1.008 ..	56,280 ..	56,120 ..	16.0 ..	1.69x.42=.710 ..	29.2 ..	Fibrous; small granular spots ..	.18, .14, .15, .15, .14, .16, .17, .18, .19, .18
Do .. 2 1/2 x 4 ..	2.50x.500 ..	1.260 ..	68,400 ..	50,720 ..	12.6 ..	2.31x.44=1.016 ..	18.7 ..	do ..	.11, .10, .11, .11, .11, .10, .15, .28*, .18, .11
Do .. 1x4 ..	1.01x.740 ..	.747 ..	47,800 ..	63,320 ..	16.4 ..	.87x.64=.557 ..	25.5 ..	do ..	.18, .11, .18, .15, .16, .15, .15, .14, .19, .33*
Do .. 1 1/2 x 4 ..	1.49x.744 ..	1.109 ..	56,200 ..	49,780 ..	11.7 ..	1.67x.64=.877 ..	20.9 ..	Fibrous; granular center ..	.08, .09, .10, .12, .11, .12, .13, .18, .14, .15
Do .. 2x4 ..	1.99x.766 ..	1.524 ..	79,900 ..	52,490 ..	11.2 ..	1.88x.69=1.297 ..	14.9 ..	Fibrous; granular spots ..	.10, .10, .10, .10, .09, .10, .11, .12, .10, .20*
Do .. 2 1/2 x 4 ..	2.57x.747 ..	1.920 ..	Above 99,000 ..	Above 51,560 ..	27.6 ..	2.17x.59=1.280 ..	27.4 ..	Above the capacity of the 100,000 pounds testing machine. Bar annealed, and again tested, as follows:	
Do .. do ..	2.47x.714 ..	1.764 ..	86,800 ..	48,470 ..	27.6 ..			Fibrous; granular spots ..	.27, .22, .22, .25, .24, .25, .26, .23, .28, .28, .54*

<sup>a</sup> These specimens reached a scintillating heat.



NORWAY IRON.

[Heated to a bright yellow and cooled in air.]

Flat....	2 x 4	2.02 x .496	1.002	42,000	41,920	36.5	1.89 x .31 = .451	57.0	Fibrous.....	26, 84, 88, 90, 92, 96, 94*, 37, 27, 26
Do....	2 1/4 x 4	2.62 x .496	1.242	54,000	48,460	18.0	2.00 x .31 = .630	49.9	.....do	17, 17, 16, 16, 16, 16, 14, 16, 12, 27, 26
Do....	1 x 4	1.09 x .741	.756	21,600	41,840	33.2	.68 x .45 = .284	62.4	.....do	21, 22, 24, 38, 80, 41, 79*, 84, 27, 28
Do....	1 1/4 x 4	1.62 x .732	1.113	44,800	40,810	30.8	.99 x .41 = .363	57.2	.....do	27, 27, 20, 32, 38, 36, 37, 38, 34, 34
Do....	2 x 4	2.16 x .745	1.138	62,600	41,860	32.1	1.39 x .56 = .770	47.6	.....do	22, 19, 21, 23, 24, 26, 27, 38, 85*, 36
Do....	2 1/4 x 4	2.56 x .750	1.368	79,400	41,880	32.1	1.84 x .56 = .976	49.6	.....do	22, 19, 21, 23, 24, 26, 27, 38, 85*, 36

[Heated to a bright yellow, and quenched in oil.]

Round..	1 diameter..	1.003 diameter	.790	38,400	46,610	21.0	.60 diameter = .283	64.2	Fibrous.....	.07, 17, 12, 16, 31, 66*, 19, 16, 13, 15
Flat....	1 x 4	1.01 x .495	.600	21,600	48,200	26.3	.68 x .27 = .184	63.2	Fibrous; broke in jaw.	27, 28, 29, 26, 26, 24, 22, 26, 27, 18
Do....	2 x 4	2.01 x .499	1.008	46,800	46,840	28.6	1.54 x .31 = .477	62.4	Fibrous.....	23, 22, 26, 31, 87*, 21, 26, 22, 20, 20
Do....	2 1/4 x 4	2.62 x .495	1.222	51,800	41,960	8.6	2.26 x .40 = .904	26.0	Fibrous; large granular spots.	.07, .07, .07, .07, .06, 12, 10, 10, 10, .09, .08
Do....	1 x 4	1.02 x .745	.760	34,700	45,740	18.7	.68 x .46 = .290	61.8	Fibrous.....	16, 17, 19, 17, 19, 18, 18, 19, 21, 23
Do....	1 1/4 x 4	1.51 x .731	1.104	47,640	43,160	34.7	1.01 x .46 = .465	57.6	.....do	22, 24, 26, 28, 38, 41, 84*, 38
Do....	2 x 4	2.01 x .749	1.606	71,200	47,810	21.0	1.58 x .52 = .806	46.4	.....do	18, 18, 21, 27, 31, 22, 20, 18, 17, 18
Do....	2 1/4 x 4	2.54 x .764	1.864	84,700	45,440	23.2	1.72 x .46 = .636	55.7	.....do	19, 16, 16, 19, 16, 19, 22, 31, 64*, 61*

[Heated to a bright yellow and quenched in water.]

Round..	1 diameter..	1.002 diameter	.789	36,800	46,640	27.4	.56 diameter = .246	68.8	Fibrous.....	16, 14, 16, 17, 22, 24, 27, 48*, 67, 24
Flat....	1 x 4	1.02 x .497	.607	28,000	45,860	20.4	.71 x .27 = .192	62.1	Fibrous; broke in jaw.	19, 16, 26, 22, 17, 22, 20, 20, 22, 21
Do....	2 x 4	2.02 x .498	1.006	46,400	48,110	16.4	1.46 x .30 = .438	56.3	.....do	16, 17, 17, 16, 18, 16, 16, 14, 15
Do....	2 1/4 x 4	2.50 x .490	1.225	54,400	44,410	8.0	2.80 x .40 = .920	24.9	Fibrous; large granular spots.	.04, .04, .06, .08, .06, .06, 18, 28*, .06
Do....	1 x 4	1.01 x .745	.762	37,710	50,160	15.0	.65 x .47 = .306	59.3	Fibrous; granular spot.	14, 14, 16, 16, 15, 16, 16, 18, 11, 15
Do....	1 1/4 x 4	1.50 x .725	1.068	46,700	44,760	21.4	.97 x .44 = .427	60.9	Fibrous.....	20, 21, 21, 22, 21, 19, 19, 20, 28, 28
Do....	2 x 4	1.99 x .748	1.469	72,400	45,620	9.9	1.88 x .47 = .688	56.1	.....do	14, 18, 14, 18, 20, 28, 27, 36, 88, 21
Do....	2 1/4 x 4	2.54 x .768	1.913	89,600	46,790	15.3	1.87 x .64 = 1.010	47.2	.....do	16, 18, 18, 14, .09, 16, 16, 17, 19, 20

c Snapping sounds heard above 45,000 pounds. A granular streak of metal in the bar broke before the rest.

## SECOND SERIES.

## STRENGTH AND ELONGATION OF WROUGHT IRON BARS AFTER TREATMENT BY HEATING TO A FULL YELLOW HEAT AND COOLING IN AIR, WATER, AND OIL.

Finished bars were treated and threaded ends subsequently cleaned in the lathe; stems of specimens not redressed.

Specimens of this series were turned down from 1¼" rolled rods.

No. 7474.

Common Refined Iron.

Heated full yellow and cooled in air.

Diameter, ".794.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0021	0.	
15,000	.0031	0.	
20,000	.0043	0.	
25,000	.0055	.0001	
30,000	.0069	.0003	
31,000	.0072	.....	
32,000	.0076	.....	
33,000	.0079	.....	
34,000	.0082	.....	Elastic limit.
32,000	.0233	.....	
33,000	.0380	.....	
34,000	.1015	.....	
35,000	.1100	.....	
36,000	.1320	.....	
37,000	.1465	.....	
38,000	.1650	.....	
40,000	.22	.....	
42,000	.27	.....	
44,000	.34	.....	
46,000	.43	.....	
48,000	.58	.....	
50,000	.69	.....	
52,000	1.07	.....	Tensile strength. =26.3 per cent.
52,440	1.36	.....	
0	1.58	.....	

Elongation of inch sections, ".19, ".21, ".23, ".49\*, ".25, ".21.

Diameter at fracture, ".59; area, .2734 square inch.

Contraction of area, 45.3 per cent.

Appearance of fracture, fibrous.

No. 7475.

Common Refined Iron.  
 Heated full yellow and quenched in oil.  
 Diameter, ".795.  
 Sectional area, .50 square inch.  
 Length of stem, 7".  
 Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0009	0.		
10,000	.0020	0.		
15,000	.0031	0.		
20,000	.0041	0.		
25,000	.0054	.0001		
30,000	.0071	.0009		Elastic limit.
31,000	.0078	.....		
32,000	.0084	.....		
33,000	.0092	.....		
34,000	.0108	.....		
35,000	.0130	.0059		
36,000	.0180	.....		
37,000	.0260	.....		
38,000	.0360	.....		
39,000	.0725	.....		
40,000	.0860	.0763	Tensile strength. =15.2 per cent.	
41,000	.0970	.....		
42,000	.1185	.....		
43,000	.1420	.....		
44,000	.1610	.....		
46,000	.20	.....		
48,000	.27	.....		
50,000	.34	.....		
52,000	.42	.....		
54,000	.53	.....		
56,000	.74	.....		
56,400	.....	.....		
0	.91	.....		

Elongation of inch sections, ".12, ".09, ".12, ".12, ".15, ".31\*.  
 Diameter at fracture, ".67; area, .3526 square inch.  
 Contraction of area, 29.5 per cent.  
 Appearance of fracture, fibrous.

H. Doc. 335—12

No. 7476.

Common Refined Iron.

Heated full yellow and quenched in water.

Diameter, ".796.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0011	0.	
10,000	.0023	.0001	
15,000	.0039	.0002	
20,000	.0052	.0008	
25,000	.0073	.0015	
26,000	.0078	.....	
27,000	.0082	.....	
28,000	.0088	.....	
29,000	.0093	.....	
30,000	.0101	.0032	
31,000	.0109	.....	
32,000	.0118	.....	
33,000	.0126	.....	
34,000	.0143	.....	
35,000	.0164	.0086	
36,000	.0197	.....	
38,000	.0340	.....	
40,000	.0510	.0413	
42,000	.0680	.....	
44,000	.1010	.....	
46,000	.1360	.....	
48,000	.1770	.....	
50,000	.23	.....	
52,000	.29	.....	
54,000	.36	.....	
56,000	.46	.....	
58,000	.60	.....	
60,000	.83	.....	
60,400	1.00	.....	Tensile strength. =16.7 per cent.

Elastic limit indefinite.

Elongation of inch sections, ".32\*", ".13, ".13, ".13, ".14, ".15.

Diameter at fracture, ".60; area, .2827 square inch.

Contraction of area, 43.5 per cent.

Appearance of fracture, fibrous.

No. 7477.

Best Puddled Iron.  
 Heated full yellow and cooled in air.  
 Diameter, ".795.  
 Sectional area, .50 square inch.  
 Length of stem, 7".  
 Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0011	.0001	
10,000	.0024	.0001	
15,000	.0037	.0002	
20,000	.0049	.0002	
25,000	.0060	.0003	
30,000	.0073	.0009	
31,000	.0080	.....	Elastic limit.
32,000	.0340	.....	
31,000	.0660	.....	
32,000	.0700	.....	
33,000	.0850	.....	
34,000	.1000	.....	
35,000	.1180	.1065	
36,000	.1320	.....	
37,000	.1580	.....	
38,000	.1770	.....	
40,000	.24	.....	
42,000	.29	.....	
44,000	.37	.....	
46,000	.46	.....	
48,000	.58	.....	
50,000	.77	.....	
51,600	.....	.....	Tensile strength.
0	1.51	.....	= 25.2 per cent.

Elongation of inch sections, ".19, ".19, ".22, ".38\*, ".29, ".24.  
 Diameter at fracture, ".64; area, .3217 square inch.  
 Contraction of area, 35.7 per cent.  
 Appearance of fracture, fibrous.

No. 7478.

Best Puddled Iron.

Heated full yellow and quenched in oil.

Diameter, ".797.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0009	0.	
10,000	.0019	0.	
15,000	.0080	0.	
20,000	.0041	0.	
25,000	.0054	.0001	
28,000	.0069	.....	
29,000	.0074	.....	Elastic limit.
30,000	.0090	.0024	
31,000	.0100	.....	
32,000	.0120	.....	
33,000	.0160	.....	
34,000	.0230	.....	
35,000	.0400	.0820	
36,000	.0620	.....	
38,000	.0880	.....	
40,000	.1190	.1094	
42,000	.1500	.....	
44,000	.21	.....	
46,000	.28	.....	
48,000	.34	.....	
50,000	.43	.....	
52,000	.55	.....	
54,000	.74	.....	
55,760	.....	.....	Tensile strength.
0	1.44	.....	=24 per cent.

Elongation of inch sections, ".20, ".22, ".21, ".27, ".33\*, ".21.

Diameter at fracture, ".64; area, .3217 square inch.

Contraction of area, 35.7 per cent.

Appearance of fracture, fibrous.



No. 7479.

Best Puddled Iron.

Heated full yellow and quenched in water.

Diameter, ".797.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0009	0.	
10,000	.0020	0.	
15,000	.0034	.0004	
16,000	.0038	.....	
17,000	.0041	.....	
18,000	.0043	.....	
19,000	.0048	.....	
20,000	.0051	.0010	
21,000	.0057	.....	
22,000	.0060	.....	
23,000	.0064	.....	
24,000	.0069	.....	
25,000	.0077	.0022	
26,000	.0081	.....	
27,000	.0087	.....	
28,000	.0088	.....	
29,000	.0102	.....	
30,000	.0112	.0050	
32,000	.0142	.....	
34,000	.0198	.....	
36,000	.0300	.....	
38,000	.0530	.....	
40,000	.0780	.0685	
42,000	.1015	.....	
44,000	.1400	.....	
46,000	.17	.....	
48,000	.24	.....	
50,000	.30	.....	
52,000	.38	.....	
54,000	.48	.....	
56,000	.65	.....	
57,120	.82	.....	
0	.86	.....	
			Tensile strength. = 14.2 per cent.

Elastic limit indefinite.

Elongation of inch sections, ".19, ".13, ".15, ".14, ".12, ".12.

Diameter at fracture, ".67; area, .3526 square inch.

Contraction of area, 29.5 per cent.

Appearance of fracture, fibrous, trace of granulation. Fractured outside the 6-inch gauged length.

No. 7480.

Burden's Best Iron.  
 Heated full yellow and cooled in air.  
 Diameter, ".797.  
 Sectional area, .50 square inch.  
 Length of stem, 7".  
 Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0010	0.	
10,000	.0020	0.	
15,000	.0081	0.	
20,000	.0042	0.	
25,000	.0063	0.	
30,000	.0063	0.	
34,000	.0071	.....	
35,000	.0078	.....	Elastic limit.
31,000	.0180	.....	
30,000	.0280	.....	
31,000	.0850	.....	
32,000	.1260	.....	
33,000	.1540	.....	
34,000	.1650	.1667	
36,000	.21	.....	
38,000	.25	.....	
40,000	.30	.....	
42,000	.37	.....	
44,000	.45	.....	
46,000	.57	.....	
48,000	.75	.....	
50,000	1.14	.....	
50,120	.....	.....	Tensile strength.
0	1.72	.....	= 28.7 per cent.

Elongation of inch sections, ".19, ".23, ".46\*, ".43\*, ".21, ".20.  
 Diameter at fracture, ".55; area, .2376 square inch.  
 Contraction of area, 52.5 per cent.  
 Appearance of fracture, fine fibrous.

No. 7481.

Burden's Best Iron.  
 Heated full yellow and quenched in oil.  
 Diameter, ".795.  
 Sectional area, .50 square inch.  
 Length of stem, 7".  
 Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0006	0.	
10,000	.0017	0.	
15,000	.0028	0.	
20,000	.0036	0.	
25,000	.0049	0.	
30,000	.0061	0.	
35,000	.0076	.0003	Elastic limit.
36,000	.0081	.....	
37,000	.0088	.....	
38,000	.0104	.....	
39,000	.0150	.....	
40,000	.0518	.0424	
41,000	.0680	.....	
42,000	.0810	.....	
43,000	.0925	.....	
44,000	.1090	.....	
45,000	.1200	.1068	
46,000	.14	.....	
48,000	.18	.....	
50,000	.22	.....	
52,000	.26	.....	
54,000	.31	.....	
56,000	.39	.....	
58,000	.48	.....	
60,000	.67	.....	
61,360	.96	.....	Tensile strength.
0	1.20	.....	= 20 per cent.

Elongation of inch sections: ".17, ".13, ".11, ".14, ".19, ".46\*.  
 Diameter at fracture, ".57; area, .2552 square inch.  
 Contraction of area, 49 per cent.  
 Appearance of fracture, fine fibrous.

No. 7482.

Burden's Best Iron.

Heated full yellow and quenched in water.

Diameter, ".796.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0009	0.	
10,000	.0021	0.	
15,000	.0085	.0001	
20,000	.0048	.0001	
25,000	.0062	.0008	
26,000	.0066	.....	
27,000	.0070	.....	
28,000	.0072	.....	
29,000	.0077	.....	
30,000	.0080	.0014	
31,000	.0085	.....	
32,000	.0090	.....	
33,000	.0098	.....	
34,000	.0100	.....	
35,000	.0106	.0030	
36,000	.0114	.....	
37,000	.0122	.....	
38,000	.0132	.....	
39,000	.0150	.....	
40,000	.0172	.0088	
41,000	.0190	.....	
42,000	.0220	.....	
43,000	.0261	.....	
44,000	.0418	.....	
45,000	.0473	.0370	
46,000	.0660	.....	
47,000	.0642	.....	
48,000	.0740	.....	
49,000	.0849	.....	
50,000	.0980	.0860	
51,000	.1023	.....	
52,000	.1288	.....	
53,000	.1358	.....	
54,000	.1590	.....	
55,000	.1780	.1637	
56,000	.19	.....	
57,000	.22	.....	
58,000	.25	.....	
60,000	.30	.....	
62,000	.37	.....	
64,000	.45	.....	
65,000	.51	.....	
66,000	.62	.....	
66,280	.70	.....	
0	.95	.....	
			Tensile strength. =15.8 per cent.

Elastic limit indefinite.

Elongation of inch sections, ".10, ".17, ".42\*, ".10, ".08, .08".

Diameter at fracture, ".57; area, .2552 square inch.

Contraction of area, 49 per cent.

Appearance of fracture, fine fibrous.

No. 7483.

Norway Iron.  
 Heated full yellow and cooled in the air.  
 Diameter, ".792.  
 Sectional area, .50 square inch.  
 Length of stem, 7".  
 Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0018	0.	
15,000	.0028	0.	
18,000	.0083	.....	
19,000	.0086	.....	Elastic limit.
20,000	.0040	.0002	
21,000	.0170	.....	
20,000	.0270	.....	
21,000	.0600	.....	
22,000	.0785	.....	Sustained load 3 minutes.
23,000	.1260	.....	
24,000	.1511	.....	
25,000	.1513	.....	
26,000	.1521	.....	
27,000	.2080	.....	
28,000	.2330	.....	
29,000	.2560	.....	
30,000	.2900	.2825	
31,000	.30	.....	
32,000	.35	.....	Rested 5 minutes under load of 1,000 pounds per square inch.
33,000	.39	.....	
34,000	.43	.....	
35,000	.48	.....	
36,000	.48 +	.....	
37,000	.58	.....	
38,000	.65	.....	
39,000	.73	.....	
40,000	.88	.....	
41,000	1.00	.....	
42,000	1.28	.....	Tensile strength. = 37 per cent.
42,400	.....	.....	
0	2.22	.....	

Elongation of inch sections, ".31, ".79\*, ".36, ".27, ".25, ".24.

Minimum diameter, ".41; area, .1320 square inch.

Contraction of area, 73.6 per cent.

Bar not fractured. Test discontinued before rupture. Load on bar when test was discontinued, 13,000 pounds total=98,480 pounds per square inch.

No. 7484.

Norway Iron.

Heated full yellow and quenched in oil.

Diameter, ".797.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0010	0.	
10,000	.0021	0.	
15,000	.0031	0.	
18,000	.0038	0.	
19,000	.0042	.....	Elastic limit.
20,000	.0050	.....	
21,000	.0058	.0040	
22,000	.0179	.....	
22,000	.0535	.....	
23,000	.0775	.....	
24,000	.0800	.....	
25,000	.1070	.1013	
26,000	.1165	.....	
27,000	.1450	.1388	Rested 5 minutes under load of 1,000 pounds per square inch.
28,000	.1469	.....	
29,000	.1850	.....	
30,000	.2100	.2033	
31,000	.24	.....	
32,000	.27	.....	
33,000	.30	.....	
34,000	.34	.....	
35,000	.42	.....	
36,000	.50	.....	
40,000	.64	.....	
42,000	.88	.....	
43,000	1.00	.....	
44,000	1.27	.....	
44,240	1.70	.....	Tensile strength.
0	2.21	.....	= 36.8 per cent.

Elongation of inch sections, ".77\*", ".35", ".26", ".27", ".29", ".27.

Diameter at fracture, ".39; area, .1195 square inch.

Contraction of area, 76.1 per cent.

Appearance of fracture, fibrous.

No. 7485.

Norway Iron.

Heated full yellow and quenched in water.

Diameter, ".796.

Sectional area, .50 square inch.

Length of stem, 7".

Gauged length, 6".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0006	0.	
10,000	.0016	0.	
15,000	.0029	.0002	
16,000	.0032	-----	
17,000	.0037	-----	
18,000	.0045	-----	
19,000	.0051	-----	
20,000	.0061	.0020	
21,000	.0075	-----	
22,000	.0108	-----	
23,000	.0170	-----	
24,000	.0485	-----	
25,000	.0640	.0583	
26,000	.0648	-----	
27,000	.0880	-----	
28,000	.1080	-----	
29,000	.1153	-----	
30,000	.1430	.1362	
31,000	.1500	-----	
32,000	.1900	-----	
33,000	.21	-----	
34,000	.25	-----	
36,000	.31	-----	
38,000	.38	-----	
40,000	.47	-----	
42,000	.60	-----	
44,000	.76	-----	
46,000	1.19	-----	
46,300	-----	-----	Tensile strength.
0	2.12	-----	= 35.8 per cent.

Elastic limit indefinite.

Elongation of inch sections, ".26, ".24, ".25, ".68\*, ".43, ".26.

Diameter at fracture, ".39; area, .1195 square inch.

Contraction of area, 76.1 per cent.

Appearance of fracture, fibrous.

TABULATION OF TENSION TESTS ON WROUGHT IRON BARS AFTER TREATMENT.  
SECOND SERIES.

No. of test.	Kind of iron.	Treatment of specimen.	Sec- tional area.	Elastic limit per square inch.	Tensile strength per square inch.	Elong- ation in 6 inches.	Con- trac- tion of area.	Elongation of inch sections.	Appearance of fracture.
7474	Common refined.	Heated full yellow and cooled in air.	Sq. in.	Pounds.	Pounds.	Per ct.	Per ct.	" "	" "
7475	do.	Heated full yellow and quenched in oil.	.50	34,000	52,440	26.3	45.8	.19, .21, .28, .49*	25, .21
7476	do.	Heated full yellow and quenched in water.	.50	30,000	55,400	15.2	29.5	.12, .09, .12, .12, .15, .15*	Do.
			.50	30,000	60,400	16.7	43.5	.32*, .13, .13, .13, .14, .15	Do.
7477	Best puddled.	Heated full yellow and cooled in air.	.50	31,000	51,600	25.2	35.7	.19, .19, .22, .38*	29, .24
7478	do.	Heated full yellow and quenched in oil.	.50	29,000	55,760	24.0	35.7	.30, .22, .21, .27, .33*	21
7479	do.	Heated full yellow and quenched in water.	.50	29,000	57,120	14.2	29.5	.19, .13, .15, .14, .12, .12	Do.
7480	Burden's best.	Heated full yellow and cooled in air.	.50	35,000	50,120	28.7	52.5	.19, .23, .46*, .43*	21, .20
7481	do.	Heated full yellow and quenched in oil.	.50	35,000	61,850	20.0	49.0	.17, .13, .11, .14, .19, .46*	Fibrous; trace of granulation.
7482	do.	Heated full yellow and quenched in water.	.50	35,000	66,280	15.8	49.0	.10, .17, .42*, .10, .08, .08	Do.
7483	Norway.	Heated full yellow and cooled in air.	.50	20,000	42,400	37.0	73.6	.31, .79*, .35, .27, .25, .24	Fibrous.
7484	do.	Heated full yellow and quenched in oil.	.50	19,000	44,240	36.8	76.1	.77*, .35, .25, .27, .26, .27	Do.
7485	do.	Heated full yellow and quenched in water.	.50	19,000	46,800	35.3	76.1	.26, .24, .25, .68, .43*, .26	Do.



*coated bars.*

*Tensile stress, lbs per sq inch.*

*100 110 120 130*



No. 21

treated bars.

Tensile stress, lbs per sq. inch.

50,000

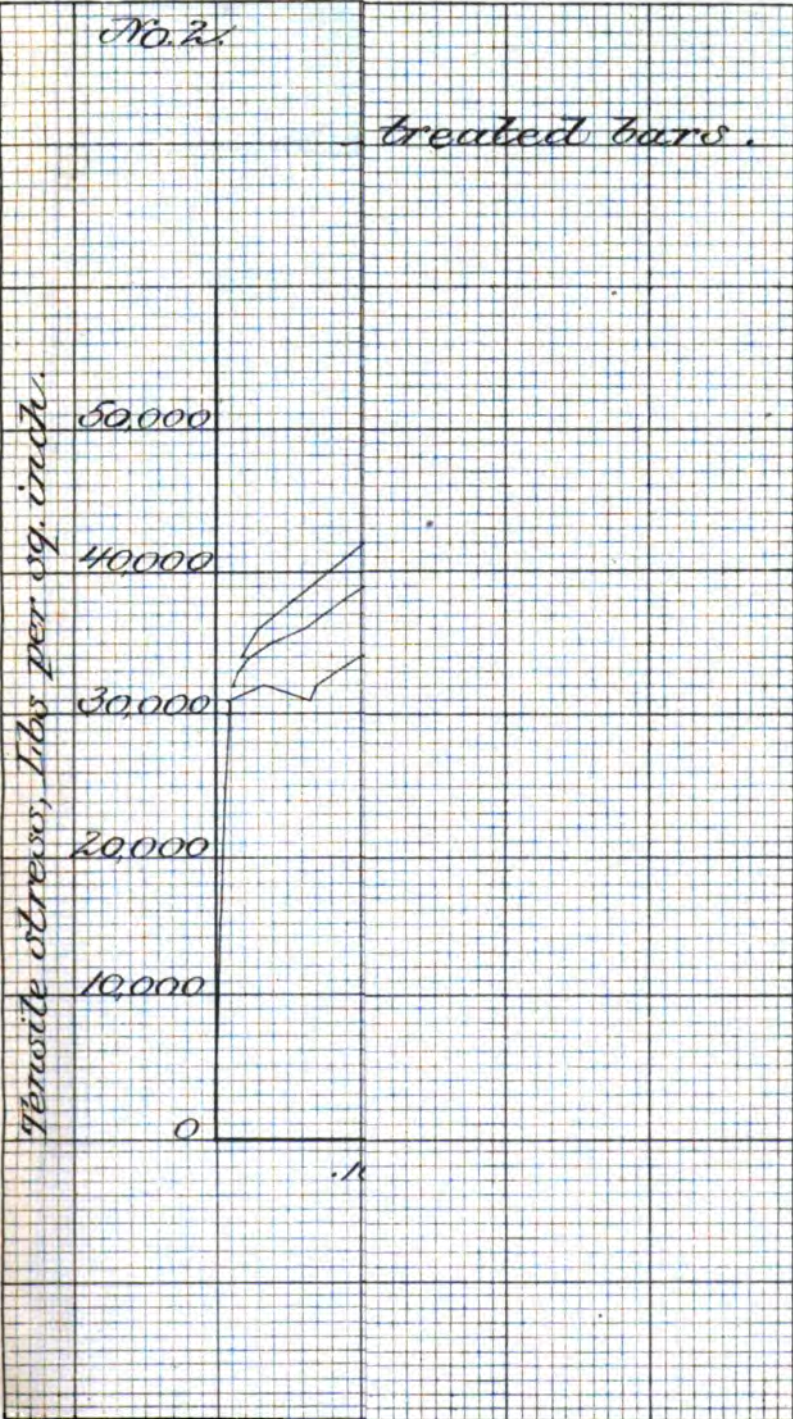
40,000

30,000

20,000

10,000

0





*of treated bars.*

*Tensile stress, Lbs per sq inch*

60

50

40

30


20

10

7

100

110




*2 bars.*

*ed in oil.*

*10*

*110*

*120*





THIRD SERIES.

STRENGTH AND ELONGATION OF WROUGHT IRON BARS BEFORE AND AFTER TREATMENT.

Rolled bars 1½ inches diameter treated and then turned down to size of specimens.

BEST PUDDLED IRON.

No. 7534.

Specimen in natural state from rolled bar.

Diameter, 1".129.

Sectional area, 1 square inch.

Length of stem, 22".

Gauged length, 20".

Applied loads, per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0082	0.	
10,000	.0068	.0001	
15,000	.0104	.0001	
20,000	.0142	.0002	
25,000	.0182	.0007	
26,000	.0191		
27,000	.0202	.....	
28,000	.0213		
29,000	.0224		
30,000	.0235	.0025	Elastic limit. Not well defined.
31,000	.0250	.....	
32,000	.0266		
33,000	.0285		
34,000	.0312		
35,000	.0722	.0465	
36,000	.1070		
37,000	.1596	.....	
34,000	.....		Rested under load 15 minutes.
38,000	.16	.....	
39,000	.19	.....	
40,000	.24	.....	
41,000	.27	.....	
42,000	.33	.....	
43,000	.39	.....	
44,000	.48	.....	
45,000	.57	.....	
46,000	.66	.....	
47,000	.75	.....	
48,000	.88	.....	
49,000	1.02	.....	
50,000	1.17	.....	
51,000	1.30	.....	
52,000	1.52	.....	
53,000	1.78	.....	
54,000	2.11	.....	Tensile strength.
0	2.18	.....	=10.9 per cent.

Elongation of inch sections, ".10, ".10, ".10, ".11, ".10, ".10, ".11, ".10, ".10, ".10, ".11, ".10, ".12, ".20\*, ".11, ".10, ".11, ".10, ".11, ".10.

Diameter at fracture, 1".04; area, .8495 square inch.

Contraction of area, 15 per cent.

Fractured 8".3 from the neck.

Appearance, fibrous 80 per cent, granular 20 per cent.

No. 7535.

Specimen heated full yellow and cooled in air.

Diameter, 1".129.

Sectional area, 1 square inch.

Length of stem, 22".

Gauged length, 20".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0030	0.	
10,000	.0068	0.	
15,000	.0102	0.	
20,000	.0141	.0001	
25,000	.0186	.0010	
26,000	.0200	.....	
27,000	.0216	.....	
28,000	.0230	.....	
29,000	.0242	.....	Elastic limit.
30,000	.0280	.0069	
31,000	.0372	.....	
32,000	.0680	.....	
33,000	.0948	.....	
34,000	.1200	.....	
35,000	.1510	.1238	
36,000	.18	.....	
37,000	.21	.....	
38,000	.26	.....	
39,000	.33	.....	
40,000	.38	.....	
41,000	.45	.....	
42,000	.55	.....	
43,000	.60	.....	
44,000	.69	.....	
45,000	.79	.....	
46,000	.90	.....	
47,000	1.00	.....	
48,000	1.11	.....	
49,000	1.30	.....	
50,000	1.46	.....	
51,000	1.67	.....	
51,800	.....	.....	Tensile strength.
0	1.88	.....	= 9.4 per cent.

Elongation of inch sections, ".08, ".08, ".08, ".08, ".08, ".09, ".09, ".08, ".09, ".09, ".10, ".08, ".09, ".09, ".11, ".11, ".20\*, ".08, ".10, ".08.

Diameter at fracture, 1".03; area, .8332 square inch.

Contraction of area, 16.7 per cent.

Fractured 5".25 from the neck.

Appearance, fibrous 60 per cent, granular 40 per cent.

No. 7536.

Specimen heated full yellow and quenched in brine.  
 Diameter, 1".129.  
 Sectional area, 1 square inch.  
 Length of stem, 22".  
 Gauged length, 20".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0080	0.	
10,000	.0068	0.	
15,000	.0107	0.	
20,000	.0147	.0001	
21,000	.0158	.....	
22,000	.0169	.....	
23,000	.0179	.....	
24,000	.0190	.....	
25,000	.0209	.0020	
26,000	.0220	.....	
27,000	.0233	.....	
28,000	.0250	.....	
29,000	.0266	.....	
30,000	.0290	.0068	
31,000	.0310	.....	
32,000	.0330	.....	
33,000	.0359	.....	
34,000	.0390	.....	
35,000	.0440	.0179	
36,000	.0485	.....	
37,000	.0568	.....	
38,000	.0680	.....	
39,000	.0680	.....	
40,000	.1120	.0806	
41,000	.12	.....	
42,000	.15	.....	
43,000	.18	.....	
44,000	.22	.....	
45,000	.26	.....	
46,000	.29	.....	
47,000	.34	.....	
48,000	.39	.....	
49,000	.44	.....	
50,000	.54	.....	
51,000	.59	.....	
52,000	.73	.....	
53,000	1.04	.....	
54,000	.....	.....	Tensile strength. = 6.6 per cent.
0	1.33	.....	

Elongation of inch sections, ".07, ".07, ".06, ".07, ".07, ".07, ".07, ".06, ".06, ".07, ".06, ".07, ".06, ".06, ".07, ".06, ".05, ".05, ".07, ".11\*.

Diameter at fracture, 1".07; area, .8992 square inch.  
 Contraction of area, 10.1 per cent.  
 Fractured 1".34 from the neck.  
 Appearance, granular 60 per cent, fibrous 40 per cent.

No. 7537.

Heated full yellow and quenched in oil.

Diameter, 1".129.

Sectional area, 1 square inch.

Length of stem, 22".

Gauged length, 20".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0080	0.	
10,000	.0068	0.	
15,000	.0104	0.	
20,000	.0149	.0005	
21,000	.0160	.....	
22,000	.0170	.....	
23,000	.0180	.....	
24,000	.0190	.....	
25,000	.0201	.0024	Elastic limit. Not well defined.
26,000	.0219	.....	
27,000	.0235	.....	
28,000	.0247	.....	
29,000	.0261	.....	
30,000	.0282	.0065	
31,000	.0307	.....	
32,000	.0335	.....	
33,000	.0403	.....	
34,000	.0450	.....	
35,000	.0540	.0278	
36,000	.0732	.....	
37,000	.1020	.....	
38,000	.1340	.....	
39,000	.1791	.....	
40,000	.2129	.1803	
42,000	.28	.....	
44,000	.37	.....	
46,000	.52	.....	
48,000	.73	.....	
48,100	.....	.....	Tensile strength.
0	.84	.....	= 4.2 per cent.

Elongation of inch sections, ".04, ".03, ".04, ".03, ".04, ".04, ".04, ".03, ".03, ".03, ".04, ".04, ".04, ".04, ".04, ".03, ".04, ".04, ".03, ".05, ".14\*.

Diameter at fracture, 1".07; area, .8992 square inch.

Contraction of area, 10.1 per cent.

Fractured 1".25 from the neck.

Appearance, granular 60 per cent, fibrous 40 per cent.

No. 7538.

Heated full yellow, quenched in brine, reheated as before and cooled in the air.

Diameter, 1".129.

Sectional area, 1 square inch.

Length of stem, 22".

Gauged length, 20".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0081	0.	
10,000	.0069	0.	
15,000	.0108	0.	
20,000	.0142	.0001	
21,000	.0150	.....	
22,000	.0160	.....	
23,000	.0170	.....	
24,000	.0180	.....	
25,000	.0191	.0016	
26,000	.0208	.....	
27,000	.0218	.....	
28,000	.0231	.....	
29,000	.0251	.....	
30,000	.0288	.0078	
31,000	.0328	.....	
32,000	.0510	.....	
38,000	.0832	.....	
34,000	.1085	.....	
35,000	.1390	.1119	
36,000	.17	.....	
38,000	.27	.....	
40,000	.41	.....	
42,000	.55	.....	
44,000	.71	.....	
46,000	.89	.....	
48,000	1.12	.....	
50,000	1.43	.....	
52,000	1.83	.....	
58,100	.....	.....	Tensile strength. = 9.9 per cent.
0	1.99	.....	

Elongations of inch sections, ".10, ".08, ".10, ".09, ".09, ".10, ".10, ".09, ".09, ".09, ".09, ".09, ".09, ".09, ".09, ".09, ".09, ".10, ".08, ".10, ".12, ".21\*.

Diameter at fracture, 1".03; area, .8332 square inch.

Contraction of area, 16.7 per cent.

Fractured 2".28 from the neck.

Appearance, granular 30 per cent, fibrous 70 per cent.

No. 7539.

Heated full yellow, quenched in oil, reheated and cooled in air.  
 Diameter, 1".129.  
 Sectional area, 1 square inch.  
 Length of stem, 22".  
 Gauged length, 20".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0080	0.	
10,000	.0087	0.	
15,000	.0104	0.	
20,000	.0140	0.	
21,000	.0145	.....	
22,000	.0156	.....	
23,000	.0165	.....	
24,000	.0173	.....	
25,000	.0181	.0004	
26,000	.0198	.....	
27,000	.0204	.....	
28,000	.0218	.....	
29,000	.0224	.....	
30,000	.0266	.0060	
31,000	.0359	.....	
32,000	.0634	.....	
33,000	.0698	.....	
34,000	.0940	.....	
35,000	.1235	.0968	
36,000	.14	.....	
38,000	.20	.....	
40,000	.31	.....	
42,000	.44	.....	
44,000	.58	.....	
46,000	.77	.....	
48,000	.99	.....	
50,000	1.26	.....	
52,000	1.64	.....	
58,800	.....	.....	
0	2.18	.....	Tensile strength. = 10.7 per cent.

Elongation of inch sections, ".12, ".11, ".10, ".10, ".09, ".10, ".10, ".09, ".09, ".10, ".10, ".10, ".10, ".11, ".12, ".11, ".12, ".12, ".13, ".13.

Diameter at fracture, 1".01; area, .8012 square inch.

Contraction of area, 19.9 per cent.

Fractured 1".25 from the neck.


Appearance, fibrous 60 per cent, granular 40 per cent. Fractured outside the gauged length. Elongation ".21 on the inch section which fractured.

**TABULATION OF TENSION TESTS OF WROUGHT IRON BEFORE AND AFTER TREATMENT.  
BEST PUDDLED IRON.**

**THIRD SERIES.**

No. of test.	Treatment of bar.	Sec- tional area.	Elastic limit per square inch.	Tensile strength per square inch.	Elonga- tion in 20 inches.	Contra- ction of area.	Elongation of inch sections.	Appearance of fracture.
7584	Natural state.....	Sq. in. 1.00	Pounds. 30,000	Pounds. 54,000	Per cent. 10.9	Per cent. 16.0	Inch. .10, .10, .10, .11, .10, .10, .11, .10, .10, .10, .11, .10, .12, .20 <sup>a</sup> , .11, .10, .11, .10, .11, .10.	Fibrous, 80 per cent; granular, 20 per cent.
7585	Heated full yellow and cooled in air.....	1.00	29,000	51,800	9.4	16.7	.08, .08, .08, .08, .08, .09, .09, .08, .09, .09, .10, .08, .09, .09, .11, .11, .20 <sup>a</sup> , .06, .10, .06.	Fibrous, 60 per cent; granular, 40 per cent.
7586	Heated full yellow and quenched in brine.....	1.00	28,000	54,000	6.6	10.1	.07, .07, .06, .07, .07, .07, .06, .06, .07, .06, .07, .06, .06, .07, .06, .06, .06, .07, .11 <sup>a</sup> .	Fibrous, 40 per cent; granular, 60 per cent. Do.
7587	Heated full yellow and quenched in oil.....	1.00	25,000	48,100	4.2	10.1	.04, .08, .04, .08, .04, .04, .04, .08, .08, .08, .04, .04, .04, .04, .08, .04, .04, .06, .06, .06, .14 <sup>a</sup> .	Fibrous, 70 per cent; granular, 30 per cent.
7588	Heated full yellow, quenched in brine, re- heated as before, and cooled in air.	1.00	25,000	53,100	9.9	15.7	.10, .08, .10, .09, .09, .10, .10, .09, .09, .09, .09, .09, .09, .09, .09, .10, .08, .10, .12, .21 <sup>a</sup> .	Fibrous, 40 per cent; granular, 40 per cent.
7589	Heated full yellow, quenched in oil, re- heated as before, and cooled in air.	1.00	27,000	53,800	10.7	19.9	.12, .11, .10, .10, .09, .10, .10, .09, .09, .09, .10, .10, .10, .11, .12, .11, .12, .12, .12, .13, .13.	Fibrous, 40 per cent; granular, 40 per cent.

Elastic limits not well defined.






---

---

**CARBON AND NICKEL STEEL INGOTS.**

---

---



## CARBON AND NICKEL STEEL INGOTS.

INGOTS CUT UP FOR EXAMINATION, AND MATERIAL FOR TENSILE AND  
ENDURANCE TESTS TAKEN THEREFROM.

## CHEMICAL ANALYSES.

## Carbon steel ingot:


Carbon .....	.20
Manganese .....	.58
Silicon .....	.015
Phosphorus .....	.017

## Nickel steel ingot:

Carbon .....	.17
Manganese .....	.68
Silicon .....	.016
Phosphorus .....	.010
Nickel .....	3.25

No. 1.—16" x 18" CARBON STEEL INGOT.

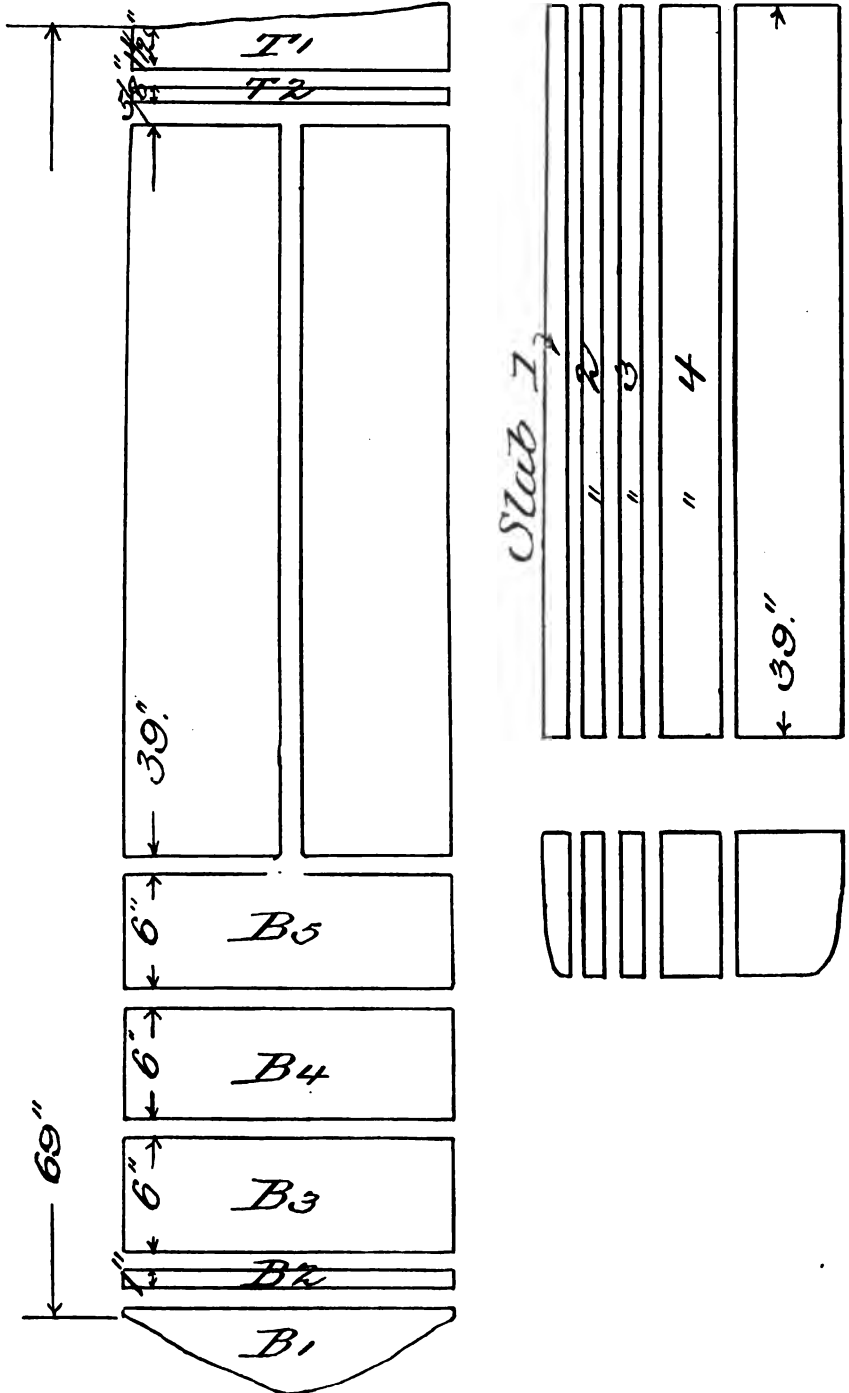Showing manner of cutting up for examination.



No. 2.—16" x 18" CARBON STEEL INGOT.

Slab 2.—Tension tests.

Slab 3.—Endurance tests.

*Inside edge.*




*Outside edge.*

39"

*Inside edge.*




*Outside edge.*



Metal tested in the natural state and after heating and quenching.

No. 3.—16" x 18" NICKEL STEEL INGOT.

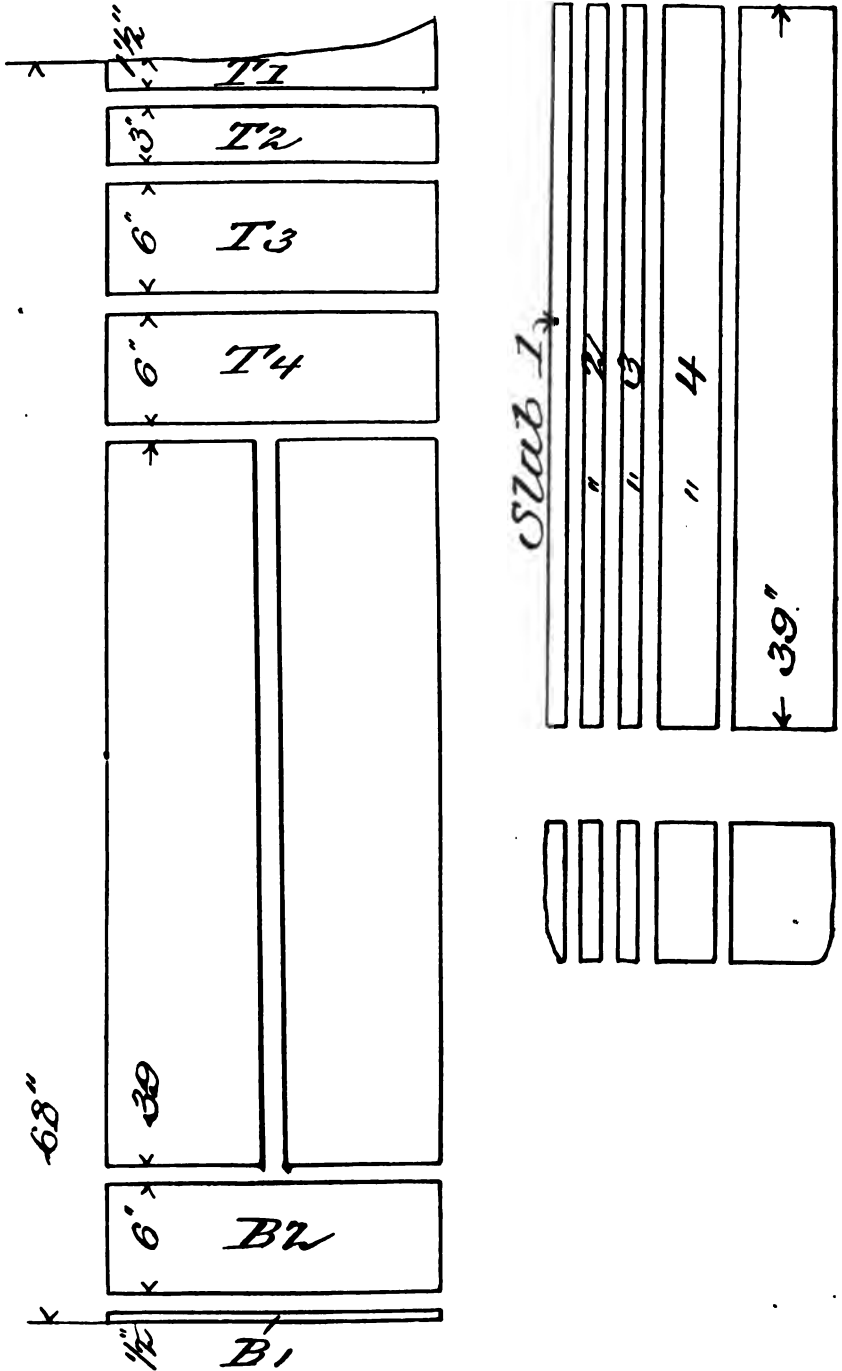
Showing manner of cutting up for examination.



No. 4.—16" x 18" NICKEL STEEL INGOT.

Slab 2.—Tension tests.

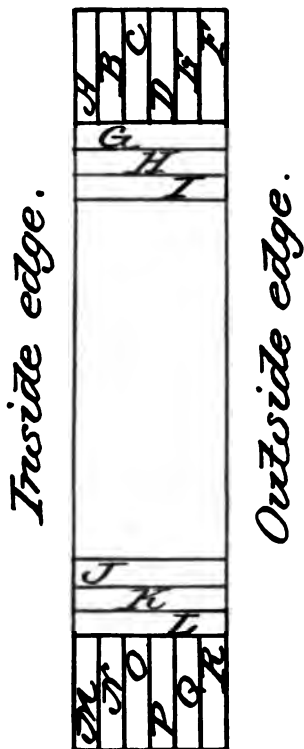
Slab 3.—Endurance tests.



^



< 39"




Metal tested in the natural state and after heating and quenching.

CARBON AND NICKEL STEEL INGOTS.


No. 5.—16" x 18" STEEL INGOTS.

Showing manner of cutting up for examination.

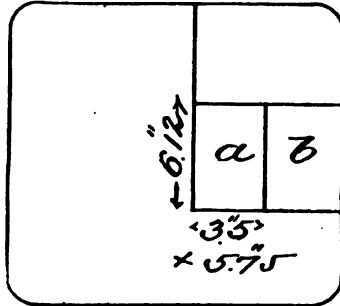
Carbon steel, block B 4.




Tensile specimens (2) piece a.




Bending specimen from b.




Nickel steel, block T 3.

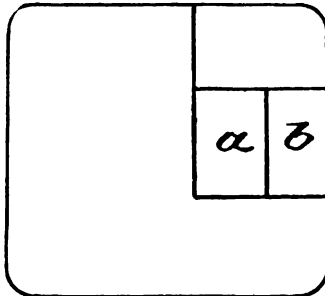


Piece a before forging.

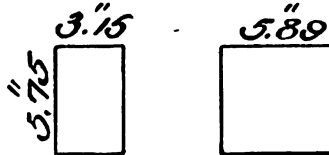


After forging.

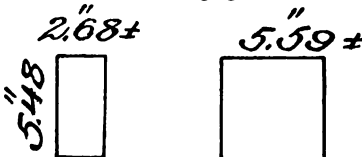


After machining.

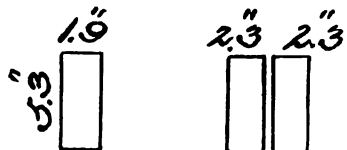




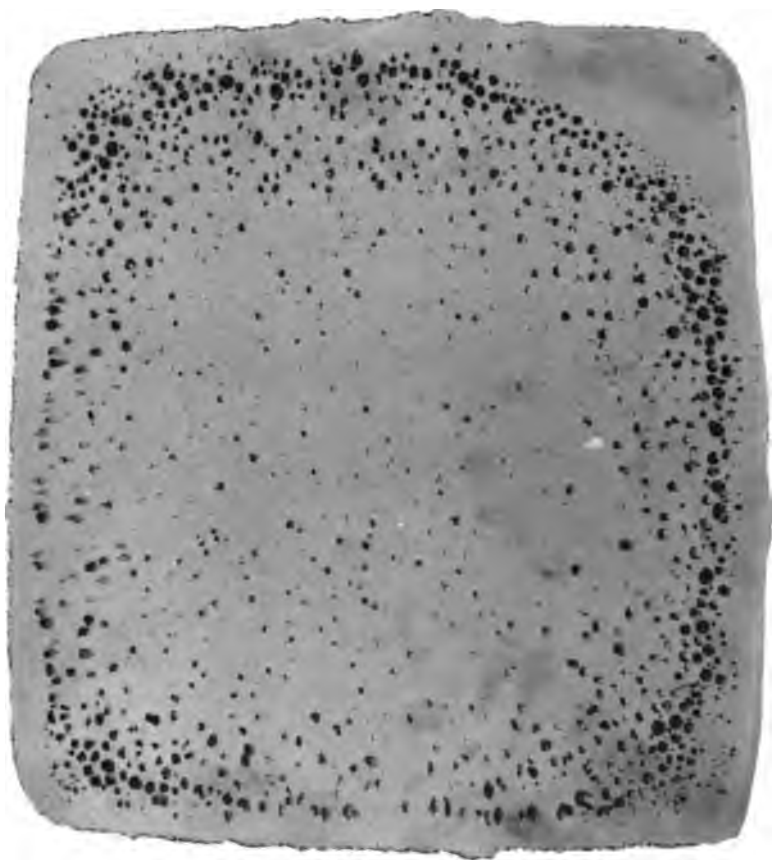

NO. 6.  
CARBON STEEL INGOT.  
BLOCK B1  $\frac{1}{2}$  INCH FROM THE BOTTOM.



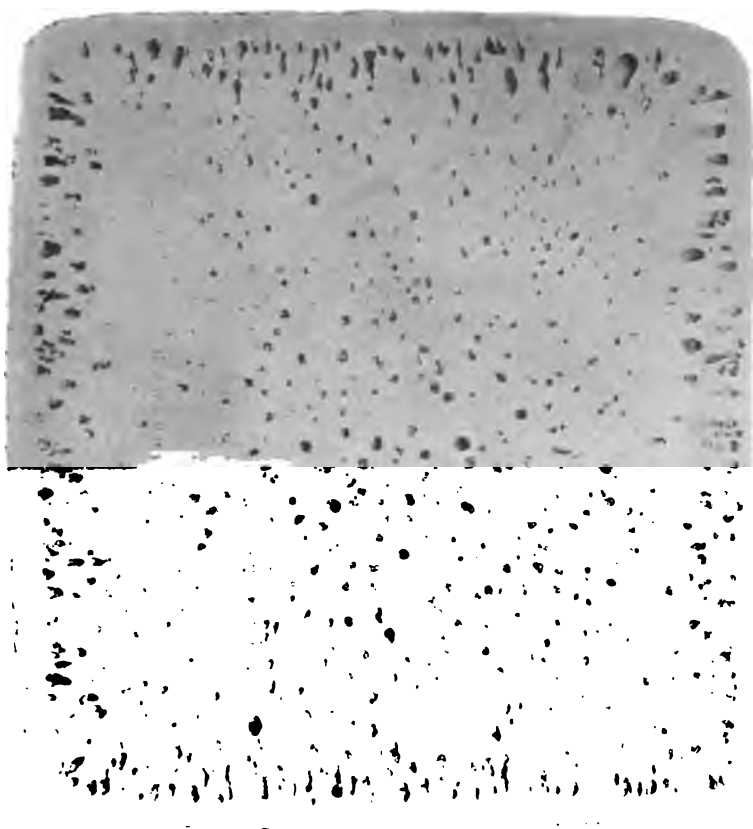


NO. 7.

CARBON STEEL INGOT.

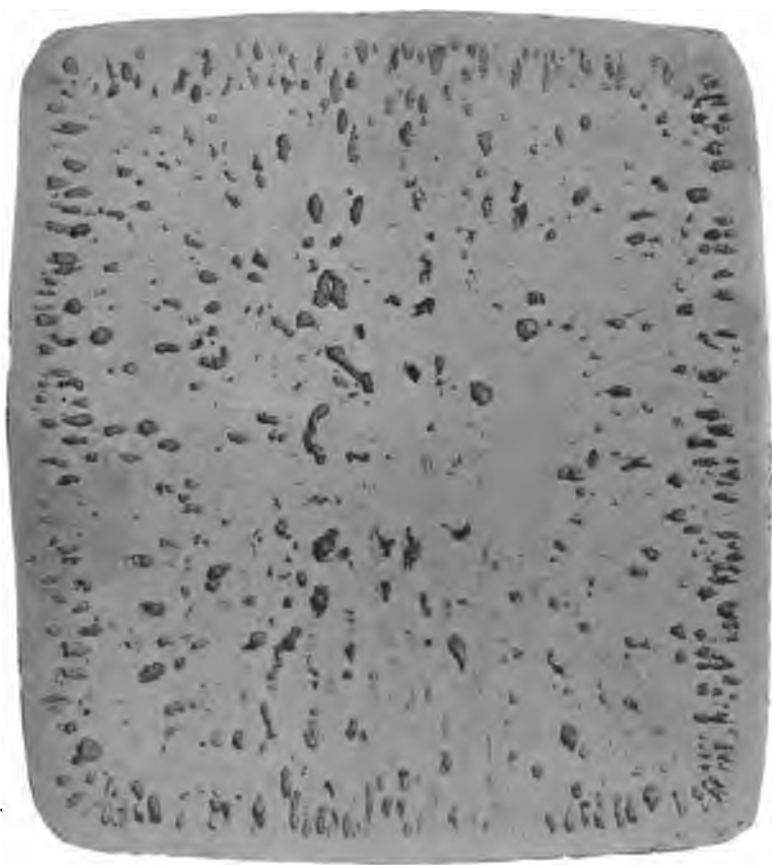
BLOCK NO. 2 $\frac{1}{2}$  INCHES FROM THE BOTTOM.






NO. 5.

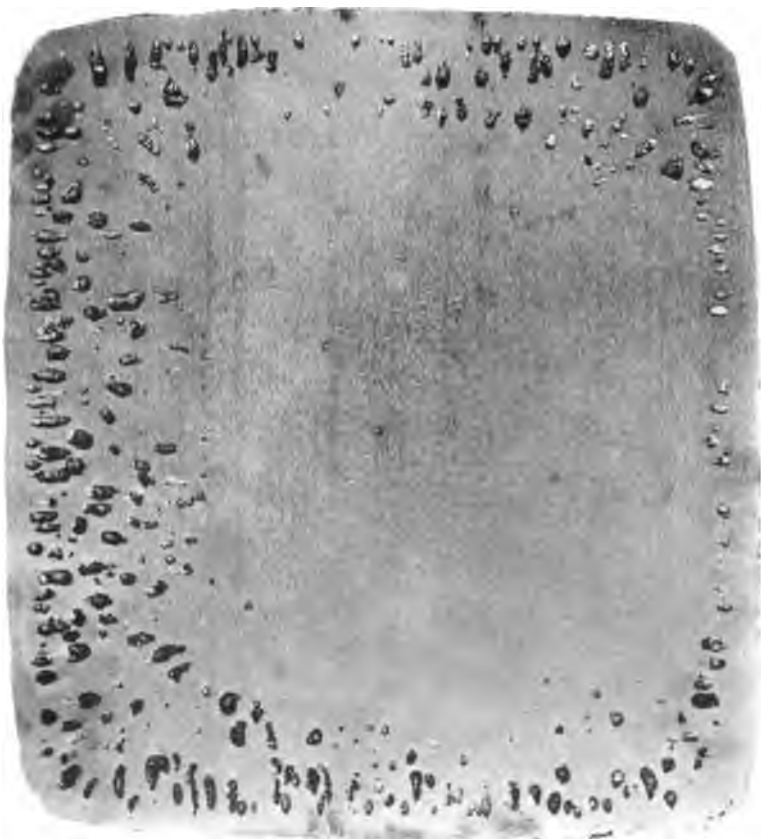
CARBON STEEL INGOT, BLOCK B.3. 0.12 INCHES FROM THE BOTTOM.





NO. 9.

CARBON STEEL INGOT, BLOCK B4. 16 1-2 INCHES FROM THE BOTTOM.








NO. 10.

CARBON STEEL INGOT, BLOCK B5. 23 1/2 INCHES FROM THE BOTTOM.







NO. 11.


CARBON STEEL INGOT.

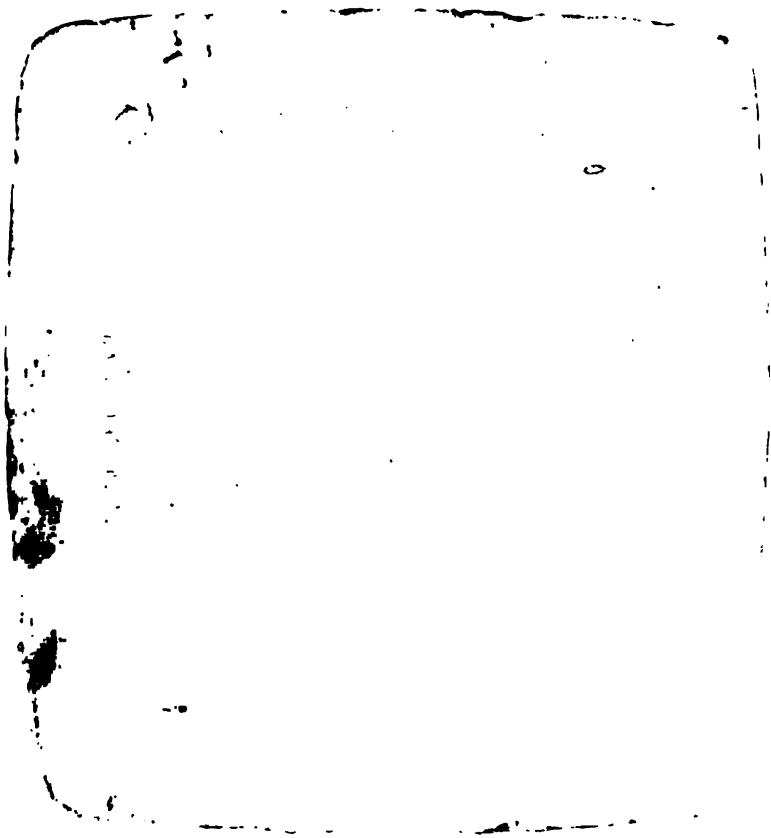LONGITUDINAL SECTION, MIDDLE OF LENGTH OF INGOT.






NO. 12.  
CARBON STEEL INGOT  
BLOCK 12. 2 INCHES FROM THE T. P.





NO. 13.


NICKEL STEEL PIVOT, BLOCK B1. 1-2 INCH FROM THE BOTTOM.







NO. 14.  
NICKEL STEEL INGOT.  
BLOCK B2.  $7\frac{1}{2}$  INCHES FROM THE BOTTOM.






NO. 15.

NICKEL STEEL INGOT.

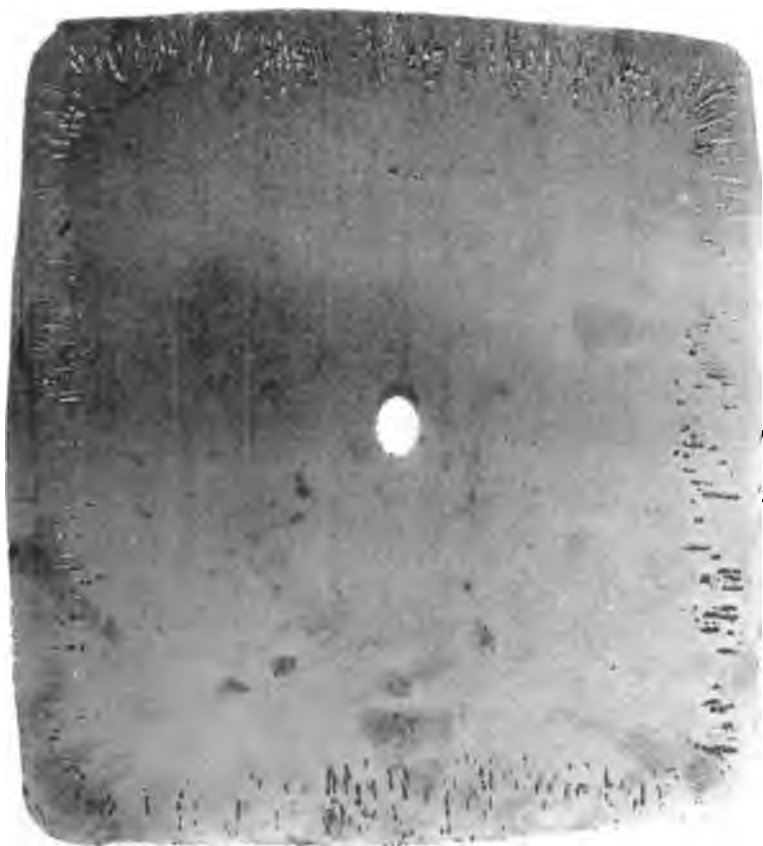
LONGITUDINAL SECTION, MIDDLE OF LENGTH OF INGOT.





NO. 16  
NICKEL STEEL INGOT,  
BLOCK T4, 18 $\frac{1}{2}$  INCHES FROM THE TOP.



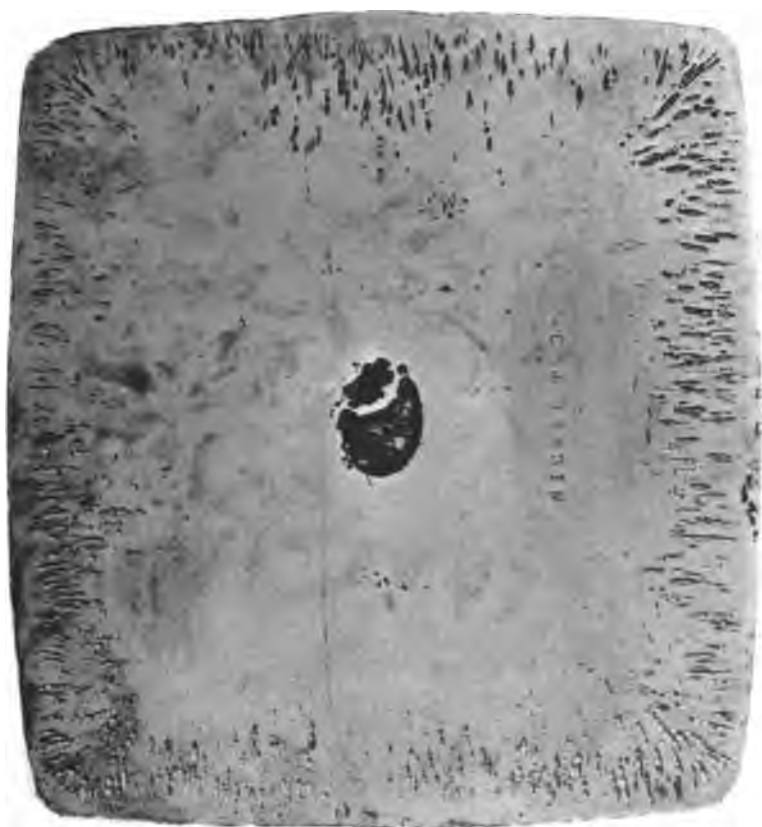


NO. 17.

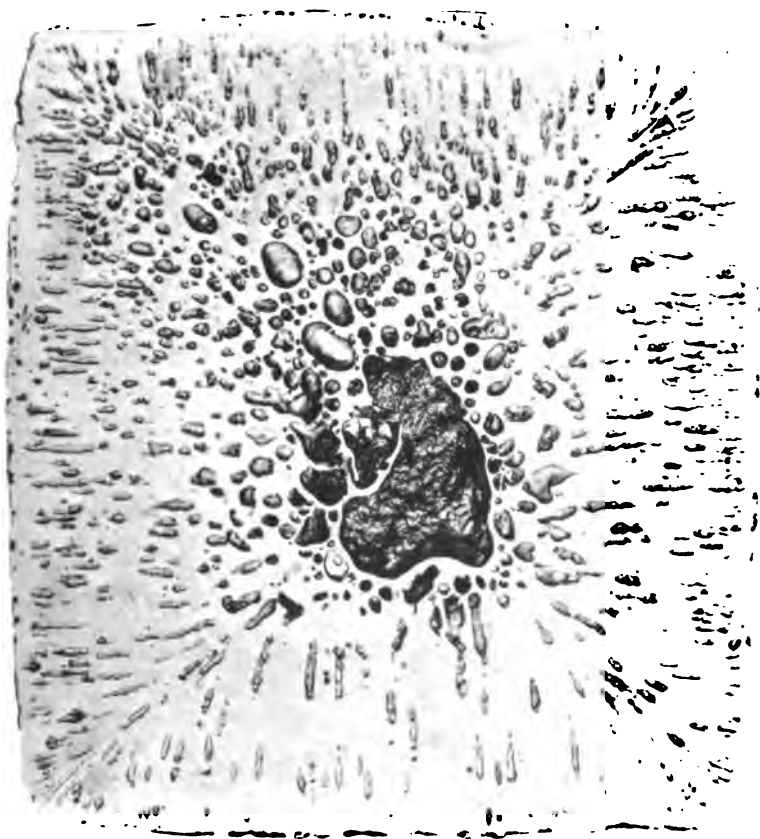NICKEL STEEL INGOT, BLOCK T3, 11 1-2 INCHES FROM THE TOP.







NO. 18.

NICKEL STEEL INGOT.

BLOCK 12. 4½ INCHES FROM THE TOP.





NO. 19.  
NICKEL STEEL INGOT.  
BLOCK T1  $\frac{1}{2}$  INCH FROM THE TOP.





NO. 20.

CARBON STEEL INGOT, BLOCK B4, PIECE A. APPEARANCE AS TAKEN FROM THE INGOT. SUBSEQUENTLY DRAWN OUT IN THE FORGE SHOP, AT A WELDING HEAT, FOR TENSILE SPECIMENS NOS. 7471 AND 7472. AND BAR FOR BENDING TEST.




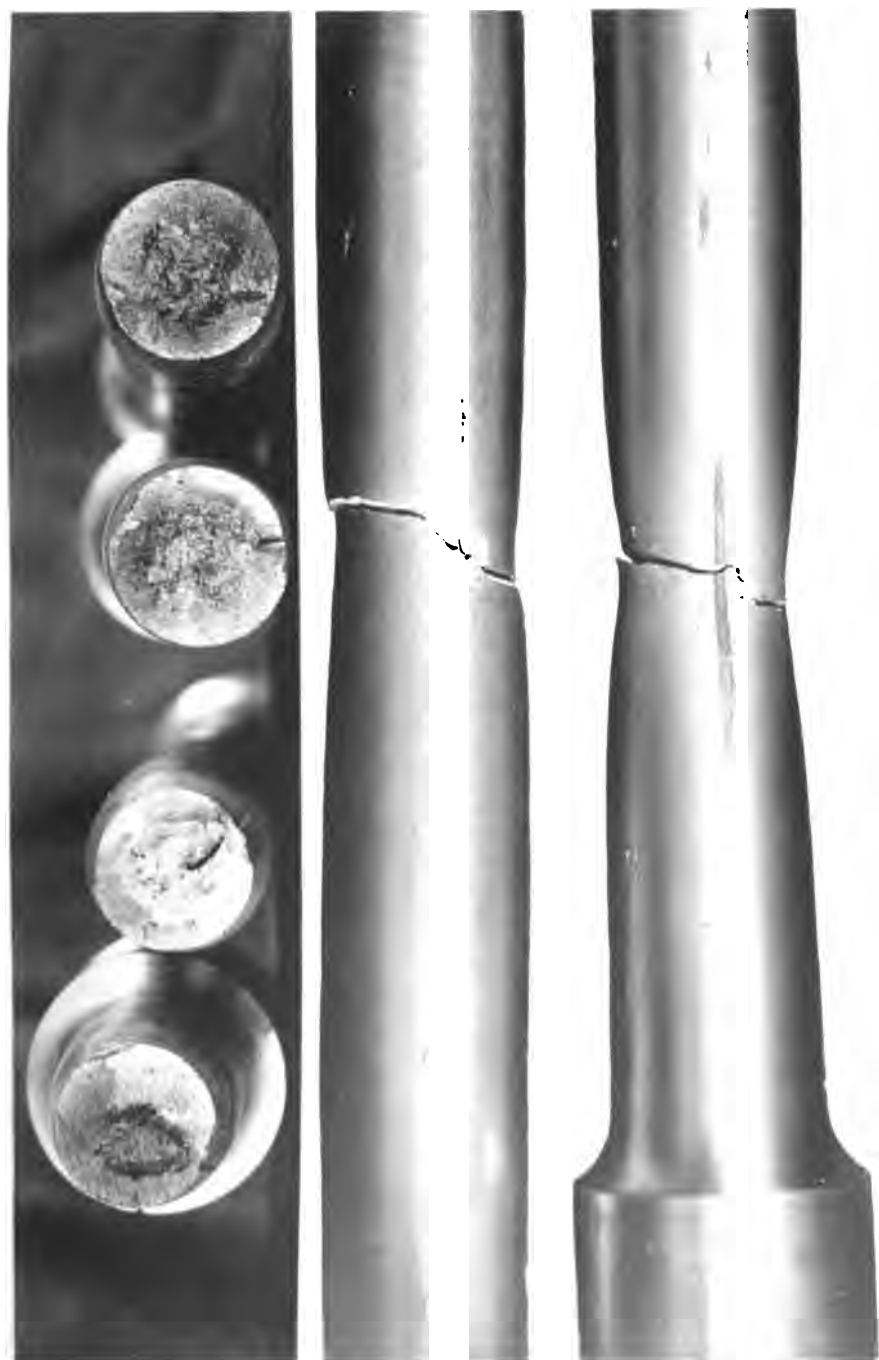


Fig. 10  
A. B. C. D. E. F. G. H. I. J. K. L. M. N. O. P. Q. R. S. T. U. V. W. X. Y. Z.

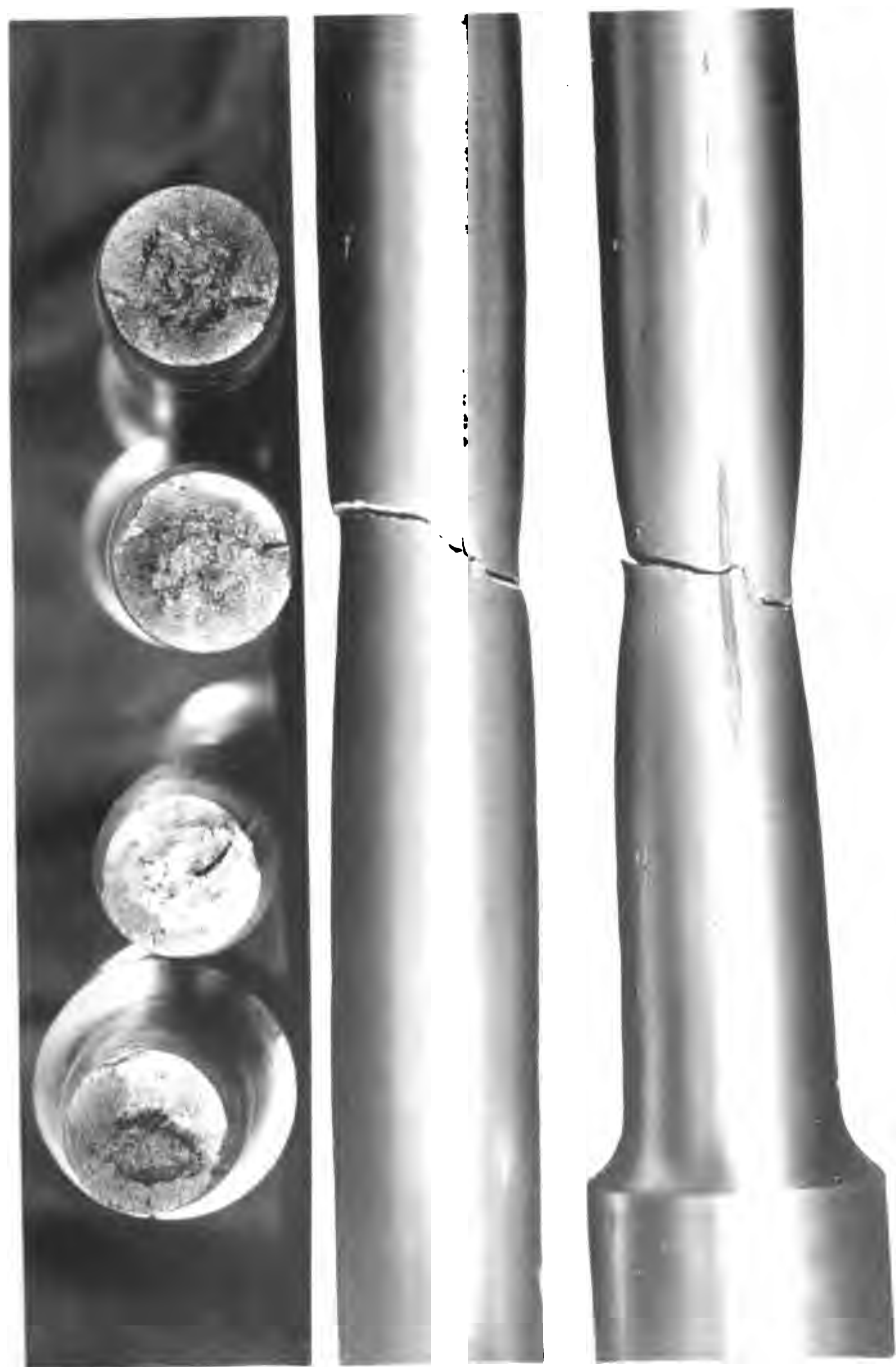






201-178

PIPE WELDED JOINT

FIGURE 14. PIPE WELDED JOINT, LOW-TEMPERATURE STEEL, 201-178, 1971, AND 1972





NO. 21B.

CARBON STEEL INGOT, BLOCK B4, PIECE A. FINISHED EAR, FOR BENDING TEST.

HELIOTYPE CO., BOSTON.





NO. 23.

NICKEL STEEL INGOT, BLOCK T3, PIECE A. APPEARANCE AFTER CLOSING VENTS,  
UNDER THE HAMMER AT A FORGING HEAT.


1977



NO. 24.

NICKEL STEEL INGOT, BLOCK T3, PIECE A. APPEARANCE AFTER MACHINING.  
SURFACE METAL PLANED OFF AND PIECE CUT APART.

HELIOTYPE CO., BOSTON.








PHOTOGRAPHED BY THE U.S. GEOLOGICAL SURVEY  
WASHINGTON, D.C. 20540  
MAY 1964





FIGURE 1. A circular, high-contrast, black and white image showing a dense, textured surface, possibly a microscopic view of a material or a biological specimen. The texture is irregular and granular, with varying shades of gray and black, suggesting a complex, porous, or fibrous structure. The image is centered on the page.






PHOTOMICROGRAPH, CARBON STEEL INGOT. LONGITUDINAL SECTION  
2 1/2 IN. FROM BOTTOM OF INGOT, 1 1/4 IN. FROM EDGE.  
MAGNIFICATION 5 DIAMETERS.






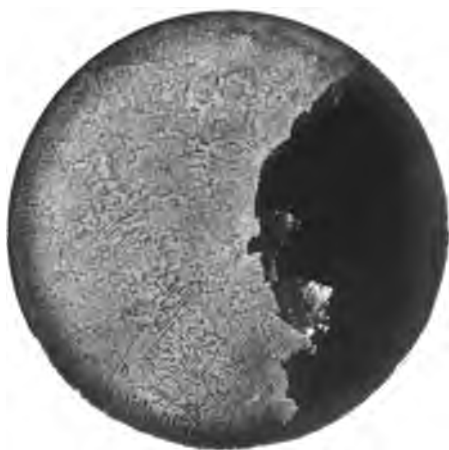CARBON STEEL INGOT.  
PHOTOMICROGRAPH, 12 INCHES FROM TOP OF INGOT,  $4\frac{1}{2}$  INCHES FROM S. E.,  
LONGITUDINAL SECTION. MAGNIFICATION 5 DIAMETERS.









CARBON STEEL INGOT.  
PHOTOMICROGRAPH, 12 INCHES FROM TOP OF INGOT, AT EDGE OF CENTRAL CAVITY,  
2 1/4 INCHES DIAMETER LONGITUDINAL SECTION. MAGNIFICATION 5 DIAMETERS.





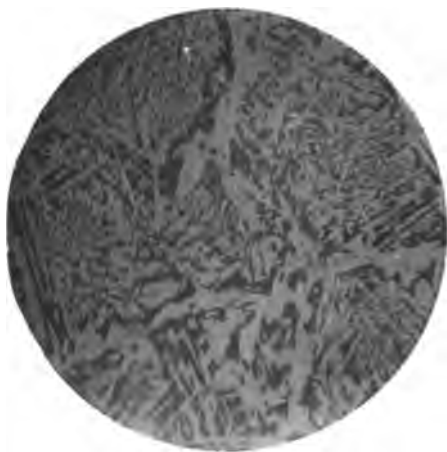PHOTOMICROGRAPH OF STEM OF TENSILE SPECIMEN C2-A, NO. 7568, CROSS SECTION,  
CARBON STEEL INGOT. MAGNIFICATION 55 DIAMETERS.  
STEEL IN NATURAL STATE. THREE VIEWS, 1.






PHOTOMICROGRAPH OF STEM OF TENSILE SPECIMEN C2-A, NO. 1708, CROSS SECTION,  
CARBON STEEL INGOT. MAGNIFICATION 56 DIAMETERS.  
STEEL IN NATURAL STATE. THREE VIEWS, 2.





PHOTOMICROGRAPH OF STEM OF TENSILE SPECIMEN OF A 1045 CARBON STEEL IN OILY GLASS SECTION, STEEL IN NATURAL STATE  
MAGNIFICATION 1000 X DIAMETER OF FIELD VIEW 0.15 MM





METAL FROM CARBON STEEL INGOT, SLAB No. 2.

No. 7568.

Longitudinal specimen.  
 Natural state.  
 Marks, C2-A.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	0.	
15,000	.0018	.0001	
16,000	.0020	.....	Elastic limit.
17,000	.0022	.....	
18,000	.0080	.....	
19,000	.0041	.....	
20,000	.0065	.0040	
22,000	.0099	.....	
24,000	.0150	.....	
26,000	.0222	.....	
28,000	.0286	.....	
30,000	.0386	.0347	
32,000	.0475	.....	
34,000	.0663	.....	
36,000	.0670	.....	
38,000	.0810	.....	
40,000	.0960	.0894	
42,000	.11	.....	
44,000	.14	.....	
46,000	.16	.....	
48,000	.18	.....	
50,000	.22	.....	
52,000	.27	.....	
54,000	.35	.....	
54,880	.....	.....	Tensile strength.
0	.45	.....	= 15 per cent.

Elongation of inch sections, ".13, ".13, ".19\*.  
 Diameter at fracture, ".50; area, .1964 square inch.  
 Contraction of area, 21.4 per cent.  
 Fractured ".50 from the neck.  
 Appearance, dull, amorphous, oblique.

No. 7569.

Longitudinal specimen.

Natural state.

Marks, C2-D.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0006	0.	
10,000	.0011	0.	
15,000	.0019	.0001	
16,000	.0023	.....	Elastic limit.
17,000	.0030	.....	
18,000	.0043	.....	
19,000	.0056	.....	
20,000	.0075	.0061	
22,000	.0119	.....	
24,000	.0183	.....	
26,000	.0258	.....	
28,000	.0332	.....	
30,000	.0428	.0889	
32,000	.0520	.....	
34,000	.0638	.....	
36,000	.0760	.....	
38,000	.0891	.....	
40,000	.1069	.1012	
42,000	.13	.....	
44,000	.15	.....	
46,000	.18	.....	
48,000	.21	.....	
50,000	.26	.....	
52,000	.33	.....	
58,120	.....	.....	Tensile strength.
0	.43	.....	=14.3 per cent.

Elongation of inch sections, ".13, ".18, ".17\*.

Diameter at fracture, ".50; area, .1964 square inch.

Contraction of area, 21.4 per cent.

Fractured ".50 from the neck.

Appearance, coarse granular, silvery luster.

No. 7570.

Longitudinal specimen.  
 Natural state.  
 Marks, C2-F.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0005	0.	
10,000	.0011	0.	
15,000	.0019	.0001	
16,000	.0020	.....	Elastic limit.
17,000	.0028	.....	
18,000	.0041	.....	
19,000	.0058	.....	
20,000	.0086	.0061	
22,000	.0135	.....	
24,000	.0196	.....	
26,000	.0280	.....	
28,000	.0360	.....	
30,000	.0460	.0421	
32,000	.06	.....	
34,000	.08	.....	
36,000	.09	.....	
38,000	.10	.....	
40,000	.12	.....	
42,000	.14	.....	
44,000	.17	.....	
46,000	.20	.....	
47,600	.....	.....	Tensile strength.
0	.31	.....	=10.3 per cent.

Defective specimen, spongy.  
 Elongation of inch sections, ".08, ".15\*, ".08.  
 Diameter at fracture, ".49; area, .1886 square inch.  
 Contraction of area, 24.6 per cent.  
 Fractured at the middle of the stem.  
 Appearance, dull, amorphous, oblique.

No. 7571.

Transverse specimen.

Natural state.

Marks, C2-H.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3" .

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	0.	
15,000	.0019	0.	
16,000	.0020	.....	Elastic limit.
17,000	.0028	.....	
18,000	.0039	.....	
19,000	.0060	.....	
20,000	.0069	.0048	
22,000	.0120	.....	
24,000	.0180	.....	
26,000	.0252	.....	
28,000	.0328	.....	
30,000	.0422	.0382	
32,000	.0511	.....	
34,000	.0629	.....	
36,000	.0750	.....	
38,000	.0888	.....	
40,000	.1049	.0992	
42,000	.13	.....	
44,000	.15	.....	
46,000	.17	.....	
48,000	.20	.....	
50,000	.25	.....	
52,000	.32	.....	
52,800	.....	.....	Tensile strength.
0	.40	.....	= 13.3 per cent.

Elongation of inch sections, ".11, ".11, ".18\*.

Diameter at fracture, ".50; area, .1964 square inch.

Contraction of area, 21.4 per cent.

Fractured ".30 from the neck.

Appearance, dull, amorphous, in part granular.

No. 7572.

Transverse specimen.  
 Natural state.  
 Marks, C2-K.  
 Diameter, ".561.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0009	0.	
15,000	.0014	0.	Elastic limit.
16,000	.0020	.....	
17,000	.0027	.....	
18,000	.0039	.....	
19,000	.0050	.....	
20,000	.0071	.0049	
22,000	.0128	.....	
24,000	.0185	.....	
26,000	.0260	.....	
28,000	.0335	.....	
30,000	.0440	.0408	
32,000	.0555	.....	
34,000	.0633	.....	
36,000	.0755	.....	
38,000	.0912	.....	
40,000	.1072	.1018	
42,000	.13	.....	
44,000	.15	.....	
46,000	.17	.....	
48,000	.20	.....	
50,000	.25	.....	
52,000	.30	.....	
54,000	.39	.....	
54,400	.....	.....	Tensile strength.
0	.46	.....	= 15.3 per cent.

Elongation of inch sections, ".13, ".20\*, ".18.  
 Diameter at fracture, ".50; area, .1964 square inch.  
 Contraction of area, 21.4 per cent.  
 Fractured 1".3 from the neck.  
 Appearance, coarse granular.

H. Doc. 335—14

No. 7573.

Longitudinal specimen.  
 Natural state.  
 Marks, C2-M.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0009	0.	
15,000	.0016	0.	
16,000	.0018		
17,000	.0029		
18,000	.0039		
19,000	.0060		
20,000	.0070	.0048	
22,000	.0118		
24,000	.0180		
26,000	.0250		
28,000	.0380		
30,000	.0425	.0687	
32,000	.0519		
34,000	.0689		
36,000	.0773		
38,000	.0905		
40,000	.1083	.1086	
42,000	.13		
44,000	.15		
46,000	.18		
48,000	.22		
50,000	.26		
52,000	.33		
54,000	.46		Tensile strength. = 17 per cent.
0	.51		

Elongation of inch sections, ".18", ".18", ".15.

Diameter at fracture, ".49; area, .1886 square inch.

Contraction of area, 24.6 per cent.

Fractured 1".14 from the neck.

Appearance, dull, amorphous, in part granular.

No. 7574.

Longitudinal specimen.  
 Natural state.  
 Marks, C2-P.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	0.	
15,000	.0019	.0001	Elastic limit.
16,000	.0028	.....	
17,000	.0081	.....	
18,000	.0041	.....	
19,000	.0058	.....	
20,000	.0078	.0052	
22,000	.0120	.....	
24,000	.0195	.....	
26,000	.0273	.....	
28,000	.0848	.....	
30,000	.0429	.0890	
32,000	.0650	.....	
34,000	.0648	.....	
36,000	.0770	.....	
38,000	.0919	.....	
40,000	.1078	.1020	
42,000	.18	.....	
44,000	.15	.....	
46,000	.18	.....	
48,000	.21	.....	
50,000	.25	.....	
52,000	.31	.....	
58,400	.....	.....	Tensile strength.
0	.45	.....	= 15 per cent.

Elongation of inch sections, ".11, ".12, ".22\*.  
 Diameter at fracture, ".48; area, .1810 square inch.  
 Contraction of area, 27.6 per cent.  
 Fractured, ".25 from the neck.  
 Appearance, dull amorphous, oblique.

No. 7575.

Longitudinal specimen.  
 Natural state.  
 Marks, C2-R.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0011	0.	
15,000	.0018	.0001	
16,000	.0020	.....	Elastic limit.
17,000	.0021	.....	
18,000	.0028	.....	
19,000	.0039	.....	
20,000	.0069	.0087	
22,000	.0100	.....	
24,000	.0170	.....	
26,000	.0233	.....	
28,000	.0322	.....	
30,000	.0402	.0363	
32,000	.0500	.....	
34,000	.0605	.....	
36,000	.0710	.....	
38,000	.0845	.....	
40,000	.0980	.0929	
42,000	.12	.....	
44,000	.14	.....	
46,000	.16	.....	
48,000	.19	.....	
50,000	.22	.....	
52,000	.27	.....	
54,000	.33	.....	
55,280	.....	.....	Tensile strength.
0	.46	.....	= 15.3 per cent.

Defective specimen, spongy.  
 Elongation of inch sections, ".13, ".20\*, ".13.  
 Diameter at fracture, ".50; area, .1964 square inch.  
 Contraction of area, 21.4 per cent.  
 Fractured 1".5 from the neck.  
 Appearance, dull, amorphous, trace of granulation.



No. 7579.

Longitudinal specimen.  
 Heated full cherry and quenched in oil.  
 Marks, C2-Q.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0008	0.	
10,000	.0009	0.	
20,000	.0019	0.	
25,000	.0026	0.	
30,000	.0033	.0002	
35,000	.0042	.0006	
40,000	.0054	.0013	
45,000	.0070	.0022	
50,000	.0086	.0041	
52,000	.0110	.....	
54,000	.0120	.....	
56,000	.0165	.....	
58,000	.0220	.....	
60,000	.0279	.0210	
64,000	.04	.....	
68,000	.06	.....	
72,000	.08	.....	
76,000	.11	.....	
77,440	.....	.....	Tensile strength. =5.3 per cent.
0	.16	.....	

Elongation of inch sections, ".05, ".04, ".07\*.  
 Diameter at fracture, ".52; area, .2124 square inch.  
 Contraction of area, 15 per cent.  
 Fractured ".85 from the neck.  
 Appearance, dull, amorphous, contains a spot of granular metal.

No. 7578.

Longitudinal specimen.

Heated full cherry, quenched in oil, and annealed at about 1,000° F.

Marks, C2-E.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010		
20,000	.0020		
28,000	.....		Elastic limit, approximate.
30,000	.0041	.0010	
31,000	.0046		
32,000	.0050		
33,000	.0053		
34,000	.0056		
35,000	.0060	.0021	
36,000	.0067		
37,000	.0071		
38,000	.0078		
39,000	.0088		
40,000	.0100	.0055	
42,000	.0130		
44,000	.0198		
46,000	.0306		
48,000	.0460		
50,000	.0550	.0489	
52,000	.07		
56,000	.09		
60,000	.11		
64,000	.15		
68,000	.21		
68,080	.....		Tensile strength.
0	.28		=9.3 per cent.

Elongation of inch sections, ".16", ".05", ".07.

Diameter at fracture, ".49; area, .1886 square inch.

Contraction of area, 24.6 per cent.

Fractured ".25 from the neck.

Appearance, dull, amorphous, oblique.

No. 7582.

Transverse specimen.

Heated low yellow and quenched in oil.

Marks, C2-J.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
Pounds.	Inch.	Inch.	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0032	.0001	
35,000	.0040	.....	
40,000	.0046	.0002	
45,000	.0051	.....	
50,000	.0058	.0004	
55,000	.0069	.....	
60,000	.0260	.0189	
62,000	.0818	.....	
64,000	.0892	.....	
66,000	.0480	.....	
68,000	.0560	.....	
70,000	.0643	.0551	
72,000	.07	.....	
76,000	.10	.....	
80,000	.13	.....	
84,000	.17	.....	
85,000	.....	.....	Tensile strength.
0	.27	.....	= 9 per cent.

Elongation of inch sections, ".04, ".13\*, ".10.

Diameter at fracture, ".51; area, .2043 square inch.

Contraction of area, 18.3 per cent.

Fractured 1".14 from the neck.

Appearance, dull, amorphous, oblique.

No. 7584.

Longitudinal specimen.

Heated low yellow and quenched in oil.

Marks, C2-N.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0031	.0001	
35,000	.0037	.....	
40,000	.0043	.0001	
45,000	.0050	.0002	
50,000	.0058	.0004	
55,000	.0067	.0008	
56,000	.0069	.....	
57,000	.0072	.....	
58,000	.0120	.....	
59,000	.0171	.....	
60,000	.0230	.0158	
62,000	.0268	.....	
64,000	.0340	.....	
66,000	.0410	.....	
68,000	.0482	.....	
70,000	.0578	.0490	
72,000	.07	.....	
76,000	.09	.....	
80,000	.11	.....	
84,000	.15	.....	
86,400	.....	.....	Tensile strength.
0	.24	.....	= 8 per cent.

Elongation of inch sections, ".05, ".07, ".12\*.

Diameter at fracture, ".51; area, .2043 square inch.

Contraction of area, 18.3 per cent.

Fractured ".75 from the neck.

Appearance, dull, amorphous, irregular surface.

No. 7583.

Transverse specimen.

Heated low yellow, quenched in oil, and annealed at about 1,000° F.

Marks, C2-L.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0004	0.		
10,000	.0010	0.		
20,000	.0020	0.		
30,000	.0080	0.		
35,000	.0086	0.		
40,000	.0041	0.		
45,000	.0047	0.		
50,000	.0051	0.		
53,000	.0054	0.		
54,000	.0056	0.		Elastic limit. Load fell.
55,000	.0090	0.		
50,000	.0112	0.		
51,000	.0140	0.		
52,000	.0190	0.		
53,000	.0262	0.		
54,000	.0400	0.		
56,000	.0490	0.		
58,000	.0581	0.		
60,000	.0672	.0591		
64,000	.09	0.		
68,000	.11	0.		
72,000	.15	0.		
76,000	.23	0.		
77,200	.....	.....	Tenile strength.	
0	.35	.....	=11.7 per cent.	

Elongation of inch sections, ".08, ".07, ".20\*.

Diameter at fracture, ".48; area, .1810 square inch.

Contraction of area, 27.6 per cent.

Fractured ".7 from the neck.

Appearance, dull, amorphous, irregular surface.

No. 7585.

Longitudinal specimen.

Heated low yellow, quenched in oil, and annealed at about 1,000° F.

Marks, C2-O.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0009	.....	
20,000	.0019	.....	
30,000	.0029	0.	
35,000	.0034	.....	
40,000	.0040	0.	
45,000	.0044	.....	
50,000	.0050	0.	
55,000	.0053	.....	
50,000	.0125	.....	
51,000	.0170	.....	
52,000	.0360	.....	
53,000	.0400	.....	
54,000	.0448	.....	
56,000	.0522	.....	
58,000	.0620	.....	
60,000	.0706	.0628	
62,000	.0810	.....	
64,000	.0923	.....	Tensile strength. =11.7 per cent.
66,000	.1060	.....	
68,000	.1210	.....	
72,000	.16	.....	
76,000	.25	.....	
76,800	0	.....	
	.35	.....	

Elongation of inch sections, ".10, ".17\*, ".08.

Diameter at fracture, ".49; area, .1886 square inch.

Contraction of area, 24.6 per cent.

Fractured 1".37 from the neck.

Appearance, dull, amorphous, irregular surface.





PHOTOMICROGRAPH OF STEM OF TENSILE SPECIMEN C2-B, NO. 7576, CROSS SECTION,  
CARBON STEEL INGOT. MAGNIFICATION 180 DIAMETERS.  
STEEL HEATED BRIGHT YELLOW AND QUENCHED IN OIL.



No. 7576.

Longitudinal specimen.

Heated bright yellow and quenched in oil.

Marks, C2-B.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004		
10,000	.0010		
20,000	.0020		
30,000	.0033	.0001	
40,000	.0045	.0005	
45,000	.0054	.0009	
50,000	.0063	.0012	
55,000	.0079		
60,000	.0102	.0038	
65,000	.0140		
70,000	.0225	.0139	
75,000	.0333		
80,000	.0530	.0426	
84,000	.07		
88,000	.10		
92,000	.13		
98,040			Tensile strength. = 5.7 per cent.
0	.17		

Elongation of inch sections, ".04, ".04, ".09\*.

Diameter at fracture, ".52; area, .2124 square inch.

Contraction of area, 15 per cent.

Fractured ".8 from the neck.

Appearance, dull, amorphous, oblique.

No. 7580.

Transverse specimen.

Heated bright yellow and quenched in oil.

Marks, C2-G.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0002	0.	
10,000	.0008	.....	
20,000	.0019	.....	
30,000	.0030	0.	
35,000	.0037	.....	
40,000	.0043	.0002	
45,000	.0051	.0005	
50,000	.0060	.0009	
55,000	.0079	.....	
60,000	.0092	.0029	
65,000	.0120	.....	
70,000	.0210	.0130	
75,000	.0342	.....	
80,000	.0520	.0422	
84,000	.07	.....	
88,000	.09	.....	
92,000	.12	.....	
94,400	.....	.....	Tensile strength.
0	.16	.....	= 5.3 per cent.

Elongation of inch sections, ".07\*", ".07\*", ".02.

Diameter at fracture, ".54; area, .2290 square inch.

Contraction of area, 8.4 per cent.

Fractured 1".07 from the neck.

Appearance, fine granular, dull spot at the circumference.

No. 7577.

Longitudinal specimen.

Heated bright yellow, quenched in oil, and annealed at about 1,000° F.

Marks, C2-C.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0031	0.	
35,000	.0038	.....	
40,000	.0042	0.	
45,000	.0049	.....	
48,000	.0058	.....	Elastic limit.
49,000	.0063	.....	
50,000	.0061	.0029	
51,000	.0092	.....	
52,000	.0110	.....	
54,000	.0160	.....	
56,000	.0262	.....	
58,000	.0848	.....	
60,000	.0448	.0870	
64,000	.06	.....	
68,000	.09	.....	
72,000	.12	.....	
76,000	.18	.....	
76,490	.....	.....	Tensile strength.
0	.33	.....	= 11 per cent.

Elongation of inch sections, ".04, ".07, ".22\*.

Diameter at fracture, ".43; area, .1452 square inch.

Contraction of area, 41.9 per cent.

Fractured ".8 from the neck.

Appearance, dull, silky, oblique.

No. 7581.

Transverse specimen.  
 Heated bright yellow, quenched in oil, and annealed at about  
 1,000° F.  
 Marks, C2-I.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0004	0.		
10,000	.0010	.....		
20,000	.0020	.....		
30,000	.0030	0.		
35,000	.0036	.....		
40,000	.0041	0.		
45,000	.0047	.....		
50,000	.0062	.0001		
53,000	.0065	.....		
54,000	.0058	.....		Elastic limit.
55,000	.0114	.0054		
56,000	.0153	.....		
57,000	.0200	.....		
58,000	.0238	.....		
59,000	.0280	.....		
60,000	.0332	.0260		
62,000	.0388	.....		
64,000	.0490	.....		
66,000	.0580	.....		
68,000	.0663	.....		
72,000	.09	.....		
76,000	.12	.....		
80,000	.16	.....		
83,640	.....	.....	Tensile strength.	
0	.32	.....	= 10.7 per cent.	

Elongation of inch sections, ".10, ".15\*, ".07.  
 Diameter at fracture, ".49; area, .1886 square inch.  
 Contraction of area, 24.6 per cent.  
 Fractured 1".8 from the neck.  
 Appearance, dull, amorphous, oblique.

*t.*

*7, manganese .58.*


*quenching on the curves*

*not quenched in oil.*

*" " " "*

*" " " "*

*" IR*




manganese .58.

etching on the curves

oil, annealed at 1000° ± F.

" " " " "

" " " " "





TABLATION OF TENSION SPECIMENS FROM CARBON STEEL INGOT.

STEMS OF SPECIMENS ".564 DIAM., 3" LONG.

No. of test.	Direction of specimen.	Treatment.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation in 8 inches.	Contraction of area.	Elongation of inch sections.	Appearance of fracture.
			Pounds.	Pounds.	Per ct.	Per ct.	Inch.	
7568	Longitudinal.	Natural state	17,000	54,880	15.0	21.4	.13, .13, .19*	Dull, amorphous, oblique.
7569	do	do	16,000	53,120	14.3	21.4	.13, .13, .17*	Coarse granular, silvery luster.
7570	do	Natural state.	16,000	47,600	10.3	24.6	.06, .15*, .06	Dull, amorphous, oblique.
7571	Transverse	Defective specimen.	16,000	52,800	13.3	21.4	.11, .11, .18*	Dull, amorphous, in part granular.
7572	do	do	15,000	54,400	15.3	21.4	.13, .20*, .13	Coarse granular.
7573	Longitudinal.	do	16,000	54,000	17.0	24.6	.18*, .18, .15	Dull, amorphous, in part granular.
7574	do	do	15,000	53,400	15.0	27.6	.11, .12, .22*	Dull, amorphous, oblique.
7575	do	Natural state.	17,000	55,280	15.3	21.4	.13, .20*, .13	Dull, amorphous, trace of granulation.
7576	do	Heated full cherry and quenched in oil.	(b)	77,440	5.3	15.0	.06, .04, .07*	Dull, amorphous, granular spot.
7577	do	Heated full cherry, quenched in oil, and annealed at about 1,000° F.	(b)	68,080	9.3	24.6	.16*, .06, .07	Dull, amorphous, oblique.
7582	Transverse	Heated low yellow and quenched in oil	(b)	86,600	9.0	18.3	.04, .13*, .10	Do.
7584	Longitudinal.	do	(b)	86,400	8.0	18.3	.06, .07, .12*	Dull, amorphous, irregular surface.
7583	Transverse	Heated low yellow, quenched in oil, and annealed at about 1,000° F.	(b)	77,200	11.7	27.6	.08, .07, .20*	Do.
7596	Longitudinal.	do	53,000	76,800	11.7	24.6	.10, .17*, .08	Do.
7578	do	Heated bright yellow and quenched in oil.	(b)	98,040	5.7	15.0	.04, .04, .09*	Dull, amorphous, oblique.
7580	Transverse	do	(b)	94,400	5.3	8.4	.07*, .07*, .02	Fine granular, dull spot.
7577	Longitudinal.	Heated bright yellow, quenched in oil, and annealed at about 1,000° F.	(b)	76,480	11.0	41.9	.04, .07, .22*	Dull silky, oblique.
7581	Transverse	do	54,000	88,640	10.7	24.6	.10, .15*, .07	Dull, amorphous, oblique.

a Approximate.

b Indefinite.

## METAL FROM NICKEL STEEL INGOT, SLAB NO. 2.

No. 7516.

Longitudinal specimen.

Natural state.

Marks, N2-A.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0003	0.		
10,000	.0010	0.		
15,000	.0014	0.		
20,000	.0020	0.		
25,000	.0025	0.		
30,000	.0031	0.		
32,000	.0034	-----		Elastic limit.
33,000	.0039	-----		
34,000	.0041	-----		
35,000	.0052	-----		
36,000	.0057	-----		
37,000	.0064	-----		
38,000	.0073	-----		
39,000	.0088	-----		
40,000	.0123	.0079		
42,000	.0190	-----		
44,000	.0320	-----	Tensile strength. = 21.3 per cent.	
46,000	.0455	-----		
48,000	.0585	-----		
50,000	.0730	-----		
52,000	.08	-----		
54,000	.10	-----		
56,000	.13	-----		
58,000	.17	-----		
60,000	.20	-----		
62,000	.25	-----		
64,000	.32	-----		
66,000	.45	-----		
66,320	-----	-----		
0	.64	-----		

Elongation of inch sections, ".30", ".19", ".15.

Diameter at fracture, ".47; area, .1735 square inch.

Contraction of area, 30.6 per cent.

Fractured ".45 from the neck.

Appearance, dull leaden color, amorphous, trace of granulation.

No. 7517.

Longitudinal specimen.  
 Natural state.  
 Marks, N2-D.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	0.	
15,000	.0015	0.	
20,000	.0020	0.	
25,000	.0026	0.	
30,000	.0031	0.	
31,000	.0032	.....	Elastic limit (not well defined).
32,000	.0035	.....	
33,000	.0039	.....	
34,000	.0041	.....	
35,000	.0043	.0006	
36,000	.0050	.....	
37,000	.0054	.....	
38,000	.0066	.....	
39,000	.0078	.....	
40,000	.0101	.0056	
42,000	.0155	.....	
44,000	.0290	.....	
46,000	.0406	.....	
48,000	.0528	.....	
50,000	.0670	.0606	
52,000	.08	.....	
54,000	.10	.....	
56,000	.12	.....	
58,000	.15	.....	
60,000	.19	.....	
62,000	.28	.....	
64,000	.30	.....	
66,000	.49	.....	Tensile strength.
0	.60	.....	= 20 per cent.

Elongation of inch sections, ".16, ".17, ".27\*.  
 Diameter at fracture, ".45; area, .1590 square inch.  
 Contraction of area, 36.4 per cent.  
 Fractured 1".12 from the neck.  
 Appearance, dull silky, oblique, small, light-colored spots.

No. 7518.

Longitudinal specimen. Defective.

Natural state.

Marks, N2-F.

Diameter, ".564.

Sectional area, .25 square inches.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0010	0.	
15,000	.0015	0.	
20,000	.0021	0.	
25,000	.0023	.0001	Elastic limit.
26,000	.0033	.....	
27,000	.0033	.....	
28,000	.0042	.....	
29,000	.0049	.....	
30,000	.0059	.0020	
31,000	.0069	.....	
32,000	.0080	.....	
33,000	.0095	.....	
34,000	.0118	.....	
35,000	.0144	.0101	
36,000	.0172	.....	
37,000	.0198	.....	
38,000	.0247	.....	
39,000	.0290	.....	
40,000	.0406	.0351	
42,000	.06	.....	Tensile strength.
0	.11	.....	=3.7 per cent.

Elongation of inch sections, ".02, ".08\*, ".01.

Diameter at fracture, ".52; area, .2124 square inch.

Contraction of area, 15 per cent.

Fractured 1".4 from the neck, at group of blow holes.

Appearance, dull, amorphous.

No. 7519.

Transverse specimen.

Natural state.

Marks, N2-H.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0008	0.		
10,000	.0010	0.		
20,000	.0020	0.		
25,000	.0026	0.		
30,000	.0031	0.		
31,000	.0032	.....		
32,000	.0034	.....		Elastic limit.
33,000	.0037	.....		
34,000	.0040	.....		
35,000	.0043	.0007		
36,000	.0052	.....		
37,000	.0059	.....		
38,000	.0070	.....		
39,000	.0083	.....		
40,000	.0111	.0009		
42,000	.0130	.....		
44,000	.0236	.....		
46,000	.0436	.....		
48,000	.0540	.....		
50,000	.0693	.0029		
52,000	.08	.....		
54,000	.10	.....		
56,000	.12	.....		
58,000	.15	.....		
60,000	.19	.....		
62,000	.23	.....		
64,000	.30	.....		
66,000	.48	.....		
66,800	.....	.....	Tensile strength. = 20.5 per cent.	
0	.61	.....		

Elongation of inch sections, ".15, ".32\*, ".14.

Diameter at fracture, ".45; area, .1590 square inch.

Contraction of area, 36.4 per cent.

Fractured at the middle of the stem.

Appearance, dull, amorphous, flaky.

No. 7520.

Transverse specimen.  
 Natural state.  
 Marks, N2-K.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0010	0.	
20,000	.0020	0.	
25,000	.0026	0.	
30,000	.0031	0.	Elastic limit.
31,000	.0035	.....	
32,000	.0039	.....	
33,000	.0041	.....	
34,000	.0047	.....	
35,000	.0049	.0010	
36,000	.0053	.....	
37,000	.0060	.....	
38,000	.0078	.....	
39,000	.0091	.....	
40,000	.0126	.0081	
42,000	.0190	.....	
44,000	.0310	.....	
46,000	.0445	.....	
48,000	.0580	.....	
50,000	.0742	.0679	
52,000	.09	.....	
54,000	.11	.....	
56,000	.13	.....	
58,000	.17	.....	
60,000	.21	.....	
62,000	.26	.....	
63,600	.....	.....	Tensile strength.
0	.42	.....	= 14 per cent.

Elongation of inch sections, ".11, ".17\*, ".14.  
 Diameter at fracture, ".47; area, .1735 square inch.  
 Contraction of area, 30.6 per cent.  
 Fractured 1".2 from the neck.  
 Appearance, dull silky. Band of light-colored metal across fractured surface.

No. 7521.

Longitudinal specimen.  
 Natural state.  
 Marks, N2-M.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0004	0.		
10,000	.0010	0.		
20,000	.0021	0.		
25,000	.0027	0.		
30,000	.0038	.0001		
34,000	.0037	.....		
35,000	.0052	.0012		Elastic limit.
36,000	.0060	.....		
37,000	.0070	.....		
38,000	.0079	.....		
39,000	.0096	.....		
40,000	.0137	.0092		
42,000	.0223	.....		
44,000	.0330	.....		
46,000	.0433	.....		
48,000	.0650	.....		
50,000	.0713	.0649	Tensile strength. =6.3 per cent.	
52,000	.09	.....		
54,000	.11	.....		
56,000	.13	.....		
58,000	.17	.....		
58,800	.....	.....		
0	.19	.....		

Elongation of inch sections, ".05, ".09\*, ".05.

Diameter at fracture, ".54; area, .2290 square inch..

Contraction of area, 8.4 per cent.

Fractured 1".4 from the neck.

Appearance, granular 80 per cent, amorphous, flaky, 20 per cent.

No. 7522.

Longitudinal specimen.  
 Natural state.  
 Marks, N2-P.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads, per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Each.</i>	<i>Each.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	0.	
20,000	.0020	0.	
25,000	.0026	0.	
30,000	.0033	.0001	Elastic limit.
31,000	.0035	.....	
32,000	.0041	.....	
33,000	.0044	.....	
34,000	.0049	.....	
35,000	.0056	.0017	
36,000	.0067	.....	
37,000	.0074	.....	
38,000	.0089	.....	
39,000	.0102	.....	
40,000	.0150	.0102	
42,000	.0240	.....	
44,000	.0340	.....	
46,000	.0465	.....	
48,000	.0610	.....	
50,000	.0866	.0601	Tensile strength.
50,400	.....	.....	= 4.7 per cent.
0	.14	.....	

Elongation of inch sections, ".03, ".09\*, ".02.

Diameter at fracture, ".53; area, .2206 square inch.

Contraction of area, 11.8 per cent.

Fractured 1".4 from the neck.

Appearance, granular, 60 per cent; belts of light and dark colored amorphous metal, 40 per cent.





NO. 7520, N2-K.



NO. 7522, N2-P.

FRACTURED ENDS OF TENSILE SPECIMENS FROM NICKEL STEEL INGOT.



No. 7532.

Longitudinal specimen.  
 Heated full cherry and quenched in oil.  
 Marks, N2-Q.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0084	.0002	
35,000	.0043	.....	
40,000	.0062	.0010	
45,000	.0061	.....	
50,000	.0071	.0019	
55,000	.0082	.....	
60,000	.0098	.0080	
65,000	.0111	.....	
70,000	.0131	.0061	
75,000	.0152	.....	
80,000	.0184	.0091	
85,000	.0225	.....	
90,000	.0282	.0172	
95,000	.0338	.....	
100,000	.0435	.0309	
104,000	.05	.....	
108,000	.07	.....	
112,000	.09	.....	
115,200	.....	.....	Tensile strength. = 4.3 per cent.
0	.13	.....	

Elastic limit indefinite.

Elongation of inch sections, ".03, ".07\*, ".08.

Diameter at fracture, ".53; area, .2206 square inch.

Contraction of area, 11.8 per cent.

Fractured 1".3 from the neck.

Appearance, dull silky, coarsely serrated. Two minute discolored spots at circumference.

No. 7525.

Longitudinal specimen.

Heated full cherry, quenched in oil, and annealed at  $1,000^{\circ} \pm F$ .

Marks, N2-E.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3":

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0032	0.	
35,000	.0037	.....	
40,000	.0043	0.	
50,000	.0053	0.	
60,000	.0068	0.	
70,000	.0078	0.	
76,000	.0086	.....	Elastic limit about 75,000 pounds per square inch.
78,000	.0092	.....	
80,000	.0100	.0014	
81,000	.0110	.....	
82,000	.0120	.....	
83,000	.0132	.....	
84,000	.0160	.....	
85,000	.0181	.....	
86,000	.0215	.....	
88,000	.0250	.....	
90,000	.0318	.0407	
92,000	.07	.....	Tensile strength. = 12.3 per cent.
96,000	.11	.....	
100,000	.19	.....	
101,200	.....	.....	
0	.37	.....	

Elongation of inch sections, ".04, ".10, ".23\*.

Diameter at fracture, ".41; area, .1320 square inch.

Contraction of area, 47.2 per cent.

Fractured ".5 from the neck.

Appearance, dull silky, oblique.

No. 7533.

Longitudinal specimen.

Heated full cherry, quenched in oil, and annealed at  $1,000^{\circ} \pm F$ .

Marks, N2-R.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0009	.....	
20,000	.0020	.....	
30,000	.0080	0.	
40,000	.0041	0.	
50,000	.0051	0.	
60,000	.0061	0.	
68,000	.0071	.....	
69,000	.0090	.....	
68,000	.0112	.....	
69,000	.0150	.....	
69,000	.0188	.....	
70,000	.0230	.0150	
72,000	.0272	.....	
74,000	.0332	.....	
76,000	.0475	.....	
78,000	.0608	.....	
80,000	.0726	.0620	
84,000	.12	.....	Tensile strength. = 10.7 per cent.
88,000	.18	.....	
89,600	.....	.....	
0	.32	.....	

Elongation of inch sections, ".04, ".05, ".23\*.

Diameter at fracture, ".46; area, .1662 square inch.

Contraction of area, 33.5 per cent.

Fractured ".2 from the neck. Appearance, dull silky; oblique, pitted surface.

No. 7528.

Transverse specimen.  
 Heated low yellow and quenched in oil.  
 Marks, N2-J.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0086	.0008	
35,000	.0044	.0007	
40,000	.0050	.0009	
45,000	.0058	.0010	
50,000	.0068	.0012	
55,000	.0077	.0016	
60,000	.0089	.0020	
65,000	.0099	.0025	
70,000	.0111	.0032	
75,000	.0128	.0040	
80,000	.0140	.0050	
85,000	.0160	.0061	
90,000	.0187	.0080	
95,000	.0215	.0100	
100,000	.0251	.0135	
105,000	.0299	.0171	
110,000	.0881	.0246	
110,400	.....	.....	Tensile strength.
0	.06	.....	= 2 per cent.

Elastic limit indefinite.

Elongation of inch sections, ".01, ".01, ".04\*.

Diameter at fracture, ".55; area, .2376 square inches.

Contraction of area, 5 per cent.

Fractured 1" from the neck.

Appearance, granular; streaks of light-colored metal across fractured surface.

No. 7530.

Longitudinal specimen.

Heated low yellow and quenched in oil.

Marks, N2-N.

Diameter, ".564.

Sectional area, ".25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0010	-----	
20,000	.0022	-----	
30,000	.0038	.0002	
35,000	.0048	.0008	
40,000	.0051	.0007	
45,000	.0060	.0009	
50,000	.0069	.0012	
55,000	.0078	.0015	
60,000	.0087	.0019	
65,000	.0096	.0021	
70,000	.0107	.0029	
75,000	.0119	.0034	
80,000	.0133	.0042	
85,000	.0149	.0050	
90,000	.0168	.0065	
95,000	.0192	.0081	
0	.06	-----	

Elastic limit indefinite.

Elongation of inch sections, ".04\*", ".00, ".01.

Diameter at fracture, ".55; area, .2376 square inch.

Contraction of area, 5 per cent.

Fractured ".75 from the neck.

Appearance, dull silky, trace of granulation.

Defective specimen. A crack ".08 deep with dark-colored walls existed in the stem at the place of fracture. The discoloration was attributed to the operation of heating.

No. 7529.

Transverse specimen.

Heated low yellow, quenched in oil, and annealed at  $1,000^{\circ} \pm F.$ 

Marks, N2-L.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	0.	
20,000	.0021	0.	
30,000	.0032	0.	
35,000	.0037	0.	
40,000	.0042	0.	
50,000	.0054	0.	
60,000	.0066	0.	
70,000	.0077	.0001	Elastic limit.
75,000	.0086	.....	
76,000	.0092	.....	
77,000	.0120	.....	
78,000	.0175	.....	
79,000	.0228	.....	
80,000	.0300	.0201	
82,000	.0378	.....	
84,000	.0540	.....	
86,000	.0665	.....	
88,000	.0810	.....	
90,000	.1060	.0928	
92,000	.12	.....	Tensile strength.
93,680	.....	.....	=7 per cent.
0	.21	.....	

Elongation of inch sections, ".05, ".11\*, ".05.

Diameter at fracture, ".52; area, .2124 square inch.

Contraction of area, 15 per cent.

Fractured 1".48 from the neck.

Appearance, dull silky, oblique. Streak of light-colored metal across fractured surface.



No. 7531.

Longitudinal specimen.

Heated low yellow, quenched in oil, and annealed at  $1,000^{\circ} \pm F$ .

Marks, N2-O.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0009	.....	
20,000	.0020	.....	
30,000	.0031	0.	
35,000	.0037	.....	
40,000	.0042	0.	
45,000	.0049	.....	
50,000	.0054	0.	
55,000	.0060	.....	
60,000	.0067	0.	Elastic limit.
65,000	.0076	.0002	
66,000	.1080	.....	
67,000	.0085	.....	
68,000	.0094	.....	
69,000	.0108	.....	Tensile strength. =1.7 per cent.
70,000	.0147	.0058	
71,200	.....	.....	
0	.05	.....	

Elongations of inch sections, ".00, ".01, ".04\*.

Diameter at fracture, ".54; area, .2290 square inch.

Contraction of area, 8.4 per cent.

Fractured ".65 from the neck.

Appearance, dull gray, amorphous in part, with streak of light-colored metal.

Defective specimen. Crack with discolored walls  $\frac{1}{8}$ " by  $\frac{3}{8}$ ".

No. 7523.

Longitudinal specimen.  
 Heated bright yellow and quenched in oil.  
 Marks, N2-B.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0032	.0001	
35,000	.0039	.0001	
40,000	.0046	.0002	
45,000	.0058	.0004	
50,000	.0060	.0008	
55,000	.0068	.0009	
60,000	.0076	.0011	
65,000	.0084	.0014	
70,000	.0096	.0019	
75,000	.0108	.0021	
80,000	.0113	.0023	
104,000	.02	.....	Tensile strength. = 5 per cent.
120,000	.08	.....	
132,000	.04	.....	
140,000	.05	.....	
144,000	.07	.....	
148,000	.10	.....	
151,200	.....	.....	
0	.15	.....	

Elastic limit indefinite.  
 Elongation of inch sections, ".05, ".07\*, ".03.  
 Diameter at fracture, ".52; area, .2124 square inch.  
 Contraction of area, 15 per cent.  
 Fractured 1".3 from the neck.  
 Appearance, granular, cup-shaped.

No. 7526.

Transverse specimen.  
 Heated bright yellow, quenched in oil.  
 Marks, N2-G.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0010		
20,000	.0022		
30,000	.0084	.0001	
40,000	.0048	.0004	
50,000	.0061	.0008	
55,000	.0070	.0010	
60,000	.0078	.0011	
65,000	.0085	.0015	
70,000	.0094	.0018	
75,000	.0102	.0021	
80,000	.0112	.0026	
85,000	.0122	.0030	
90,000	.0157	.0039	
95,000	.0147	.0042	
100,000	.0165	.0061	
105,000	.0176	.0061	
110,000	.0197	.0076	
115,000	.0218	.0090	
120,000	.0240	.0106	
125,000	.0270	.0130	
130,000	.0304	.0158	
140,000	.04		
150,000	.06		
156,800			Tensile strength.
0	.12		=4 per cent.

Elastic limit indefinite.  
 Elongation of inch sections, ".02, ".02, ".08\*.  
 Diameter at fracture, ".52; area, .2124 square inch.  
 Contraction of area, 15 per cent.  
 Fractured ".2 from the neck. Appearance, dull gray, slightly granular. General surface close approach to silky.

No. 7524.

Longitudinal specimen.

Heated bright yellow, quenched in oil, and annealed at  $1,000^{\circ} \pm F$ .

Marks, N2-C.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	0.	
40,000	.0040	0.	
50,000	.0051	0.	
60,000	.0061	0.	
70,000	.0071	0.	
72,000	.0074	.....	
74,000	.0077	.....	Elastic limit.
72,000	.0119	.....	Load fell.
73,000	.0134	.....	
74,000	.0170	.....	
75,000	.0198	.....	
76,000	.0290	.....	
78,000	.0389	.....	
80,000	.0510	.0408	
82,000	.0580	.....	
84,000	.0742	.....	
88,000	.11	.....	
92,000	.16	.....	
95,000	.....	.....	Tensile strength
0	.43	.....	=14.3 per cent.

Elongation of inch sections, ".30\*", ".08, ".05.

Diameter at fracture, ".41; area, .1320 square inch.

Contraction of area, 47.2 per cent.

Fractured ".75 from the neck. Appearance, dull gray amorphous, oblique. Coarsely serrated.

No. 7527.

Transverse specimen.

Heated bright yellow, quenched in oil, and annealed at  $1,000^{\circ} \pm F$ .

Marks, N2-1.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0081	0.	
40,000	.0048	0.	
50,000	.0068	.....	
60,000	.0065	0.	
70,000	.0076	0.	
73,000	.0078	.....	
74,000	.0081	.....	Elastic limit.
75,000	.0148	.....	
76,000	.0178	.....	
78,000	.0845	.....	
80,000	.0470	.0870	
84,000	.08	.....	Tensile strength. =19 per cent.
88,000	.12	.....	
92,000	.18	.....	
94,400	.....	.....	
0	.57	.....	

Elongation of inch sections, ".36\*", ".13, ".08.

Diameter at fracture, ".37; area, .1075 square inch.

Contraction of area, 57 per cent.

Fractured ".95 from the neck. Appearance, silky. Surface contains several light-colored spots.

H. Doc. 335—16

TABULATION OF TENSION SPECIMENS FROM NICKEL STEEL INGOT.

STEMS OF SPECIMENS, 1/2 INCH DIAMETER, 3 INCH LONG.

No. of test.	Direction of specimen.	Treatment.	Elastic limit per square inch.	Tensile strength per square inch.	Elongation in 3".	Contraction of area.	Elongation of inch sections.	Appearance of fracture.
7516	Longitudinal.	Natural state.	Pounds. 32,000	Pounds. 66,320	Per ct. 21.3	Per ct. 30.6	" " " .30*, .19, .15	Dull-lead color; amorphous traces of granulation.
7517	do	do	a 31,000	66,000	20.0	36.4	.16, .17, .27*	Dull silky, oblique; small, light-colored spots.
7518	do	do	25,000	42,000	3.7	15.0	.02, .08*, .01	Dull, amorphous; group of blow holes.
7519	Transverse	Defective specimen	32,000	66,800	30.3	36.4	.15, .32*, .14	Dull, amorphous, flaky.
7520	do	Natural state.	30,000	63,600	14.0	30.6	.11, .17*, .14	Dull silky, with band of light-colored metal.
7521	do	do	34,000	58,800	6.3	8.4	.05, .09*, .06	Granular, 80 per cent; amorphous, flaky, 20 per cent.
7522	do	do	30,000	50,400	4.7	11.8	.03, .08*, .02	Granular, 60 per cent; belts of light and dark colored amorphous metal, 40 per cent.
7523	do	Heated full cherry and quenched in oil.	(b)	115,200	4.3	11.8	.08, .07*, .03	Dull silky, coarsely serrated.
7525	do	Heated full cherry, quenched in oil, and annealed at 1,000° ± F.	a 75,000	101,200	12.3	47.2	.04, .10, .23*	Dull silky; oblique.
7526	do	do	(b)	89,600	10.7	33.5	.04, .05, .23*	Dull silky, oblique; pitted surface.
7527	do	Heated low yellow and quenched in oil.	(b)	110,400	9.0	5.0	.01, .01, .04*	Granular; with streaks of light-colored metal.
7528	do	Heated low yellow and quenched in oil. Defective specimen.	(b)	98,000	1.7	5.0	.04*, .00, .01	Dull silky, trace of granulation.
7529	Transverse	Heated low yellow, quenched in oil, and annealed in oil.	75,000	98,680	7.0	15.0	.05, .11*, .05	Dull silky, oblique, with streak of light-colored metal.
7531	Longitudinal.	Heated low yellow, quenched in oil, and annealed at 1,000° ± F.	65,000	71,200	1.7	8.4	.00, .01, .04*	Dull gray; amorphous in part, with streak of light-colored metal.
7532	do	do	(b)	151,200	5.0	15.0	.05, .07*, .03	Granular, cup-shaped.
7528	do	Heated bright yellow and quenched in oil.	(b)	156,800	4.0	15.0	.02, .02, .08*	Dull gray, slightly granular; general surface close approach to silky.
7524	Longitudinal.	Heated bright yellow, quenched in oil, and annealed at 1,000° ± F.	74,000	95,000	14.3	47.2	.30*, .08, .05	Dull gray, amorphous, oblique, coarsely serrated.
7527	Transverse	Heated bright yellow, quenched in oil, and annealed at 1,000° ± F.	74,000	94,400	19.0	57.0	.36*, .13, .08	SILKY; several light-colored spots.

a Approximate.

b Indefinite.

got.

manganese .68, nickel 3.25.

and quenching on the

quenched in oil.

" " "

" " "

0 11 12 13 14 15






it.

ganese .68, nickel 3.25.

anching on the curves of

oil, untreated at  $1000^{\circ} \pm 1^{\circ}$ .

"	"	"	"	"
"	"	"	"	"



## CARBON STEEL INGOT.

Specimens from Block B4", piece *a*. Metal drawn down at a welding heat in the forge shop to a bar about 1".5 diameter by 48" long, from which tensile specimens were taken.

No. 7471.

Marks, Carbon B4-a1.

Diameter, 1".129.

Sectional area, 1.00 square inch.

Length of stem, 18".

Gauged length, 10".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0014	0.	
10,000	.0080	.....	Elastic limit.
20,000	.0083	0.	
30,000	.0098	.0001	
35,000	.0118	.0002	
36,000	.0120	.....	
37,000	.0640	.....	
38,000	.0720	.....	
39,000	.0850	.....	
40,000	.1850	.....	
41,000	.2050	.....	
42,000	.2140	.....	
43,000	.2250	.....	
44,000	.2400	.....	
45,000	.2620	.....	
46,000	.2800	.....	
47,000	.3000	.....	
48,000	.3200	.....	
49,000	.3450	.....	
50,000	.3650	.....	
1,000	.....	.3456	Rested 1 hour.
1,000	.35	.....	
55,000	.54	.....	
60,000	.88	.....	
64,700	.....	.....	Tensile strength. = 84.3 per cent.
0	2.48	.....	

Elongation of inch sections, ".20, ".21, ".21, ".18, ".19, ".19, ".19, ".18, ".20, ".40\*, ".30, ".21, ".20, ".21, ".19, ".17.

Diameter at fracture, ".88; area, .6082 square inch.

Contraction of area, 39.2 per cent.

Appearance of fracture, silky, containing a seam about ".15 deep near the circumference.

No. 7472.

Marks, Carbon B4-a2.

Diameter, 1".129.

Sectional area, 1.00 square inch.

Length of stem, 18".

Gauged length, 10".

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0014	0.	
10,000	.0082	.....	
20,000	.0066	.....	
30,000	.0100	0.	
35,000	.0115	.0001	
40,000	.0182	.0001	
41,000	.0185	.....	
42,000	.2500	.....	
43,000	.2640	.....	
44,000	.2800	.....	
45,000	.3000	.....	
46,000	.3210	.....	
47,000	.3450	.....	
48,000	.3610	.....	
49,000	.3815	.....	
50,000	.5075	.....	
1,000	.....	.4052	Elastic limit.
1,000	.42	.....	
55,000	.55	.....	
60,000	1.07	.....	
62,400	.....	.....	Rested 1 hour.
0	3.86	.....	
			Tensile strength. = 33.6 per cent.

Elongation of inch sections, ".12, ".13, ".17, ".18, ".19, ".19, ".17, ".18, ".17, ".18, ".19, ".18, ".21, ".19, ".40, ".51".

Diameter at fracture, ".78; area, .4778 square inch.

Contraction of area, 52.2 per cent.

Appearance of fracture, silky, containing a seam about ".40 deep.

#### BENDING TEST.

Specimen from Block B4, piece *b*, was drawn out under the hammer to a bar 28".75 long, and which finished 1".62 by 1".75 in cross-section dimensions. This bar was bent cold through 180 degrees and closed down without rupture. Minute longitudinal lines, dark in color, appeared on the tension side of the bend.

---

---

**STEEL SUSPENDER RODS FROM NEW YORK  
AND BROOKLYN BRIDGE.**

---

---



STEEL SUSPENDER RODS FROM THE NEW YORK AND BROOKLYN BRIDGE.

Tests having reference to the strength of suspender rods, seven of which in the bridge were found broken July 24, 1901.

Elongations and sets determined during the progress of the tests were by means of observations made upon the movable head of the testing machine.

The rods were pulled by attaching special fixtures to a pin passing through the eye at the head of the rod at one end and pulling against the nut on the opposite end, thus applying loads in the same manner direct tensile stresses would be received by the rods in place in the bridge.

The attachment employed to secure the rods to the testing machine rendered the test pieces inaccessible at the time.

Incipient cracks at the roots of the threads in the old rods, Nos. 4, 5, 6, and 8, were developed by the tests. The cracks extended around part of the circumference of the rods, but were generally located at the extremities of the diameter which was parallel to the axis of the bridge. These cracks were seldom found on the sides of the rods taken crosswise the direction of the length of the bridge. Their disposition is regarded as significant with reference to explaining the causes which contributed to the failure in service of some of the rods by indicating the direction in which the overstraining forces acted.

The direct tensile stress on the suspender rods in service, under normal conditions of loading, is stated to be 11 tons.

ROD NO. 1, WITH NEW WELDED END

Diameter of body, 2½".

Sectional area, 4.9 square inches.

Gauged length over thread, 12".43.

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
Pounds.	Inch.	Inch.	Initial load.
1,000	0.	0.	
50,000	.08	.08	
75,000	.11	.04	
100,000	.14	.07	
122,100	.21	.13	
125,000	.30	.....	
145,000	.31	.....	
			Tensile strength = 29,600 pounds per square inch on body of rod.

Fractured through the head in front of the pin hole.

Appearance, granular, radiating from the seamy spot at outside of the head.

Elongation on gauged length over thread, ".17.

Elongation on gauged length over head, ".08.

Elongation of pin hole, ".09.

## ROD NO. 2, WITH NEW WELDED END.

Diameter of body,  $2\frac{1}{8}$ ".

Sectional area, 4.9 square inches.

Gauged length over thread, 12".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load
50,000	.07	.01	
75,000	.10	.02	
100,000	.12	.14	
125,000	.18	.10	Set on gauged length over thread, ".03
126,000	.21	.13	Set on gauged length over thread, ".08.
150,000	.39	.30	Set on gauged length over thread, ".19.
160,000	.50	.....	
195,800	.....	.....	Tensile strength=40,000 pounds per square inch on body of rod.

Fractured through the head in front of the pin hole.

Appearance, granular.

Elongation on gauged length over thread, ".62.

Elongation on gauged length over head, ".16.

Elongation of pin hole, ".15.

## ROD NO. 3, WITH NEW WELDED END.

Diameter of body,  $2\frac{1}{8}$ ".

Sectional area, 4.9 square inches.

Gauged length over thread, 12".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
25,000	.05	.03	
50,000	.08	.04	
75,000	.10	.04	
100,000	.12	.05	
125,000	.14	.06	Set on gauged length over thread, ".01.
128,700	.16	.09	Set on gauged length over thread, ".04.
140,000	.26	.....	
150,000	.31	.22	Set on gauged length over thread, ".16.
160,000	.39	.....	
164,800	.....	.....	Tensile strength=33,500 pounds per square inch on body of rod.

Fractured through the head in front of the pin hole.

Appearance, granular, radiating from a seamy spot at the corner of the fractured surface, outside of head.

Elongation on gauged length over thread, ".24.

Elongation on gauged length over head, ".11.

Elongation of pin hole, ".13.



ROD No. 4. OLD ROD WHICH HAD BEEN HEATED AT THREADED END.

Diameter of body,  $2\frac{3}{8}$ ".

Sectional area, 5.15 square inches.

Gauged length over thread, 18".50.

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load
25,000	.07	.03	
50,000	.12	.05	
75,000	.15	.07	
100,000	.18	.08	
125,000	.21	.11	Set on gauged length over thread, ".02.
150,000	.25	.14	Set on gauged length over thread, ".03.
160,000	.28		
162,000	.30	.19	Set on gauged length over thread, ".06.
175,000	.34	.23	Set on gauged length over thread, ".09.
200,000	.54	.41	Set on gauged length over thread, ".14.
225,000	.76		
250,000	1.05		
272,600			Tensile strength = 52,900 pounds per square inch on body of rod.

Fractured through the head in front of pin hole.

Appearance, granular, seamy metal at corner at outside of the head. Opened cracks at root of thread immediately below the most worn part. These cracks presented dark-colored surfaces, and were evidently the development of incipient cracks which began when the rod was in the bridge, and discolored when the rod was subsequently heated in a smith's fire. The cracks were on opposite sides of the rod, about 30 degrees from a diameter parallel to the axis of the bridge.

Elongation on gauged length over thread, ".65.

Elongation on gauged length over head, ".35.

Elongation of pin hole, ".34.

## ROD No. 5. OLD ROD WHICH HAD BEEN HEATED AT THREADED END.

Diameter of body,  $2\frac{1}{4}$ ".

Sectional area, 4.9 square inches.

Gauged length over thread, 19".50.

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
50,000	.06	.02	
75,000	.08	.08	
100,000	.12	.05	
125,000	.16	.07	
150,000	.22	.12	Set on gauged length over thread, ".08.
160,000	.28		
161,200	.29	.19	Set on gauged length over thread, ".07.
175,000	.34	.23	
200,000	.57	.44	Set on gauged length over thread, ".24.
225,000	.80		
250,000	1.12		
257,000			Tensile strength=52,400 pounds per square inch on body of rod.

Fractured in the threaded section, 12" from the end of the rod.

Appearance, granular, with dark-colored spots at the circumference, extending inward varying distances up to  $\frac{1}{8}$ ". Opened cracks at the root of the thread in the vicinity of the fracture, which were located at different places on the circumference of the rod, excepting the sides at right angles to the axis of the bridge, in which parts the cracks were seldom present. These cracks, like those in the rod No. 4, apparently represent progressive fractures which were in progress in the bridge, the surfaces of which were discolored when the rod was subsequently exposed to the heat of the smith's fire.

Elongation on gauged length over thread, ".69.

Elongation on gauged length over head, ".12.

Elongation of pin hole, ".12.

ROD No. 6. OLD ROD WHICH HAD BEEN HEATED AT THREADED END.

Diameter of body,  $2\frac{3}{8}$ "  
 Sectional area, 5.15 square inches.  
 Gauged length over thread, 21".  
 Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
25,000	.06	.02	
50,000	.10	.04	
75,000	.12	.05	
100,000	.15	.06	
125,000	.18	.08	Set on gauged length over thread, ".01.
150,000	.25	.16	Set on gauged length over thread, ".05.
160,000	.28		
161,600	.34	.22	Set on gauged length over thread, ".10.
175,000	.41	.28	
200,000	.61	.47	Set on gauged length over thread, ".30.
225,000	.86		
248,300	.....	.....	Tensile strength=48,200 pounds per square inch on body of rod.

Fractured 13".25 from end of rod.

Appearance, granular, with dark-colored spots at the circumference, penetrating varying distances up to ".15.

Elongation on gauged length over thread, ".74.

Elongation on gauged length over head, ".12.

Elongation of pin hole, ".13.

## ROD No. 7. OLD ROD WHICH HAD BEEN HEATED AT THREADED END.

Diameter of body,  $2\frac{1}{4}$ ".

Sectional area, 4.9 square inches.

Gauged length over thread, 21".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load
25,000	.10	.04	
50,000	.14	.06	
75,000	.18	.07	
100,000	.21	.09	
125,000	.28	.10	
150,000	.28	.15	Set on gauged length over thread, 0".
175,000	.37	.24	Set on gauged length over thread, ".07.
195,400	.52	.37	Set on gauged length over thread, ".17.
200,000	.57	.41	Set on gauged length over thread, ".19.
225,000	.80	.....	
250,000	1.13	.92	Set on gauged length over thread, ".49.
318,600	.....	.....	Tensile strength = 65,000 pounds per square inch on body of rod.

Fractured 12" from the end of the rod, near the upper end and most reduced part of the worn section.

Appearance, granular. No cracks opened at the root of the thread.

Elongation on gauged length over thread, 2".05.

Elongation on gauged length over head, ".30.

Elongation of pin hole, ".35.

## ROD No. 8. OLD ROD WHICH HAD BEEN HEATED AT THREADED END.

Diameter of body,  $2\frac{1}{8}$ ".

Sectional area, 5.15 square inches.

Gauged length over thread, 16".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
25,000	.04	.02	
50,000	.07	.02	
75,000	.10	.03	
100,000	.12	.04	
125,000	.15	.05	Set on gauged length over thread, ".01.
150,000	.18	.08	Set on gauged length over thread, ".03.
175,000	.26	.15	Set on gauged length over thread, ".08.
186,300	.33	.21	Set on gauged length over thread, ".12.
200,000	.41	.28	Set on gauged length over thread, ".17.
225,000	.58	.....	
250,000	.81	.64	Set on gauged length over thread, ".42.
284,900	.....	.....	Tensile strength=55,300 pounds per square inch on body of rod.

Fractured 11".75 from end of rod.

Appearance, granular, radiating from a dark-colored spot at the circumference. Cracks with dark-colored surfaces developed at the roots of the threads in the vicinity of the fracture. These cracks were of the same description as those found in other rods. They were generally located in and near the plane of the diameter of the rod which was parallel to the axis of the bridge. There were no cracks opened in the threads at right angles to the axis of the bridge. It is understood in this connection that the axes of the pins through the heads of the rods occupied a position in the bridge at right angles to the direction of the length of the bridge. A number of these cracks were visible after 250,000 pounds tension had been applied to the rod.

Elongation on gauged length over thread, ".81.

Elongation on gauged length over head, ".15.

Elongation of pin hole, ".15.

## ROD No. 10. NEW ROD.

Diameter of body, 2 $\frac{1}{4}$ ".

Sectional area, 5.94 square inches.

Gauged length over thread, 8".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
25,000	.06	.08	
50,000	.10	.05	
75,000	.13	.06	
100,000	.16	.07	
125,000	.18	.08	
150,000	.21	.09	
175,000	.24	.10	
200,000	.27	.12	
225,000	.32	.15	Set on gauged length over thread, 0".
242,700	.36	.19	Set on gauged length over thread, ".02.
245,000	.39	.21	Set on gauged length over thread, ".02.
250,000	.41	.....	
275,000	.48	.28	Set on gauged length over thread, ".04.
300,000	.65	.43	Set on gauged length over thread, ".08.
325,000	.87	.61	Set on gauged length over thread, ".11.
375,000	1.27	.96	Set on gauged length over thread, ".18.
448,000	.....	.....	Tensile strength=74,600 pounds per square inch on body of rod.

Fractured at the thread, 7".75 from the end of the rod.

Appearance, granular.

Elongation on gauged length over thread, ".47.

Elongation on gauged length over head, ".46.

Elongation of pin hole, ".43.

ROD No. 11. NEW ROD

Diameter of body, 2 $\frac{3}{4}$ ".

Sectional area, 5.94 square inches.

Gauged length over thread, 8".

Gauged length over head, 5".

The elongations tabulated below refer to measurements taken on the moving parts of the testing machine.

Applied loads.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
25,000	.06	.02	
50,000	.06	.03	
75,000	.11	.04	
100,000	.13	.04	
125,000	.15	.05	
150,000	.17	.05	
175,000	.20	.06	
200,000	.23	.08	
225,000	.26	.10	
250,000	.30	.12	Set on gauged length over thread, ".0.
258,600	.33	.15	Set on gauged length over thread, ".02.
255,000	.35	.17	Set on gauged length over thread, ".03.
275,000	.40	.20	Set on gauged length over thread, ".06.
300,000	.49	.29	Set on gauged length over thread, ".06.
335,200			Tensile strength=56,400 pounds per square inch on body of rod.

Fractured in the head, across the pin hole.

Appearance, granular, radiating from the corner of the fractured surfaces.

Elongation on gauged length over thread, ".12.

Elongation on gauged length over head, ".19.

Elongation of pin hole, ".17.

TENSILE TESTS OF SPECIMENS TURNED DOWN FROM BODIES OF SUSPENDER RODS, TAKEN OUT AFTER THE TESTS OF THE FULL-SIZED MEMBERS.

No. of rod.	Diameter.	Sectional area.	Tensile strength.		Elongation in 3" or 6"		Contraction of area.	Elongation of inch sections.	Appearance of fractures.
			Total.	Per square inch.	Inches.	Per cent.			
5	Inches. 1.129	Sq. in. 1.00	Pounds. 82,300	Pounds. 82,300	Inches. 1.06	Per cent. 17.5	Per cent. 43.3	"06, ".08, ".10, ".18, ".47*	Fibrous, cup shaped.
6	1.129	1.00	82,300	82,300	1.00	16.7	40.6	"04, ".06, ".10, ".17, ".35*	Do.
7	1.129	1.00	82,300	82,300	1.00	10.0	47.7	"00, ".00, ".01, ".02, ".17, ".40*	Do.
8	1.129	1.00	82,400	82,400	1.26	21.9	49.7	"09, ".13, ".19, ".54*, ".20, ".11	Do.
9	.564	.25	15,790	79,150	.89	23.7	55.3	"18, ".32*, ".19	Fine silky, cup shaped.

A bending test was made on the short bar No. 9, diameter of body 1 1/8", prior to taking out the tensile specimen from one end of the same. The bar bent 160 degrees and then fractured in the threaded section with a granular appearance.

REMARKS.—The new threaded ends of rods Nos. 1, 2, and 3 were welded on, and the heating of rods Nos. 4 to 8 over their threaded sections was done prior to their being received for testing.






FIG. 1. Bolt with eye-shaped head and hexagonal base. FIG. 2. Bolt with eye-shaped head and hexagonal base. FIG. 3. Bolt with eye-shaped head and hexagonal base.





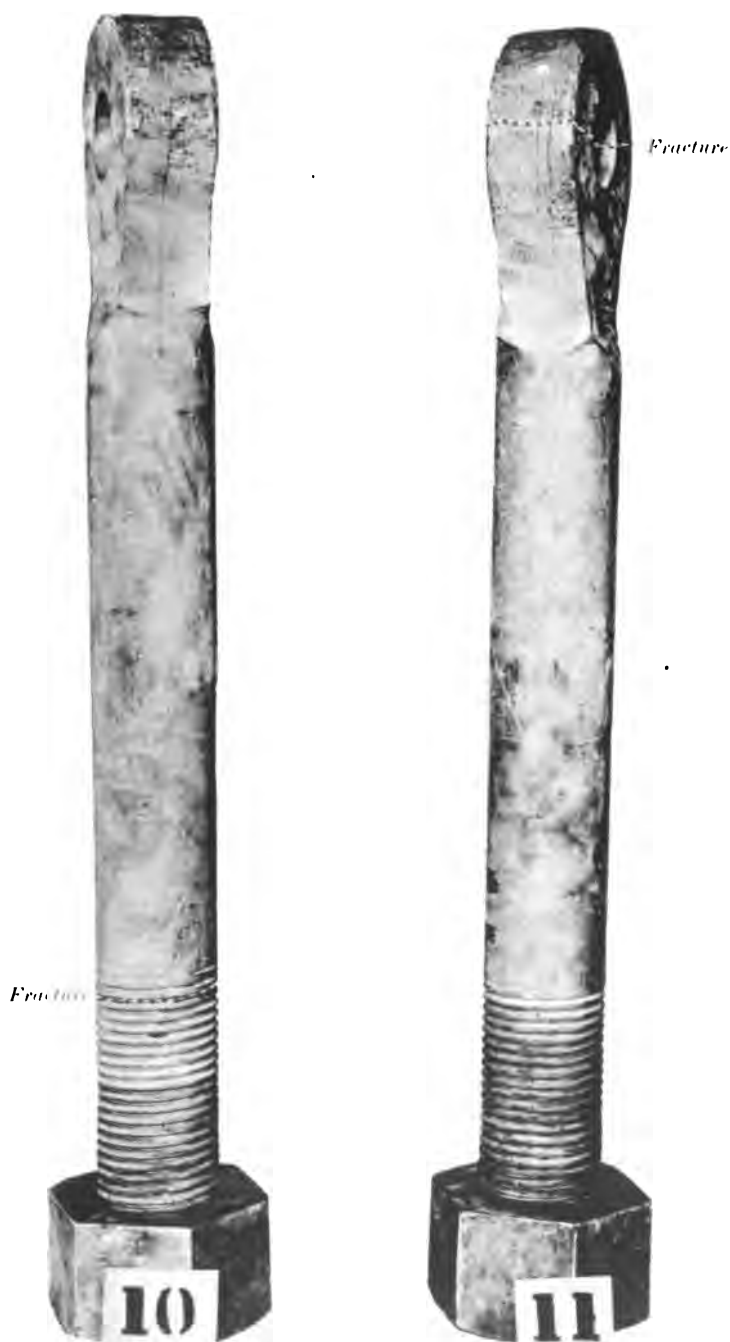Fig. 1. Pavotire (rod) with eye-bolt and threaded section.





NO. 3

APPARATUS OF NEW KIND, SHOWING LOCATION OF FRACTURE,  
MADE IN THE TESTING MACHINE





FIG. 1



FIG. 2



FIG. 3

RESEARCH REPORT NO. 100, UNIVERSITY OF CALIFORNIA, BERKELEY

RESEARCH REPORT NO. 100







ROD 4.


ROD 5.


ROD 6.

ROD 7.

ROD 8.

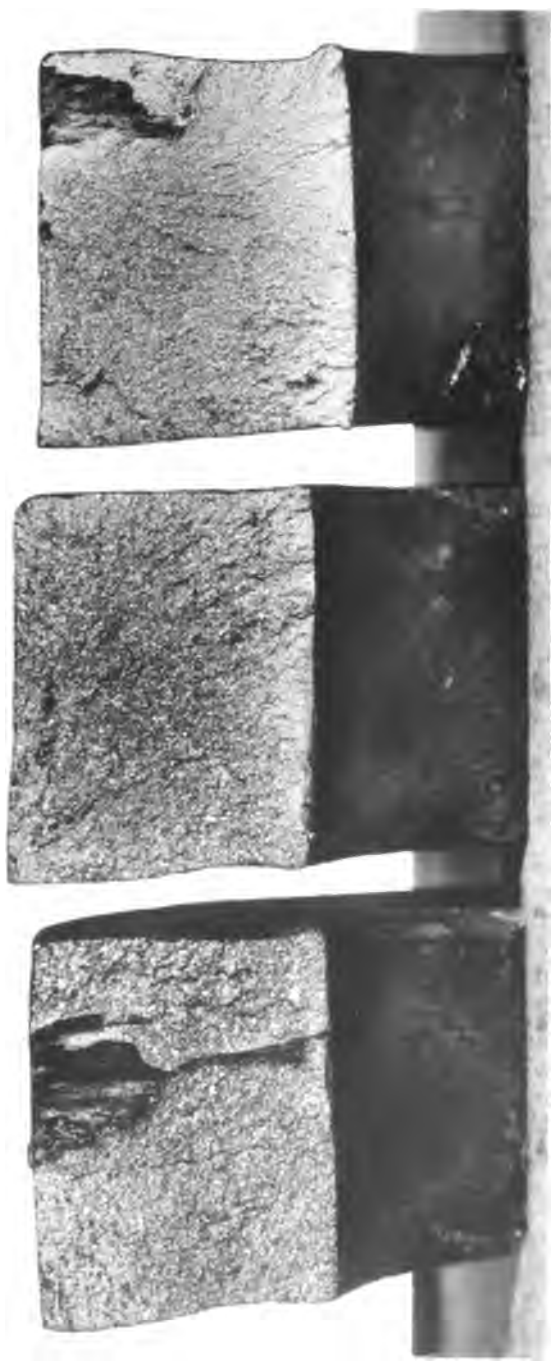RODS 4, 5, 6, 7, AND 8, BEFORE AND AFTER TESTING, AND FRACTURE OF ROD NO. 4, AFTER TESTING.






STEEL  
SPECIMENS

FIG. 3

CHARACTER OF THE FRACTURE SURFACES IN THE HEADS OF BOLTS MADE OF STEEL


THE FRACTURE SURFACE





NO. 7.


FRACTURED SURFACE OF ROD NO. 5, MADE DURING TESTING.  
THE DARK SPOTS AT THE CIRCUMFERENCE, BELOW THE THREAD, SHOW INCIPENT  
NECKING EXISTING IN THE ROD BEFORE TESTING.





NO. 8.

FRACTURED SURFACE OF ROD NO. 6, MADE DURING TESTING.  
THE DARK SPOTS AT THE CIRCUMFERENCE, BELOW THE T HRFAD, SHOW ANCIEN NT  
CRACKS EXISTING IN THE ROD BEFORE TESTING







NO. 9.

FRACTURED SURFACE OF ROD NO. 8, MADE DURING TESTING.  
THE DARK SPOTS AT THE CIRCUMFERENCE, BELOW THE THREAD, SHOW INCIPIENT  
CRACKS EXISTING IN THE ROD BEFORE TESTING.






FIG. 10.

THREADED PART OF ROD NO. 5, SHOWING INCIPENT CRACKS AT ROOT OF THREADS,  
WHICH EXISTED IN THE ROD BEFORE TESTING.





NO. 11.


THREADED PART OF ROD NO. 6, SHOWING INCIPIENT CRACKS AT ROOT OF THREADS,  
WHICH EXISTED IN THE ROD BEFORE TESTING.





NO. 12.


THREADED PART OF ROD NO. 8, SHOWING INCIPIENT CRACKS AT ROOT OF THREADS,  
WHICH EXISTED IN THE ROD BEFORE TESTING.







NO. 13.  
SHOWING NICHE CRACKS AT THE ROOT OF THE THREADS



---

---

ENDURANCE OF ROTATING SHAFTS.

---

---

H. Doc. 335—17

257

No. 301. Marks, 7 B 17 Y1—1.

Turned down from bar 1 1/4" diameter; 0.32 per cent carbon; 1.20 manganese.

Diameter, 1". Speed of rotation, 750 and 500 per minute.

Length between end supports, 33".


Loaded over 4" length at middle.

Deflection measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.			
Pounds 40,000	0	0	a	.2008	.1690	.2008	.0318	0.	
			b	.2006	.1688	.2006	.0318	0.	
			c	.2012	.1694	.2012	.0318	0.	
	10,000	10,000	a	.2008	.1688	.2008	.0320	0.	
			b	.2006	.1686	.2006	.0320	0.	
			c	.2012	.1691	.2011	.0320	.0001	
	90,000	100,000	a	.2006	.1680	.2006	.0326	0.	
			b	.2005	.1680	.2005	.0325	0.	
			c	.2012	.1685	.2012	.0327	0.	
	0	100,000	a	.2008	.1688	.2008	.0320	0.	
			b	.2007	.1685	.2007	.0322	0.	
			c	.2011	.1691	.2011	.0320	0.	
80,018,000	80,118,000							Bar warm, about 150° F.	
0	80,118,000	a	.1655	.1335	.1655	.0320	0.	Bar rested without load an interval of 4 years 3 months, at the end of which rest the test was resumed, the speed of rotation now being 500 per minute, other conditions of the test as before.	
		b	.1653	.1331	.1653	.0322	0.		
		c	.1659	.1342	.1659	.0317	0.		
1,000	80,119,000	a	.1654	.1326	.1654	.0328	0.		
		b	.1652	.1327	.1652	.0325	0.		
		c	.1659	.1340	.1658	.0318	.0001		
45,000	80,119,000	a	.1655	.1298	.1655	.0357	0.		
		b	.1654	.1287	.1653	.0366	.0001		
		c	.1659	.1296	.1659	.0363	0.		
1,000	80,120,000	a	.1654	.1292	.1654	.0362	0.		
		b	.1653	.1290	.1653	.0363	0.		
		c	.1659	.1295	.1659	.0364	0.		
9,000	80,129,000	a	.1655	.1289	.1654	.0365	.0001		
		b	.1653	.1290	.1652	.0362	.0001		
		c	.1658	.1294	.1658	.0364	0.		
6,489,000	86,618,000	a	.1639	.1275	.1639	.0364	0.		
		b	.1635	.1278	.1635	.0357	0.		
		c	.1642	.1283	.1641	.0358	.0001		
50,000	86,618,000	a	.1638	.1289	.1638	.0399	0.		
		b	.1636	.1236	.1635	.0399	.0001		
		c	.1642	.1244	.1643	.0399	0.		
1,000	86,619,000	a	.1638	.1284	.1638	.0404	0.		
		b	.1635	.1233	.1635	.0402	0.		
		c	.1643	.1241	.1642	.0401	.0001		
9,000	86,623,000	a	.1638	.1237	.1638	.0401	0.		
		b	.1636	.1233	.1635	.0402	.0001		
		c	.1643	.1241	.1641	.0400	.0002		



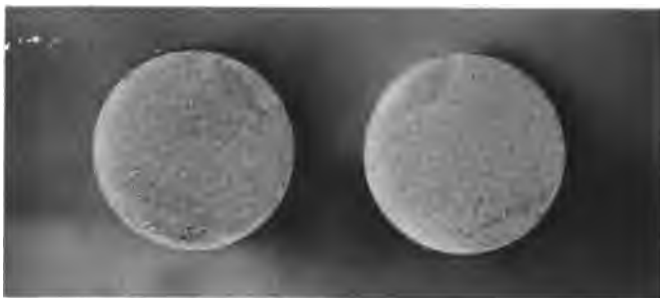NO. 299.



NO. 301.

FRACTURED ENDS OF ENDURANCE SHAFTS.



Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
Pounds	7,983,490	94,611,490	a	Inch. .1645	Inch. .1237	Inch. .1644	Inch. .0407	Inch. .0001	
			b	.1640	.1234	.1640	.0406	0.	
			c	.1638	.1237	.1638	.0401	0.	
55,000	0	94,611,490	a	.1644	.1198	.1644	.0446	0.	
			b	.1641	.1200	.1640	.0440	.0001	
			c	.1639	.1199	.1639	.0440	0.	
	1,000	94,612,490	a	.1643	.1205	.1643	.0438	0.	
			b	.1641	.1201	.1640	.0439	.0001	
			c	.1639	.1200	.1638	.0438	.0001	
	9,000	94,621,490	a	.1644	.1207	.1645	.0438	.0001	
			b	.1641	.1205	.1640	.0435	.0001	
			c	.1639	.1203	.1638	.0435	.0001	
	100,000	94,721,490	a	.1644	.1203	.1644	.0441	0.	
			b	.1640	.1201	.1640	.0439	0.	
			c	.1640	.1200	.1638	.0438	.0002	
	797,520	95,519,010							Bar ruptured .50 south of south edge of south middle bearing.

No. 308. Marks, 11-C 3.

Turned down from bar 1 1/4" diameter; 1.09 per cent carbon. Hot rolled bar.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".


Loaded over 4" length at middle.

Deflections measured on chord of 10".


Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
Pounds. 40,000	0	0	a	Inch. .1270	Inch. .0949	Inch. .1269	Inch. .0320	Inch. .0001	
			b	.1273	.0949	.1272	.0323	.0001	
			c	.1272	.0945	.1272	.0327	0.	
	1,000	1,000	a	.1270	.0942	.1269	.0327	.0001	
			b	.1273	.0941	.1271	.0330	.0002	
			c	.1273	.0939	.1271	.0332	.0002	
	9,000	10,000	a	.1270	.0935	.1267	.0332	.0003	
			b	.1273	.0939	.1271	.0332	.0002	
			c	.1270	.0936	.1268	.0332	.0002	
	177,200	187,200	a	.1330	.0987	.1325	.0338	.0005	
			b	.1340	.0991	.1329	.0338	.0011	
			c	.1335	.0989	.1325	.0336	.0010	
	359,600	1,046,800	a	.1375	.1036	.1375	.0339	0.	
			b	.1393	.1039	.1381	.0342	.0012	
			c	.1398	.1041	.1382	.0341	.0016	

Maxi- mum- fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Def- lec- tions.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un- load- ed.	Load- ed.	Un- load- ed.				
Pounds	9, 631, 850	10, 678, 150	a	Inch. .1455	Inch. .1108	Inch. .1448	Inch. .0840	Inch. .0007	Barrested without load an interval of 10 months, at the end of which rest the test was resumed, under same conditions as before.	
	-----	-----	b	.1458	.1110	.1451	.0841	.0007		
	-----	-----	c	.1462	.1111	.1451	.0840	.0011		
	42, 315, 080	52, 993, 210	a	.1554	.1219	.1546	.0827	.0008		
	-----	-----	b	.1555	.1219	.1549	.0830	.0006		
	-----	-----	c	.1556	.1220	.1549	.0829	.0006		
	47, 969, 090	100, 982, 300	a	.1555	.1228	.1553	.0825	.0002		
	-----	-----	b	.1555	.1227	.1553	.0826	.0002		
	-----	-----	c	.1557	.1228	.1554	.0826	.0003		
	28, 626, 650	129, 688, 950	a	.1556	.1224	.1553	.0829	.0008		
	-----	-----	b	.1555	.1223	.1553	.0830	.0002		
	-----	-----	c	.1556	.1224	.1554	.0830	.0002		
	787, 310	130, 356, 260	-----	-----	-----	-----	-----	-----		-----
	0	130, 356, 260	a	.1656	.1325	.1656	.0831	0.		
	-----	-----	b	.1656	.1327	.1655	.0828	.0001		
	-----	-----	c	.1659	.1328	.1657	.0829	.0002		
	1, 000	130, 357, 260	a	.1658	.1326	.1656	.0830	.0002		
	-----	-----	b	.1656	.1326	.1655	.0829	.0001		
-----	-----	c	.1659	.1329	.1657	.0828	.0002			
10, 000	130, 367, 260	a	.1656	.1328	.1655	.0827	.0001			
-----	-----	b	.1657	.1330	.1655	.0825	.0002			
-----	-----	c	.1659	.1329	.1657	.0828	.0002			
132, 740	130, 500, 000	-----	-----	-----	-----	-----	-----	-----		
45, 000	0	130, 500, 000	a	.1654	.1287	.1654	.0867	0.		
	-----	-----	b	.1655	.1285	.1654	.0869	.0001		
	-----	-----	c	.1657	.1291	.1656	.0865	.0001		
	1, 000	130, 501, 000	a	.1656	.1281	.1654	.0873	.0002		
	-----	-----	b	.1659	.1286	.1655	.0869	.0004		
	-----	-----	c	.1659	.1283	.1656	.0873	.0008		
	10, 000	130, 511, 000	a	.1658	.1277	.1652	.0875	.0006		
	-----	-----	b	.1660	.1287	.1655	.0868	.0005		
	-----	-----	c	.1660	.1285	.1655	.0870	.0005		
	904, 010	131, 415, 010	a	.1659	.1253	.1643	.0890	.0016		
	-----	-----	b	.1677	.1260	.1645	.0885	.0032		
	-----	-----	c	.1667	.1256	.1642	.0886	.0025		
102, 290	131, 517, 300	-----	-----	-----	-----	-----	-----	Bar ruptured "10 south of the south edge of the north middle bearing.		



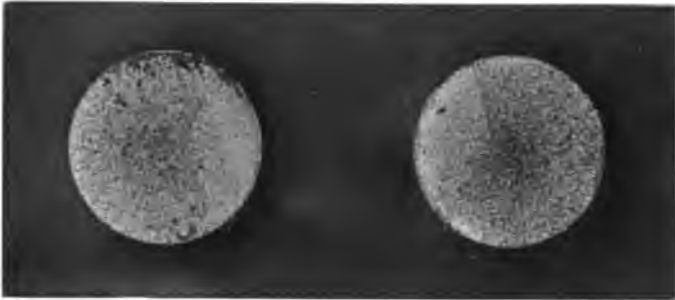

NO. 308.

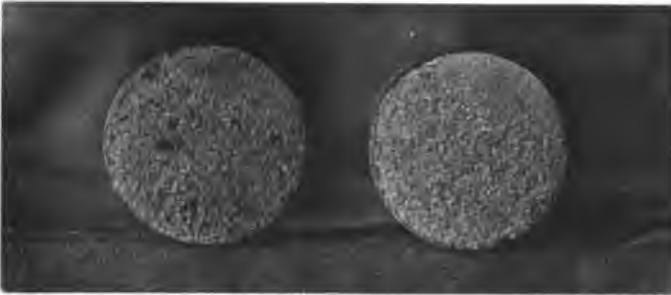

NO. 309.

FRACTURED ENDS OF ENDURANCE SHAFTS.



No. 309. Marks, 7-B1.

Turned down from bar 1 1/4" diameter; 0.73 per cent carbon. Hot rolled bar.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.			Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.				Un-load-ed.
Pounds 40,000	0	0	a	.1320	.0994	.1320	.0326	0.	
			b	.1319	.0991	.1318	.0327	.0001	
			c	.1318	.0991	.1318	.0327	0.	
	1,000	1,000	a	.1320	.0995	.1320	.0325	0.	
			b	.1318	.0991	.1318	.0327	0.	
			c	.1317	.0992	.1317	.0325	0.	
	9,000	10,000	a	.1319	.0995	.1319	.0324	0.	
			b	.1318	.0994	.1317	.0323	.0001	
			c	.1318	.0992	.1318	.0326	0.	
	84,700	94,700	a	.1329	.1001	.1328	.0327	.0001	
			b	.1328	.1008	.1327	.0324	.0001	
			c	.1329	.1000	.1327	.0327	.0002	
	924,000	1,018,700	a	.1376	.1049	.1376	.0327	0.	
			b	.1375	.1049	.1374	.0325	.0001	
			c	.1374	.1048	.1374	.0326	0.	
	9,408,510	10,427,210	a	.1445	.1118	.1444	.0326	.0001	
			b	.1444	.1116	.1443	.0327	.0001	
			c	.1443	.1116	.1443	.0327	0.	
	41,274,760	51,701,970	a	.1542	.1217	.1542	.0325	0.	
			b	.1541	.1214	.1540	.0326	.0001	
			c	.1540	.1213	.1540	.0327	0.	
	51,565,330	103,267,300	a	.1549	.1216	.1548	.0332	.0001	
			b	.1546	.1215	.1546	.0331	0.	
			c	.1546	.1212	.1545	.0333	.0001	
46,567,860	149,835,160							Bar rested without load an interval of 10 months, at the end of which rest the test was resumed, under same conditions as before.	
11,370	149,846,530	a	.1644	.1322	.1644	.0322	0.		
		b	.1643	.1321	.1642	.0321	.0001		
		c	.1642	.1320	.1642	.0322	0.		
153,470	150,000,000								
45,000	0	150,000,000	a	.1647	.1280	.1645	.0365		.0002
			b	.1644	.1282	.1643	.0361		.0001
			c	.1644	.1283	.1643	.0360		.0001
	1,000	150,001,000	a	.1646	.1288	.1645	.0357		.0001
			b	.1644	.1283	.1643	.0360		.0001
			c	.1644	.1280	.1643	.0363		.0001
	10,000	150,011,000	a	.1646	.1285	.1645	.0360		.0001
			b	.1645	.1283	.1643	.0360	.0002	
			c	.1644	.1282	.1642	.0360	.0002	
	9,489,000	159,500,000	a	.1629	.1264	.1629	.0365	0.	
			b	.1629	.1259	.1626	.0367	.0003	
			c	.1628	.1259	.1625	.0366	.0003	

## ENDURANCE OF ROTATING SHAFTS.

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.				
<i>Pounds</i> 50,000	0	159,500,000	a	<i>Inch.</i> .1633	<i>Inch.</i> .1225	<i>Inch.</i> .1630	<i>Inch.</i> .0405	<i>Inch.</i> .0003		
			b	.1630	.1220	.1627	.0407	.0003		
			c	.1629	.1221	.1626	.0405	.0003		
	1,000	159,501,000	a	.1630	.1222	.1630	.0408	0.		
			b	.1630	.1217	.1627	.0410	.0003		
			c	.1629	.1218	.1626	.0408	.0003		
	9,000	159,510,000	a	.1635	.1224	.1630	.0406	.0005		
			b	.1630	.1219	.1627	.0408	.0003		
			c	.1630	.1218	.1625	.0407	.0005		
	344,050	159,854,050								Bar ruptured midway the north and south middle bearings.

No. 310. Marks, 9-C 2.

Turned down from bar 1½" diameter; 0.82 per cent carbon. Hot rolled bar.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
<i>Pounds</i> 40,000	0	0	a	<i>Inch.</i> .1346	<i>Inch.</i> .1018	<i>Inch.</i> .1345	<i>Inch.</i> .0327	<i>Inch.</i> .0001	
			b	.1346	.1016	.1345	.0329	.0001	
			c	.1343	.1015	.1343	.0328	0.	
	1,000	1,000	a	.1345	.1020	.1345	.0325	0.	
			b	.1346	.1016	.1345	.0329	.0001	
			c	.1345	.1014	.1344	.0330	.0001	
	9,000	10,000	a	.1345	.1009	.1344	.0335	.0001	
			b	.1345	.1016	.1344	.0328	.0001	
			c	.1344	.1010	.1341	.0331	.0003	
	189,500	199,500	a	.1359	.1020	.1355	.0335	.0004	
			b	.1355	.1024	.1353	.0329	.0002	
			c	.1352	.1018	.1350	.0332	.0002	
	908,000	1,107,500	a	.1412	.1077	.1412	.0335	0.	
			b	.1416	.1076	.1413	.0337	.0003	
			c	.1413	.1075	.1410	.0335	.0003	
	10,640,600	11,748,100	a	.1477	.1143	.1474	.0331	.0003	
			b	.1476	.1145	.1474	.0329	.0002	
			c	.1475	.1145	.1472	.0327	.0003	
	39,087,820	50,785,920	a	.1575	.1242	.1573	.0331	.0002	
			b	.1575	.1244	.1574	.0330	.0001	
			c	.1572	.1242	.1570	.0328	.0002	

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.			
Pounds	51,314,240	102,100,160	a	Inch. .1579	Inch. .1249	Inch. .1578	Inch. .0329	.0001	Bar rested without load an interval of 10 months, at the end of which rest the test was resumed, under same conditions as before.
	.....	.....	b	.1577	.1248	.1577	.0329	0.	
	.....	.....	c	.1575	.1244	.1574	.0330	.0001	
	49,169,090	151,269,250	a	.1580	.1250	.1580	.0330	0.	
	.....	.....	b	.1580	.1246	.1579	.0333	.0001	
	.....	.....	c	.1576	.1246	.1576	.0330	0.	
	754,110	152,023,360	.....	.....	.....	.....	.....	.....	
	2,090	152,025,450	a	.1679	.1361	.1678	.0317	.0001	
	.....	.....	b	.1678	.1360	.1677	.0317	.0001	
	.....	.....	c	.1674	.1357	.1674	.0317	0.	
	1,000	152,028,450	a	.1677	.1357	.1676	.0319	.0001	
	.....	.....	b	.1677	.1357	.1676	.0319	.0001	
.....	.....	c	.1675	.1355	.1674	.0319	.0001		
10,000	152,036,450	a	.1678	.1358	.1677	.0319	.0001		
.....	.....	b	.1677	.1358	.1676	.0318	.0001		
.....	.....	c	.1675	.1356	.1674	.0318	.0001		
464,270	152,500,720	.....	.....	.....	.....	.....	.....		
45,000	0	152,500,720	a	.1678	.1324	.1678	.0354	0.	
	.....	.....	b	.1678	.1324	.1677	.0353	.0001	
	.....	.....	c	.1676	.1320	.1676	.0355	.0001	
	1,000	152,501,720	a	.1679	.1322	.1678	.0356	.0001	
	.....	.....	b	.1678	.1322	.1677	.0355	.0001	
	.....	.....	c	.1675	.1320	.1676	.0355	0.	
	10,010	152,511,780	a	.1679	.1322	.1678	.0356	.0001	
	.....	.....	b	.1678	.1322	.1677	.0355	.0001	
	.....	.....	c	.1677	.1319	.1676	.0356	.0002	
	928,280	153,440,010	a	.1684	.1304	.1673	.0369	.0011	
	.....	.....	b	.1681	.1304	.1672	.0368	.0009	
	.....	.....	c	.1679	.1302	.1669	.0367	.0010	
47,580	153,487,540	a	.1683	.1309	.1673	.0364	.0010		
.....	.....	b	.1683	.1309	.1673	.0364	.0010		
.....	.....	c	.1679	.1305	.1670	.0365	.0009		
784,440	154,271,980	.....	.....	.....	.....	.....	.....	Bar ruptured 1."10 south of the south edge of north middle bearing.	

No. 321. Marks,  $7 \times 2, 1$ .  
 Turned down from bar  $1\frac{1}{4}$ " diameter. 0.25 per cent carbon. Annealed at low heat.

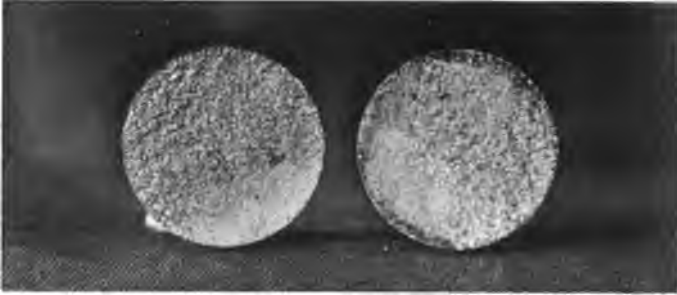
Diameter, 1". Speed of rotation, 500 per minute

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.				
Pounds 40,000	0	0	a	.1568	.1229	.1567	.0328	.0001	Bar rested without load an interval of 10 months, at the end of which rest the test was resumed, under same conditions as before.	
			b	.1547	.1218	.1546	.0328	.0001		
			c	.1568	.1234	.1566	.0332	.0002		
	1,000	1,000	a	.1557	.1222	.1556	.0334	.0001		
			b	.1547	.1210	.1545	.0335	.0002		
			c	.1568	.1229	.1566	.0337	.0002		
	9,000	10,000	a	.1568	.1224	.1557	.0333	.0001		
			b	.1544	.1208	.1543	.0335	.0001		
			c	.1568	.1235	.1568	.0333	0.		
	3,168,160	3,178,160	a	.1559	.1229	.1557	.0328	.0002		
			b	.1546	.1216	.1545	.0329	.0001		
			c	.1570	.1239	.1568	.0329	.0002		
	18,096,740	21,274,900	a	.1559	.1230	.1559	.0329	0.		
			b	.1547	.1218	.1546	.0328	.0001		
			c	.1569	.1233	.1569	.0331	0.		
	22,901,830	44,176,730	a	.1560	.1227	.1560	.0333	0.		
			b	.1546	.1214	.1546	.0332	0.		
			c	.1571	.1235	.1570	.0335	.0001		
	754,100	44,930,830								
	150	44,930,980	a	.1664	.1334	.1664	.0330	0.		
			b	.1648	.1316	.1647	.0331	.0001		
			c	.1674	.1348	.1674	.0326	0.		
	69,020	45,000,000								
	45,000	0	45,000,000	a	.1665	.1294	.1664	.0370		.0001
			b	.1649	.1277	.1647	.0370	.0002		
			c	.1674	.1305	.1674	.0369	0.		
1,000	45,001,000	a	.1665	.1294	.1664	.0370	.0001			
		b	.1649	.1283	.1648	.0365	.0001			
		c	.1675	.1304	.1674	.0370	.0001			
899,790	45,900,790	a	.1661	.1285	.1661	.0376	0.			
		b	.1649	.1269	.1648	.0379	.0001			
		c	.1676	.1299	.1673	.0374	.0003			
21,850	45,922,640							Bar ruptured .08 south of the north edge of north middle bearing.		




NO. 310.



NO. 321.

FRACTURED ENDS OF ENDURANCE SHAFTS.





No. 322. Marks, N 3-E.

0.17 per cent carbon; 8.25 per cent nickel. Metal in natural state of the ingot.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
Pounds 10,000	0	0	a	Inch. .1663	Inch. .1579	Inch. .1663	Inch. .0084	Inch. 0.	
			b	.1661	.1577	.1661	.0084	0.	
			c	.1661	.1578	.1661	.0088	0.	
	1,000	1,000	a	.1662	.1578	.1662	.0084	0.	
			b	.1661	.1577	.1661	.0084	0.	
			c	.1661	.1578	.1661	.0088	0.	
	9,000	10,000	a	.1662	.1578	.1662	.0084	0.	
			b	.1661	.1577	.1661	.0084	0.	
			c	.1661	.1578	.1661	.0088	0.	
15,000	0	10,000	a	.1662	.1587	.1662	.0125	0.	
			b	.1661	.1587	.1661	.0124	0.	
			c	.1661	.1586	.1661	.0125	0.	
	1,000	11,000	a	.1662	.1587	.1662	.0125	0.	
			b	.1661	.1585	.1661	.0125	0.	
			c	.1661	.1586	.1661	.0125	0.	
	10,000	21,000	a	.1662	.1585	.1662	.0127	0.	
			b	.1661	.1585	.1661	.0126	0.	
			c	.1661	.1586	.1661	.0126	0.	
20,000	0	21,000	a	.1662	.1498	.1662	.0164	0.	
			b	.1661	.1495	.1661	.0166	0.	
			c	.1661	.1495	.1661	.0166	0.	
	1,000	22,000	a	.1662	.1495	.1662	.0167	0.	
			b	.1661	.1495	.1661	.0166	0.	
			c	.1661	.1495	.1661	.0166	0.	
	10,000	32,000	a	.1662	.1495	.1662	.0167	0.	
			b	.1661	.1494	.1661	.0167	0.	
			c	.1661	.1495	.1661	.0166	0.	
25,000	0	32,000	a	.1662	.1455	.1662	.0207	0.	
			b	.1661	.1450	.1661	.0211	0.	
			c	.1661	.1450	.1661	.0211	0.	
	1,000	33,000	a	.1660	.1450	.1659	.0209	.0001	
			b	.1662	.1450	.1661	.0211	.0001	
			c	.1662	.1450	.1661	.0211	.0001	
	10,000	43,000	a	.1660	.1447	.1660	.0213	0.	
			b	.1662	.1449	.1661	.0212	.0001	
			c	.1662	.1450	.1661	.0211	.0001	
30,000	0	43,000	a	.1663	.1406	.1660	.0254	.0008	
			b	.1664	.1410	.1660	.0250	.0004	
			c	.1664	.1406	.1660	.0254	.0004	
	1,000	44,000	a	.1660	.1410	.1657	.0247	.0008	
			b	.1665	.1407	.1660	.0253	.0005	
			c	.1664	.1407	.1660	.0253	.0004	
	10,000	54,000	a	.1664	.1409	.1659	.0250	.0005	
			b	.1662	.1405	.1658	.0253	.0004	
			c	.1663	.1409	.1660	.0251	.0008	
74,840	128,840	-----	-----	-----	-----	-----	-----	Bar ruptured 1". 25 north of the north edge of south middle bearing.	

No. 323. Marks, C 3-E.

0.20 per cent carbon. Metal in natural state of the ingot.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotation.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.				
Pounds 20,000	0	0	a	Inch. .1664	Inch. .1467	Inch. .1628	Inch. .0161	Inch. .0036	Hole ".09 by ".15 deep in shaft 1".24 south of the south edge of south middle bearing.	
			b	.1673	.1480	.1640	.0180	.0083		
			c	.1714	.1490	.1662	.0162	.0062		
	1,000	1,000	a	.1655	.1474	.1635	.0181	.0020		
			b	.1666	.1478	.1640	.0162	.0026		
			c	.1710	.1494	.1656	.0162	.0054		
	10,000	11,000	a	.1666	.1484	.1648	.0164	.0018		
			b	.1668	.1488	.1650	.0162	.0018		
			c	.1695	.1500	.1661	.0161	.0084		
	99,000	110,000	a	.1674	.1496	.1658	.0162	.0016		
			b	.1671	.1503	.1665	.0162	.0006		
			c	.1679	.1508	.1668	.0160	.0011		
	690,250	800,250								Bar ruptured ".35 south of the south edge of north middle bearing.

No. 324. Marks, 7 × 1, 3.

Turned down from bar 1½" diameter. 0.26 per cent carbon. Annealed at high heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.				
Pounds 45,000	0	0	a	Inch. .1662	Inch. .1248	Inch. .1610	Inch. .0362	Inch. .0042	Bar ruptured ".55 south of the south edge of north middle bearing.	
			b	.1681	.1310	.1674	.0364	.0007		
			c	.1675	.1298	.1664	.0366	.0011		
	1,000	1,000	a	.1622	.1239	.1607	.0808	.0015		
			b	.1674	.1296	.1663	.0368	.0011		
			c	.1682	.1294	.1660	.0366	.0022		
	10,000	11,000	a	.1647	.1242	.1613	.0871	.0084		
			b	.1639	.1285	.1658	.0373	.0031		
			c	.1642	.1270	.1639	.0369	.0008		
	91,010	102,010								Bar ruptured ".55 south of the south edge of north middle bearing.


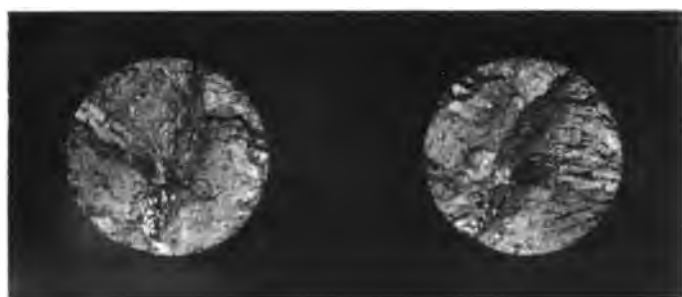


Figure 2



Figure 3

Figure 4 (continued)





NO. 324.



NO. 325.

FRACTURED ENDS OF ENDURANCE SHAFTS.



No. 325. Marks, N 3-D.

0.17 per cent carbon, 3.25 per cent nickel. Oil tempered and annealed.

Diameter, 1." Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
Pounds 10,000	0	0	a	.1659	.1575	.1658	.0083	.0001	
			b	.1664	.1579	.1664	.0085	0.	
			c	.1657	.1572	.1657	.0085	0.	
	1,000	1,000	a	.1644	.1560	.1643	.0083	.0001	
			b	.1648	.1562	.1647	.0085	.0001	
			c	.1642	.1557	.1641	.0084	.0001	
	9,000	10,000	a	.1644	.1559	.1644	.0085	0.	
			b	.1648	.1563	.1647	.0084	.0001	
			c	.1641	.1557	.1641	.0084	0.	
15,000	0	10,000	a	.1644	.1518	.1643	.0125	.0001	
			b	.1648	.1522	.1647	.0125	.0001	
			c	.1641	.1514	.1640	.0126	.0001	
	1,000	11,000	a	.1643	.1516	.1643	.0127	0.	
			b	.1648	.1520	.1647	.0127	.0001	
			c	.1641	.1515	.1640	.0125	.0001	
	10,000	21,000	a	.1642	.1516	.1642	.0126	0.	
			b	.1647	.1518	.1646	.0128	.0001	
			c	.1642	.1515	.1641	.0126	.0001	
20,000	0	21,000	a	.1645	.1475	.1643	.0168	.0002	
			b	.1648	.1480	.1646	.0166	.0002	
			c	.1642	.1473	.1640	.0167	.0002	
	1,000	22,000	a	.1644	.1476	.1642	.0166	.0002	
			b	.1647	.1480	.1646	.0166	.0001	
			c	.1642	.1472	.1640	.0168	.0002	
	10,000	32,000	a	.1642	.1474	.1642	.0168	0.	
			b	.1647	.1478	.1647	.0169	0.	
			c	.1642	.1472	.1640	.0168	.0002	
25,000	0	32,000	a	.1641	.1433	.1641	.0208	0.	
			b	.1647	.1435	.1645	.0210	.0002	
			c	.1642	.1430	.1640	.0210	.0002	
	1,000	33,000	a	.1643	.1435	.1642	.0207	.0001	
			b	.1649	.1438	.1647	.0209	.0002	
			c	.1642	.1431	.1640	.0209	.0002	
	10,000	43,000	a	.1644	.1433	.1642	.0209	.0002	
			b	.1647	.1434	.1645	.0211	.0002	
			c	.1642	.1430	.1640	.0210	.0002	
30,000	0	43,000	a	.1642	.1398	.1642	.0249	0.	
			b	.1646	.1398	.1645	.0252	.0001	
			c	.1643	.1388	.1640	.0252	.0008	
	1,000	44,000	a	.1644	.1398	.1642	.0249	.0002	
			b	.1648	.1398	.1645	.0252	.0008	
			c	.1642	.1388	.1640	.0252	.0002	
	10,000	54,000	a	.1643	.1390	.1642	.0252	.0001	
			b	.1646	.1398	.1644	.0251	.0002	
			c	.1639	.1387	.1639	.0252	0.	
	96,000	150,000	a	.1645	.1389	.1642	.0253	.0008	
			b	.1648	.1391	.1646	.0255	.0002	
			c	.1643	.1388	.1640	.0252	.0003	
	66,580	216,580							

Bar ruptured 1" .20 south of the south edge of north middle bearing.

No. 327. Marks, C 3-D.  
 0.20 per cent carbon. Oil tempered and annealed.  
 Diameter, 1". Speed of rotation, 500 per minute.  
 Length between end supports, 33".  
 Loaded over 4" length at middle.  
 Deflections measured on a chord of 10'.

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
Pounds 20,000	0	0	a	Inch. .1648	Inch. .1486	Inch. .1648	Inch. .0162	Inch. 0.	
			b	.1648	.1488	.1643	.0160	0.	
			c	.1645	.1481	.1644	.0168	.0001	
	1,000	1,000	a	.1648	.1484	.1648	.0164	0.	
			b	.1644	.1480	.1642	.0162	.0002	
			c	.1644	.1483	.1643	.0160	.0001	
	109,000	110,000	a	.1647	.1487	.1647	.0160	0.	
			b	.1644	.1482	.1644	.0162	0.	
			c	.1644	.1483	.1644	.0161	0.	
	8,890,000	9,000,000	a	.1647	.1488	.1645	.0162	.0002	
			b	.1650	.1488	.1650	.0162	0.	
			c	.1646	.1483	.1646	.0163	0.	
25,000	0	9,000,000	a	.1647	.1445	.1645	.0200	.0002	
			b	.1650	.1448	.1650	.0202	0.	
			c	.1646	.1445	.1645	.0200	.0001	
	1,000	9,001,000	a	.1646	.1447	.1645	.0198	.0001	
			b	.1652	.1450	.1650	.0200	.0002	
			c	.1647	.1444	.1645	.0201	.0002	
	9,000	9,010,000	a	.1645	.1442	.1644	.0202	.0001	
			b	.1650	.1447	.1650	.0203	0.	
			c	.1646	.1443	.1645	.0202	.0001	
	990,000	10,000,000	a	.1645	.1439	.1644	.0205	.0001	
			b	.1652	.1437	.1640	.0203	.0012	
			c	.1649	.1442	.1646	.0204	.0003	
30,000	0	10,000,000	a	.1647	.1399	.1644	.0245	.0003	
			b	.1652	.1403	.1643	.0245	.0004	
			c	.1643	.1402	.1645	.0243	.0003	
	1,000	10,001,000	a	.1643	.1396	.1642	.0246	.0001	
			b	.1653	.1402	.1643	.0246	.0005	
			c	.1650	.1401	.1645	.0244	.0005	
	9,000	10,010,000	a	.1643	.1394	.1641	.0247	.0007	
			b	.1652	.1397	.1644	.0247	.0003	
			c	.1652	.1400	.1646	.0246	.0006	
	19,940	10,029,940							Bar ruptured .85 south of the south edge of north middle bearing, beginning at a small cavity at the circumference.





NO. 327.



NO. 329.

FRACTURED ENDS OF ENDURANCE SHAFTS.



No. 328. Marks, 7×2, 5.

Turned down from bar 1½" diameter. 0.25 per cent carbon. Oil tempered and annealed at low heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.			
Pounds 45,000	0	0	a	Inch. .1618	Inch. .1252	Inch. .1614	Inch. .0862	Inch. .0004	Shaft ran out of line at middle of length, re-straightened by bend-ing outside of middle bearings.  Shaft ruptured at north edge of south middle bearing.
			b	.1647	.1280	.1645	.0865	.0002	
	1,000	1,000	a	.1610	.1238	.1607	.0869	.0008	
			b	.1652	.1280	.1649	.0869	.0008	
	9,000	10,000	a	.1609	.1233	.1607	.0874	.0002	
			b	.1652	.1278	.1648	.0875	.0004	
	658,360	668,360	a	.1604	.1229	.1603	.0874	.0001	
			b	.1657	.1279	.1653	.0874	.0004	
	0	668,360	a	.1620	.1244	.1615	.0871	.0005	
			b	.1647	.1272	.1643	.0871	.0004	
	3,728,120	4,396,480							

No. 329. Marks, 7×1, 5.

Turned down from bar 1½" diameter. 0.26 per cent carbon. Oil tempered and annealed at low heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.			
Pounds 45,000	0	0	a	Inch. .1647	Inch. .1278	Inch. .1643	Inch. .0865	Inch. .0004	Bar ruptured 1" 10 south of the south edge of north middle bearing.
			b	.1638	.1262	.1627	.0865	.0006	
	1,000	1,000	a	.1647	.1277	.1640	.0863	.0007	
			b	.1636	.1264	.1628	.0864	.0006	
	9,000	10,000	a	.1655	.1274	.1643	.0869	.0012	
			b	.1638	.1247	.1613	.0871	.0015	
	90,000	100,000	a	.1653	.1271	.1640	.0869	.0013	
			b	.1635	.1250	.1620	.0870	.0015	
	94,470	194,470							

No. 330. Marks,  $7 \times 1, 2$ .

Turned down from bar  $1\frac{1}{4}$ " diameter. 0.26 per cent carbon.  
Annealed at low heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.				
Pounds 45,000	0	0	a	Inch. .1638	Inch. .1288	Inch. .1637	Inch. .0869	Inch. .0001		
			b	.1638	.1283	.1632	.0869	.0001		
	1,000	1,000	a	.1637	.1287	.1637	.0870	0.		
			b	.1634	.1283	.1633	.0870	.0001		
	9,000	10,000	a	.1639	.1286	.1636	.0870	.0008		
			b	.1635	.1282	.1631	.0869	.0004		
	90,000	100,000	a	.1640	.1282	.1634	.0872	.0006		
			b	.1628	.1287	.1628	.0871	0.		
	1,772,340	1,872,340								Bar ruptured 1".35 south of the south edge of north middle bearing.

No. 331. Marks,  $7 \times 1, 4$ .

Turned down from bar  $1\frac{1}{4}$ " diameter. 0.26 per cent carbon.  
Annealed at high heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.				
Pounds 45,000	0	0	a	Inch. .1639	Inch. .1287	Inch. .1636	Inch. .0869	Inch. .0008		
			b	.1638	.1289	.1635	.0866	.0008		
	1,000	1,000	a	.1643	.1288	.1629	.0866	.0014		
			b	.1644	.1282	.1630	.0868	.0014		
	9,000	10,000	a	.1635	.1255	.1623	.0868	.0012		
			b	.1650	.1253	.1624	.0871	.0026		
	90,000	100,000	a	.1649	.1243	.1625	.0882	.0024		
			b	.1658	.1249	.1625	.0876	.0033		
	235,100	335,100								Bar ruptured 1".30 south of the south edge of north middle bearing.




NO. 329.



NO. 330.

FRACTURED ENDS OF ENDURANCE SHAFTS.






NO. 331.



NO. 332.

FRAGMENTED PARTS OF ENCRUSTED SHEETS.





No. 332. Marks, 7×1, 6.

Turned down from bar 1½" diameter; 0.26 per cent carbon. Oil-tempered and annealed at low heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.				
Pounds 45,000	0	0	a	Inch. .1631	Inch. .1262	Inch. .1630	Inch. .0368	Inch. .0001		
	.....	.....	b	.1637	.1263	.1631	.0368	.0006		
	1,000	1,000	a	.1635	.1262	.1630	.0368	.0005		
	.....	.....	b	.1636	.1262	.1630	.0368	.0006		
	9,000	10,000	a	.1628	.1257	.1627	.0370	.0001		
	.....	.....	b	.1639	.1260	.1629	.0369	.0010		
	90,000	100,000	a	.1640	.1257	.1628	.0371	.0012		
	.....	.....	b	.1639	.1256	.1627	.0371	.0012		
	1,175,850	1,275,850	.....	.....	.....	.....	.....	.....		Bar ruptured 1".06 south of the south edge of north middle bearing.

No. 333. Marks, 7×1, 8.

Turned down from bar 1½" diameter. 0.26 per cent carbon. Oil tempered and annealed at high heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.	
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-loaded.				
Pounds 45,000	0	0	a	Inch. .1635	Inch. .1256	Inch. .1634	Inch. .0368	Inch. .0001		
	.....	.....	b	.1646	.1276	.1645	.0369	.0001		
	1,000	1,000	a	.1632	.1262	.1630	.0368	.0002		
	.....	.....	b	.1650	.1280	.1648	.0368	.0002		
	9,000	10,000	a	.1630	.1259	.1628	.0369	.0002		
	.....	.....	b	.1654	.1283	.1652	.0369	.0002		
	90,000	100,000	a	.1630	.1256	.1628	.0372	.0002		
	.....	.....	b	.1654	.1279	.1651	.0372	.0003		
	4,778,310	4,878,310	.....	.....	.....	.....	.....	.....		Bar ruptured 1".50 north of the north edge of south middle bearing.

No. 336. Marks,  $7 \times 2, 3$ .

Turned down from bar  $1\frac{1}{4}$ " diameter. 0.25 per cent carbon. Annealed at high heat.

Diameter, 1". Speed of rotation, 500 per minute.

Length between end supports, 33".

Loaded over 4" length at middle.

Deflections measured on chord of 10".

Maximum fiber stress per square inch.	Number of rotations.		Micrometer readings for deflections.				Deflections.	Sets.	Remarks.
	Successive.	Total.	On line.	Un-loaded.	Load-ed.	Un-load-ed.			
<i>Pounds.</i> 45,000	0	0	a	<i>Inch.</i> .1657	<i>Inch.</i> .1260	<i>Inch.</i> .1634	<i>Inch.</i> .0374	<i>Inch.</i> .0023	
			b	.1653	.1257	.1629	.0372	.0024	
	1,000	1,000	a	.1648	.1260	.1636	.0376	.0007	
			b	.1652	.1254	.1628	.0374	.0024	
	9,000	10,000	a	.1637	.1268	.1637	.0374	0.	
			b	.1652	.1253	.1628	.0375	.0024	
	90,000	100,000	a	.1658	.1268	.1640	.0372	.0018	
			b	.1647	.1252	.1628	.0376	.0019	
	535,600	635,600							



NO. 333.



NO. 336.

FRACTURED ENDS OF ENDURANCE SHAFTS.



ENDURANCE OF ROTATING SHAFTS.  
SUMMARIZED TABULATION.

Speed of rotation, 500 per minute.

No. of test.	Marks.	Material.	Treatment.	Composition.				Maxi- mum fiber stress per square inch.	Number of rotations.		Remarks.
				C.	Mn.	Si.	Ni.		Successive.	Total.	
300	9-C 1	Gaulier steel	Hot rolled bar	.82	.86	.10		Pounds. 30,000 35,000 40,000 45,000	49,467,800 10,000 10,000 133,640		49,477,800 rotations at 1,800 per minute, remainder at 500 per minute.
301	7 B 1 Y 1 1	Bethlehem steel	Treated bar	.82	1.20	.60		40,000 45,000 50,000 55,000	80,119,000 6,499,000 7,963,490 907,620	49,641,140	Ruptured at the south edge of north middle bearing. 80,119,000 rotations at 750 per minute, remainder at 500 per minute.
308	11-C 3	Gaulier steel	Hot rolled bar	1.09	.89	.11		40,000 45,000	130,500,000 1,017,800	131,517,800	Ruptured .50 south of south edge of south middle bearing. Ruptured .10 south of south edge of north middle bearing.
309	7-B 1	do	do	.73	.64	.04		40,000 45,000 50,000	150,000,000 9,500,000 854,050	159,854,050	Bar ruptured midway between north and south middle bearings.
310	9-C 2	do	do	.82	.86	.10		40,000 45,000	152,600,720 1,771,260	154,371,980	Bar ruptured 17.10 south of south edge of north middle bearing.
321	7×2, 1	Bethlehem steel	Annealed at low heat	.25	.66	.08	4.60	40,000 45,000	45,000,000 922,640	45,922,640	Ruptured .08 south of the north edge of north middle bearing.
322	N 9-E	Nickel-steel ingot	Natural state	.17	.68		3.25	10,000 15,000 20,000 25,000 30,000	10,000 11,000 11,000 11,000 85,840	128,840	Ruptured 17.25 north of north edge of south middle bearing.
323	C 9-E	Carbon-steel ingot	do	.20	.56			20,000	800,250	800,250	Ruptured .35 south of south edge of north middle bearing.
324	7×1, 3	Bethlehem steel	Annealed at high heat	.26	.52	.12	3.81	45,000	102,010	102,010	Ruptured .35 south of south edge of north middle bearing.



CHEMICAL ANALYSES, ENDURANCE SHAFTS.

CHEMICAL ANALYSES OF MATERIAL IN ENDURANCE SHAFTS.

WATERTOWN ARSENAL DETERMINATIONS.

No. of shaft.	Carbon.	Manganese.	Silicon.	Sulphur.	Phosphorus.	Copper.	Nickel.
280	.281	.522	.122	.048	.024	.038	3.264
282	.500	.980	.300	.080	.044	.200	27.601
284	.471	.661	.123	.030	.024		
286	.415	.552	.182	.080	.028		
288	.241	.660	.105	.085	.040		
290	.290	.763	.138	.085	.021	.072	5.758
292	.252	.652	.079	.029	.022	.057	4.550
298	.250	.642	.083	.032	.021	.056	4.50
294	.700	.450	.230	.040	.025		
321	.255	.645	.082	.027	.022	.055	4.601
324	.275	.550	.140	.050	.029	.036	3.310





---


**TENSILE SPECIMENS FROM ENDS OF RUPTURED  
ENDURANCE SHAFTS.**



TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

Specimens taken from the ends of the ruptured bars.

The marks give the test number of the endurance shaft, also the figures and letters which were employed to identify the grade and treatment of the metal.



No. 7492.

Bethlehem Steel, Nickel. Annealed.

Marks, 280, 7x1 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 578.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0008	0.		
10,000	.0010			
20,000	.0020			
30,000	.0030			
35,000	.0035			
40,000	.0040	0.		
50,000	.0050	0.		
55,000	.0055	.0001		Elastic limit. On reapplication of load, rapid elongation took place at about 55,000 pounds load.
50,000	.0410			
51,000	.0435			
52,000	.0460			
53,000	.0490			
54,000	.0540			
55,000	.0598	.0524		
56,000	.0658			
58,000	.0710			
60,000	.0850			
62,000	.0950			
64,000	.1090			
66,000	.1230			
68,000	.1430			
70,000	.1600			
72,000	.20			
74,000	.23			
76,000	.27			
78,000	.33			
79,840			Tensile strength. = 30 per cent.	
0	.90			

Elongation of inch sections, ".18, ".52, \* ".20.

Diameter at fracture, ".36; area, .1018 square inch.

Contraction of area, 59.3 per cent.

Fractured at middle of stem.

Appearance, fine silky.

No. 7493.

Bethlehem Steel, Nickel. Oil hardened and annealed.  
 Marks, 281, 7×1 HS.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".  
 For endurance test see Report of 1895, page 579.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0010	-----	
20,000	.0020	-----	
30,000	.0081	0.	
35,000	.0086	-----	
40,000	.0041	0.	
50,000	.0051	0.	
55,000	.0056	0.	
60,000	.0063	0.	
64,000	.0068	-----	Elastic limit.
65,000	.0076	.0011	
66,000	.0185	-----	
61,000	.0400	-----	
62,000	.0480	-----	
64,000	.0550	-----	
66,000	.0630	-----	
68,000	.0700	-----	
70,000	.0835	.0740	
72,000	.10	-----	
74,000	.11	-----	
76,000	.12	-----	
78,000	.14	-----	
80,000	.16	-----	
82,000	.18	-----	
84,000	.21	-----	
86,000	.25	-----	
88,000	.32	-----	
89,680	-----	-----	Tensile strength. = 25.3 per cent.
0	.76	-----	

Elongation of inch sections, ".14, ".19, ".43\*.  
 Diameter at fracture, ".35; area, .0962 square inch.  
 Contraction of area, 61.5 per cent.  
 Fractured 1".1 from the neck. Appearance, fine silky.

No. 7494.

Bethlehem Steel, Nickel. Annealed.

Marks, 282, 7×4 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 584.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0012	.....	
20,000	.0024	.....	
30,000	.0039	0.	
35,000	.0044	.....	
40,000	.0051	0.	
45,000	.0058	0.	
50,000	.0067	.0001	
54,000	.0072	.....	
55,000	.0079	.0009	
56,000	.0089	.....	
57,000	.0098	.....	
58,000	.0101	.....	
59,000	.0110	.....	
60,000	.0129	.0053	
61,000	.0139	.....	
62,000	.0178	.....	
63,000	.0190	.....	
64,000	.0280	.....	
65,000	.0292	.0207	
66,000	.0303	.....	
68,000	.0520	.....	
70,000	.0671	.....	
74,000	.10	.....	
78,000	.14	.....	
82,000	.17	.....	
86,000	.21	.....	
90,000	.26	.....	
94,000	.32	.....	
111,200	.....	.....	Tensile strength. = 35.7 per cent.
0	1.07	.....	

Elongation of inch sections, ".28, ".29, ".50\*.

Diameter at fracture, ".37; area, .1075 square inch.

Contraction of area, 57 per cent.

Fractured 1".1 from the neck. Appearance, fine silky, serrated.

284 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7495.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Marks, 283, 7×4 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 585.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	
1,000	0.	.0	Initial load.
5,000	.0005	.0	
10,000	.0011	.....	Elastic limit.
20,000	.0024	.....	
30,000	.0038	0.	
35,000	.0043	.....	
40,000	.0050	0.	
42,000	.0054	.....	
43,000	.0059	.....	
44,000	.0062	.....	
45,000	.0070	.0011	
46,000	.0108	.....	
47,000	.0135	.....	Tensile strength. = 44.3 per cent.
48,000	.0275	.....	
49,000	.0290	.....	
50,000	.0390	.0325	
52,000	.0575	.....	
54,000	.0772	.....	
56,000	.0925	.....	
60,000	.1358	.....	
64,000	.17	.....	
68,000	.21	.....	
70,000	.22	.....	
74,000	.27	.....	
78,000	.32	.....	
82,000	.37	.....	
86,000	.42	.....	
90,000	.49	.....	
94,000	.59	.....	
98,000	.71	.....	
103,520	.....	.....	
0	1.33	.....	

Elongation of inch sections, ".33, ".39, ".61\*.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured 1".1 from the neck. Appearance, fine silky

No. 7496.

Bethlehem Steel. Annealed.

Marks, 284, 7 × 7 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 588.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	.....	
35,000	.0035	.....	
40,000	.0040	0.	
45,000	.0047	0.	
48,000	.0060	.....	
49,000	.0061	.....	
50,000	.....	.....	
45,000	.0122	.....	
46,000	.0142	.....	
47,000	.0230	.....	
48,000	.0257	.....	
49,000	.0265	.....	
50,000	.0290	.....	
51,000	.0311	.....	
52,000	.0332	.....	
54,000	.0375	.....	Tensile strength. = 25 per cent.
56,000	.0422	.....	
60,000	.0525	.....	
64,000	.0689	.....	
68,000	.0760	.....	
72,000	.0910	.....	
76,000	.1087	.....	
80,000	.1325	.....	
84,000	.17	.....	
88,000	.21	.....	
92,000	.33	.....	
94,000	.....	.....	
0	.75	.....	

Elongation of inch sections, ".16, ".40\*, ".19.

Diameter at fracture, ".42; area, .1385 square inch.

Contraction of area, 44.6 per cent.

Fractured 1".56 from the neck. Appearance, silky.

286 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7497.

Bethlehem Steel. Oil hardened and annealed.

Marks, 285, 7×7 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 589.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	-----	
20,000	.0021	-----	
30,000	.0031	-----	
35,000	.0037	-----	
40,000	.0042	0.	
45,000	.0048	-----	
50,000	.0053	0.	
55,000	.0059	-----	
60,000	.0062	0.	
61,000	.0063	-----	
62,000	.0065	-----	
60,000	.0135	-----	
61,000	.0250	-----	
62,000	.0260	-----	
63,000	.0270	-----	
64,000	.0290	-----	
66,000	.0332	-----	
68,000	.0387	-----	
72,000	.0480	-----	
76,000	.0580	-----	
80,000	.0700	-----	
84,000	.0840	-----	
88,000	.0985	-----	
92,000	.1190	-----	
96,000	.15	-----	
100,000	.20	-----	
104,000	.31	-----	
105,120	-----	-----	Tensile strength.
0	.62	-----	=20.7 per cent.

Elongation of inch sections, ".13, ".13, ".36\*.

Diameter at fracture, ".40; area, .1257 square inch.

Contraction of area, 49.7 per cent.

Fractured ".9 from the neck. Appearance, silky, cup-shaped.



No. 7498.

Bethlehem Steel. Annealed.  
 Marks, 286, 7 × 6 S.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".  
 For endurance test see Report of 1895, page 587.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0009	.....	
20,000	.0019	.....	
30,000	.0029	.....	
35,000	.0084	.....	
40,000	.0089	0.	
44,000	.0048	.....	
45,000	.0044	.....	Elastic limit.
42,000	.0090	.....	
43,000	.0150	.....	
44,000	.0386	.....	
45,000	.0841	.....	
46,000	.0360	.....	
47,000	.0885	.....	
48,000	.0420	.....	
50,000	.0485	.....	
52,000	.0550	.....	
56,000	.0700	.....	
60,000	.0845	.....	
64,000	.1050	.....	
68,000	.1380	.....	
72,000	.1680	.....	
76,000	.22	.....	
80,000	.32	.....	
82,480	.....	.....	Tensile strength.
0	.87	.....	=29 per cent.

Elongation of inch sections, ".20, ".45\*, ".22.  
 Diameter at fracture, ".39; area, .1194 square inch.  
 Contraction of area, 52.2 per cent.  
 Fractured 1".5 from the neck. Appearance, silky.

No. 7499.

Bethlehem Steel. Oil hardened and annealed.

Marks, 287, 7×6 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 587.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0003	.....		
10,000	.0009	.....		
20,000	.0020	.....		
30,000	.0030	.....		
35,000	.0035	.....		
40,000	.0040	0.		
50,000	.0060	0.		
54,000	.0064	.....		
55,000	.0065	.....		
51,000	.0150	.....		Elastic limit. Load fell.
52,000	.0225	.....		
53,000	.0245	.....		
54,000	.0270	.....		
55,000	.0295	.....		
56,000	.0328	.....		
58,000	.0385	.....		
60,000	.0450	.....		
64,000	.0580	.....		
68,000	.0720	.....		
72,000	.0900	.....		
76,000	.1105	.....		
80,000	.1390	.....		
84,000	.18	.....		
88,000	.26	.....		
90,000	.....	.....	Tensile strength. =25 per cent.	
0	.75	.....		

Elongation of inch sections, ".15, ".22, ".38\*.

Diameter at fracture, ".36; area, .1018 square inch.

Contraction of area, 59.3 per cent.

Fractured 1".17 from the neck. Appearance, silky.

No. 7500.

Bethlehem Steel. Annealed.

Marks, 288, 7 × 5 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see report of 1895, page 586.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0008	0.		
10,000	.0009	.....		
20,000	.0019	.....		
30,000	.0029	.....		
35,000	.0033	.....		
40,000	.0039	0.		
41,000	.0040	.....		Elastic limit.
37,000	.0175	.....		
38,000	.0210	.....		
39,000	.0320	.....		
40,000	.0450	.....		
41,000	.0458	.....		
42,000	.0490	.....		
43,000	.0523	.....		
44,000	.0570	.....		
46,000	.0650	.....		
48,000	.0740	.....	Tensile strength. = 33 per cent.	
52,000	.0980	.....		
56,000	.1265	.....		
60,000	.17	.....		
64,000	.23	.....		
68,000	.33	.....		
70,880	.....	.....		
0	.99	.....		

Elongation of inch sections, ".22, ".55\*, ".22.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured 1".84 from the neck. Appearance, silky.

H. Doc. 335—19

No. 7501.

Bethlehem Steel. Oil hardened and annealed.

Marks, 289, 7 × 5 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 586.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0081	.....	
35,000	.0086	.....	
40,000	.0040	0.	Elastic limit
44,000	.0048	.....	
45,000	.0070	.....	
40,000	.0110	.....	
41,000	.0140	.....	
42,000	.0285	.....	
43,000	.0806	.....	
44,000	.0850	.....	
45,000	.0880	.....	
46,000	.0430	.....	
48,000	.0615	.....	
52,000	.0700	.....	
56,000	.0980	.....	
60,000	.1210	.....	
64,000	.16	.....	
68,000	.22	.....	
72,000	.47	.....	
72,080	.....	.....	Tensile strength.
0	.92	.....	= 30.7 per cent.

Elongation of inch sections, ".27, ".49\*, ".16.

Diameter at fracture, ".31; area, .0755 square inch.

Contraction of area, 69.8 per cent.

Fractured 1".5 from the neck. Appearance, silky

No. 7502.

Bethlehem Steel, Nickel. Annealed.  
 Marks, 290, 7×3 S.  
 Diameter, ".564.  
 Sectional area, .25 square inch  
 Gauged length, 3".  
 For endurance test see Report of 1895, page 582.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0061	.....	
35,000	.0086	.....	
40,000	.0041	0.	
50,000	.0052	0.	
60,000	.0063	0.	
65,000	.0069	0.	
70,000	.0073	0.	
75,000	.0079	0.	
78,000	.0065	.....	
79,000	.0068	.....	
80,000	.0109	.0021	
81,000	.0128	.....	
82,000	.0210	.....	
83,000	.0260	.....	
84,000	.0320	.....	
88,000	.0575	.....	
92,000	.0820	.....	
96,000	.1045	.....	
100,000	.1390	.....	
104,000	.18	.....	
108,000	.32	.....	Tensile strength. =19 per cent.
0	.57	.....	

Elongation of inch sections: ".37", ".11", ".09.  
 Diameter at fracture, ".37; area, .1075 square inch.  
 Contraction of area, 57 per cent.  
 Fractured ".9 from the neck. Appearance, fine silky.

No. 7503.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Marks, 291, 7×3 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 583.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
1,000	0.	0.		
5,000	.0003	0.		
10,000	.0010	.....		
20,000	.0020	.....		
30,000	.0031	.....		
40,000	.0041	0.		
50,000	.0052	0.		
60,000	.0061	0.		
70,000	.0071	0.		
75,000	.0076	0.		
80,000	.0081	0.		
90,000	.0091	0.		
100,000	.0101	0.		
108,000	.0108	.....		
109,000	.0110	.....		Elastic limit.
110,000	.0190	.....		
111,000	.0480	.....		
112,000	.0590	.....		
114,000	.0880	.....		
116,000	.0850	.....		
118,000	.11	.....		
120,000	.13	.....		
124,000	.19	.....		
125,760	.....	.....	Tensile strength.	
0	.65	.....	=18.3 per cent.	

Elongation of inch sections: ".35\*, ".12, ".08.

Diameter of fracture, ".35, area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured ".95 from the neck. Appearance, fine silky, serrated.

No. 7504.

Bethlehem Steel, Nickel. Annealed.

Marks, 292, 7 × 2 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 580.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0031	.....	
35,000	.0036	.....	
40,000	.0041	0.	
50,000	.0061	0.	
60,000	.0062	0.	
62,000	.0065	.....	Elastic limit.
61,000	.0390	.....	
62,000	.0450	.....	
63,000	.0470	.....	
64,000	.0520	.....	
66,000	.0560	.....	
68,000	.0640	.....	
72,000	.0640	.....	
76,000	.1050	.....	
80,000	.1320	.....	
84,000	.18	.....	
88,000	.23	.....	
92,000	.35	.....	
92,880	.....	.....	Tensile strength.
0	.75	.....	= 25 per cent.

Elongation of inch sections: ".15, ".25, ".35\*.

Diameter at fracture, ".37; area, .1075 square inch.

Contraction of area, 57 per cent.

Fractured 1".25 from the neck: Appearance, fine silky, cup-shaped.

No. 7505.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Marks, 293, 7 × 2 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 581.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	.....	
40,000	.0040	0.	
50,000	.0061	0.	
60,000	.0061	0.	
70,000	.0071	0.	
80,000	.0081	0.	
90,000	.0091	0.	Elastic limit.
100,000	.0101	0.	
101,000	.0103	.....	
97,000	.0150	.....	
98,000	.0190	.....	
99,000	.0310	.....	
100,000	.0520	.....	
101,000	.0600	.....	
102,000	.0650	.....	
104,000	.0835	.....	
106,000	.0973	.....	Tensile strength. = 19 per cent.
108,000	.1140	.....	
112,000	.1500	.....	
116,000	.24	.....	
116,800	.....	.....	
0	.57	.....	

Elongation of inch sections: ".10, ".17, ".30\*.

Diameter at fracture, ".36; area, .1018 square inch.

Contraction of area, 59.3 per cent.

Fractured 1".15 from neck. Appearance, fine silky, serrated.



No. 7506.

Bethlehem Steel. Annealed. .

Marks, 294, 7×8 S.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see Report of 1895, page 590.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0009	.....	
20,000	.0019	.....	
30,000	.0029	.....	
40,000	.0039	0.	
50,000	.0049	0.	
56,000	.0057	.....	Elastic limit.
57,000	.0075	.....	
58,000	.0089	.....	
59,000	.0102	.....	
60,000	.0112	.0043	
61,000	.0123	.....	
62,000	.0137	.....	
64,000	.0160	.....	
68,000	.0220	.....	
72,000	.0275	.....	
76,000	.0330	.....	
80,000	.0390	.....	
84,000	.0455	.....	
88,000	.0530	.....	
92,000	.0608	.....	
96,000	.0680	.....	
100,000	.0786	.....	
104,000	.09	.....	
108,000	.10	.....	
112,000	.12	.....	
116,000	.13	.....	
120,000	.15	.....	
124,000	.19	.....	
127,760	.....	.....	Tensile strength.
0	.35	.....	=11.7 per cent.

Elongation of inch sections: ".08, ".10, ".17\*.

Diameter at fracture, ".50; area, .1964 square inch.

Contraction of area, 21.4 per cent.

Fractured ".8 from the neck. Appearance, granular, dull silky spot near the center.

No. 7507.

Bethlehem Steel. Oil hardened and annealed.

Marks, 295, 7×8 HS.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3."

For endurance test see Report of 1895, page 591.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load	
5,000	.0004	0.		
10,000	.0010	0.		
20,000	.0020	0.		
30,000	.0030	0.		
40,000	.0040	0.		
50,000	.0050	0.		
60,000	.0061	0.		
70,000	.0071	0.		
80,000	.0081	0.		
82,000	.0084	0.		Elastic limit.
83,000	.0089	0.		
84,000	.0099	0.		
85,000	.0113	0.		
86,000	.0129	0.		
88,000	.0140	0.		
90,000	.0158	0.		
92,000	.0178	0.		
96,000	.0230	0.		
100,000	.0288	0.		
104,000	.0342	0.		
108,000	.0400	0.		
112,000	.0460	0.		
116,000	.0540	.0450		
120,000	.0608	0.		
128,000	.08	0.		
136,000	.10	0.		
144,000	.13	0.		
152,000	.25	0.		
0	.38	0.	Tensile strength. = 12.7 per cent.	

Elongation of inch sections: ".08, ".17\*, ".13\*.

Diameter at fracture, ".47; area, .1735 square inch.

Contraction of area, 30.6 per cent.

Fractured 1".13 from the neck. Appearance, fine granular, dull silky spot at center.

No. 7508.

Gautier Steel. Hot rolled bar.

Marks, 300, 9-C1.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test, see present Report, page 259.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	.....	
40,000	.0040	0.	
50,000	.0050	0.	
60,000	.0060	0.	Elastic limit.
66,000	.0067	.....	
67,000	.0073	.....	
68,000	.0111	.....	
69,000	.0120	.....	
70,000	.0136	.....	
72,000	.0160	.....	
74,000	.0178	.....	
76,000	.0196	.....	
78,000	.0215	.0130	
80,000	.0235	.....	
84,000	.0280	.....	
88,000	.0335	.....	
92,000	.0388	.....	
96,000	.0443	.....	
100,000	.0500	.0349	
104,000	.06	.....	
108,000	.07	.....	
116,000	.08	.....	
124,000	.10	.....	
132,000	.12	.....	
140,000	.16	.....	
147,600	.....	.....	Tensile strength.
0	.27	.....	=9 per cent.

Elongation of inch sections: ".08, ".11\*, ".08\*.

Diameter at fracture, ".54; area, .2290 square inch.

Contraction of area, 8.4 per cent.

Fractured 1".2 from the neck. Appearance, fine granular.

No. 7563.

Bethlehem Steel. Treated bar

Marks, 301, 7 B17 Y 1-1.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test, see present Report, page 260.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0031	.....	
40,000	.0041	0.	
50,000	.0051	.....	
60,000	.0061	0.	
70,000	.0071	0.	
80,000	.0080	0.	
90,000	.0090	0.	
91,000	.0092	.....	Elastic limit.
92,000	.0146	.....	
93,000	.0154	.....	
94,000	.0162	.....	
95,000	.0180	.....	
96,000	.0199	.....	
98,000	.0240	.....	
100,000	.0300	.0188	
102,000	.0360	.....	
104,000	.0410	.....	
106,000	.0475	.....	
110,000	.0600	.0462	
114,000	.07	.....	
120,000	.09	.....	
124,000	.12	.....	
128,000	.15	.....	
130,400	.....	.....	Tensile strength.
0	.35	.....	= 11.7 per cent.

Elongation of inch sections: ".04, ".04, ".27\*.

Diameter at fracture, ".40; area, .1257 square inch.

Contraction of area, 49.7 per cent.

Fractured ".4 from the neck. Appearance, fine silky, serrated.

Load at time of fracture, 25,200 pounds = 200,480 pounds per square inch on area at rupture.

No. 7509.

Gautier Steel. Hot rolled bar.  
 Marks, 308, 11-C3.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".  
 For endurance test see present Report, page 261.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	0.	
20,000	.0020	0.	
30,000	.0080	0.	
40,000	.0040	0.	
50,000	.0050	0.	
60,000	.0060	0.	
70,000	.0070	0.	
74,000	.0074	0.	
78,000	.0152	0.	
74,000	.0200	0.	
75,000	.0248	0.	
76,000	.0256	0.	
78,000	.0298	0.	
79,000	.0320	0.	
80,000	.0842	0.	
84,000	.0884	0.	
88,000	.0438	0.	
92,000	.0480	.0418	Tensile strength. = 2.3 per cent.
96,000	.0530	0.	
100,000	.0590	0.	
108,000	.07	0.	
115,400	.07	0.	

Elongation of inch sections: ".02, ".02, ".03\*.  
 Diameter at fracture, ".56; area, .2463 square inch.  
 Contraction of area, 1.5 per cent.  
 Fractured ".3 from the neck. Appearance, fine granular.

300 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7544.

Gautier Steel. Hot rolled bar.  
 Marks, 309, 7-B1.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".  
 For endurance test see present Report, page 263.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	.....	
40,000	.0040	0.	
45,000	.0046	.....	
50,000	.0051	0.	
60,000	.0062	.0001	
63,000	.0066	.....	
64,000	.0072	.....	
65,000	.0089	.....	
66,000	.0100	.....	
67,000	.0110	.....	
68,000	.0118	.....	
70,000	.0139	.0051	
72,000	.0160	.....	
76,000	.0205	.....	
80,000	.0248	.0151	
84,000	.0310	.....	Tensile strength. =10 per cent.
88,000	.0370	.....	
92,000	.0433	.....	
96,000	.0500	.....	
100,000	.0576	.0421	
108,000	.07	.....	
116,000	.09	.....	
124,000	.12	.....	
136,000	.22	.....	
139,120	.....	.....	
0	.30	.....	

Elongation of inch sections: ".13\*, ".10, ".07.  
 Diameter at fracture, ".52; area, .2124 square inch.  
 Contraction of area, 15 per cent.  
 Fractured 1" from the neck. Appearance, fine granular.

No. 7510.

Gautier Steel. Hot rolled bar.

Marks, 310, 9-C 2.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 264.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0008	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0080	.....	
40,000	.0040	0.	
50,000	.0050	0.	
60,000	.0060	0.	
67,000	.0069	.....	
68,000	.0108	.....	
69,000	.0117	.....	
70,000	.0126	.0042	
72,000	.0143	.....	
74,000	.0162	.....	
76,000	.0188	.....	
80,000	.0228	.....	
84,000	.0272	.....	
88,000	.0321	.....	
92,000	.0372	.....	
96,000	.0424	.0338	Tensile strength. = 9 per cent.
100,000	.0490	.....	
106,000	.07	.....	
116,000	.08	.....	
124,000	.09	.....	
132,000	.12	.....	
140,000	.16	.....	
147,600	.....	.....	
0	.27	.....	

Elongation of inch sections: ".09, ".10\*, ".08.

Diameter at fracture, ".53; area, .2206 square inch.

Contraction of area, 11.8 per cent.

Fractured 1".37 from the neck. Appearance, fine granular.

302 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7511.

Bethlehem Steel. Annealed at low heat.  
 Marks, 321, 7×2, 1.  
 Diameter, ".564.  
 Sectional area, .25 square inch.  
 Gauged length, 3".  
 For endurance test see present Report, page 266.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0009		
20,000	.0019		
30,000	.0030		
35,000	.0035		
40,000	.0041	0.	
45,000	.0047	0.	
50,000	.0051	0.	
55,000	.0056	0.	
60,000	.0061	0.	
65,000	.0068	.0001	Elastic limit.
66,000	.0071		
67,000	.0074		
68,000	.0078		
69,000	.0090		
70,000	.0190	.0111	
72,000	.0280		
74,000	.0375		
76,000	.0450		
80,000	.0608	.0500	
84,000	.08		
88,000	.10		
92,000	.12		
96,000	.15		
100,000	.20		
104,000	.30		
104,800			Tensile strength.
0	.49		=16.3 per cent.

Elongation of inch sections: ".31", ".09, ".09.  
 Diameter at fracture, ".43; area, .1452 square inch.  
 Contraction of area, 41.9 per cent.  
 Fractured, ".75 from the neck. Appearance, fine silky, cup-shaped.



No. 7512.

Metal from Nickel Steel Ingot. Natural state.

Marks, 322, N3-E.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 267.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load
5,000	.0008	0.	
10,000	.0010	0.	
15,000	.0015	0.	
20,000	.0020	0.	
25,000	.0026	0.	
30,000	.0033	.0001	Elastic limit.
31,000	.0036	.....	
32,000	.0040	.....	
33,000	.0043	.....	
34,000	.0050	.....	
35,000	.0058	.0018	
36,000	.0067	.....	
37,000	.0077	.....	
38,000	.0093	.....	
39,000	.0120	.....	
40,000	.0168	.0119	
42,000	.0250	.....	
44,000	.0360	.....	
46,000	.0455	.....	
48,000	.0580	.....	
50,000	.0772	.0708	
52,000	.10	.....	
53,200	.....	.....	Tensile strength.
0	.16	.....	=5.3 per cent.

Elongation of inch sections: ".10", ".03", ".03.

Diameter at fracture, ".53; area, .2206 square inch.

Contraction of area, 11.8 per cent.

Fractured ".9 from the neck. Appearance, 40 per cent granular with lustrous facets; 60 per cent dull amorphous.

304 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7513.

Metal from Carbon Steel Ingot. Natural state.

Marks, 323, C3-E.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 268.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0010	0.	
15,000	.0015	0.	Elastic limit.
16,000	.0021		
17,000	.0036		
18,000	.0053		
19,000	.0063		
20,000	.0090	.0067	
21,000	.0109		
22,000	.0147		
23,000	.0172		
24,000	.0218		
25,000	.0241	.0211	
26,000	.0290		
28,000	.0372		
30,000	.0485	.0448	
32,000	.06		
34,000	.07		
36,000	.09		
38,000	.10		
40,000	.12		
42,000	.14		
44,000	.17		
46,000	.20		
48,000	.24		
50,000	.30		
51,600			Tensile strength.
0	.40		=13.3 per cent.

Elongation of inch sections: ".12, ".13, ".15\*.

Diameter at fracture, ".52; area, .2124 square inch.

Contraction of area, 15 per cent.

Fractured 1".24 from the neck. Appearance, 40 per cent granular, 60 per cent irregular surface, amorphous.

No. 7514.

Bethlehem Steel. Annealed at high heat.

Marks, 324, 7 × 1, 3.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 268.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0003	0.	
10,000	.0010	.....	Elastic limit.
20,000	.0020	.....	
30,000	.0031	.....	
40,000	.0041	0.	
45,000	.0046	0.	
50,000	.0051	0.	
51,000	.0053	.....	
46,000	.0111	.....	
47,000	.0170	.....	
48,000	.0215	.....	
49,000	.0235	.....	
50,000	.0507	.0443	
52,000	.0682	.....	
56,000	.0930	.....	
58,000	.1073	.....	
60,000	.1218	.1139	
62,000	.15	.....	
64,000	.17	.....	
68,000	.22	.....	
72,000	.31	.....	
75,200	.....	.....	Tensile strength.
0	.81	.....	= 27 per cent.

Elongation of inch sections: ".13, ".19, ".49\*.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured 1" from the neck. Appearance, fine silky, cup-shaped.

H. Doc. 335—20

No. 7515.

Metal from Nickel Steel Ingot. Oil tempered and annealed.

Marks, 325, N3-D.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 269.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0008	0.		
10,000	.0010	0.		
15,000	.0015	0.		
20,000	.0020	0.		
25,000	.0026	0.		
30,000	.0031	0.		
35,000	.0036	0.		
40,000	.0042	0.		
45,000	.0047	0.		
50,000	.0052	0.		
55,000	.0058	0.		Elastic limit.
56,000	.0140	.....		
57,000	.0220	.....		
58,000	.0329	.....		
59,000	.0372	.....		
60,000	.0440	.0968		
62,000	.0480	.....		
64,000	.0657	.....		
68,000	.09	.....		
72,000	.13	.....		
76,000	.18	.....		
80,000	.29	.....	Tensile strength. =13.7 per cent.	
80,800	.41	.....		

Elongation of inch sections: ".16, ".10, ".15\*.

Diameter at fracture, ".47; area, .1735 square inch.

Contraction of area, 30.6 per cent.

Fractured 1".5 from the neck. Appearance, dull amorphous, light and dark colored patches. Opened cracks in surface of stem.

No. 7564.

Metal from Carbon Steel Ingot. Oil tempered and annealed.

Marks, 327, C3-D.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 270.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010		
20,000	.0020		
30,000	.0081	0.	Elastic limit.
35,000	.0087	0.	
40,000	.0041	0.	
41,000	.0042		
42,000	.0045		
43,000	.0048		
44,000	.0870		
45,000	.0876		
46,000	.0400		
47,000	.0440		
48,000	.0480		
49,000	.0532		
50,000	.0580	.0512	
52,000	.07		
56,000	.10		
60,000	.12		
64,000	.16		
68,000	.24		
69,680			Tensile strength. = 12.7 per cent.
0	.38		

Elongation of inch sections: ".13, ".16\*, ".09.

Diameter at fracture, ".50; area, .1964 square inch.

Contraction of area, 21.4 per cent.

Fractured 1".3 from the neck. Appearance, dull gray, amorphous. Pitted surface. Opened cracks along surface of stem.

No. 7541.

Bethlehem Steel. Oil tempered and annealed at low heat.

Marks, 328, 7 × 2, 5.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 271.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	.0004	0.	
10,000	.0011	.....	
20,000	.0021	.....	
30,000	.0031	0.	
40,000	.0041	0.	
45,000	.0046	.....	
50,000	.0051	0.	
55,000	.0059	0.	
60,000	.0066	.0001	
65,000	.0073	.0008	
68,000	.0082	.....	
69,000	.0087	.....	
70,000	.0110	.0033	
71,000	.0280	.....	
72,000	.0330	.....	
74,000	.0440	.....	
76,000	.0512	.....	
78,000	.0622	.....	
80,000	.0749	.0648	
84,000	.09	.....	
88,000	.18	.....	
92,000	.17	.....	
96,000	.22	.....	
100,000	.29	.....	
102,400	.....	.....	
0	.81	.....	
			Tensile strength. = 27 per cent.

Elongation of inch sections: ".17, ".48\*, ".16.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured at the middle of the stem. Appearance, fine silky.

No. 7542.

Bethlehem Steel. Oil tempered and annealed at low heat.

Marks, 329, 7×1, 5.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 271.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0020	.....	
30,000	.0030	.....	
40,000	.0041	0.	
45,000	.0046	.....	
50,000	.0051	.0001	
54,000	.0058	.....	Elastic limit. Load fell.
50,000	.0300	.....	
51,000	.0370	.....	
52,000	.0395	.....	
53,000	.0432	.....	
54,000	.0492	.0426	
55,000	.0563	.....	
58,000	.0687	.....	
60,000	.0804	.0726	
64,000	.10	.....	
68,000	.13	.....	
72,000	.17	.....	
76,000	.22	.....	
80,000	.40	.....	
80,800	.....	.....	Tenalle strength.
0	.87	.....	= 29 per cent.

Elongation of inch sections: ".18, ".52\*, ".17.

Diameter at fracture, ".31; area, .0755 square inch.

Contraction of area, 69.8 per cent.

Fractured 1".8 from the neck. Appearance, fine silky.

310 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7543.

Bethlehem Steel. Annealed at low heat.

Marks, 330, 7×1, 2.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 272.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	.0003	0.		
10,000	.0010	.....		
20,000	.0020	.....		
30,000	.0031	.....		
35,000	.0036	.....		
40,000	.0041	.....		
45,000	.0046	.....		
50,000	.0052	0.		
55,000	.0058	0.		
57,000	.0060	.....		Elastic limit. Load fell.
52,000	.0132	.....		
53,000	.0144	.....		
54,000	.0250	.....		
55,000	.0328	.....		
56,000	.0362	.....		
58,000	.0450	.....		
60,000	.0761	.0682		
64,000	.09	.....		
68,000	.12	.....		
72,000	.15	.....		
76,000	.20	.....		
80,000	.28	.....		
82,600	.....	.....	Tensile strength. =20.7 per cent.	
0	.62	.....		

Elongation of inch sections: ".35", ".17", ".10.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured, 1".2 from the neck. Appearance, fine silky.



No. 7545.

Bethlehem Steel. Annealed at high heat.

Marks, 331, 7 × 1, 4.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 272.<sup>a</sup>

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0031	.....	
40,000	.0041	0.	
45,000	.0046	0.	
49,000	.0052	.....	Elastic limit. Load fell.
44,000	.0130	.....	
45,000	.0230	.....	
46,000	.0309	.....	
47,000	.0352	.....	
48,000	.0400	.....	
49,000	.0445	.....	
50,000	.0540	.0478	
52,000	.0715	.....	
54,000	.0810	.....	
56,000	.0940	.....	
58,000	.1065	.....	
60,000	.1230	.....	
64,000	.17	.....	
68,000	.22	.....	
72,000	.32	.....	
74,800	.....	.....	Tensile strength.
0	.83	.....	=27.7 per cent.

Elongation of inch sections: ".33\*", ".37\*", ".13.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured 1".47 from the neck. Appearance, fine silky.

312 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7565.

Bethlehem Steel. Oil tempered and annealed at low heat.

Marks, 332, 7×1, 6.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 273.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010	.....	
20,000	.0021	.....	
30,000	.0032	.0001	
35,000	.0038	.....	
40,000	.0043	.0001	
45,000	.0049	.0001	
50,000	.0054	.0001	
55,000	.0059	.0001	Elastic limit. Load fell.
49,000	.0350	.....	
50,000	.0400	.....	
51,000	.0472	.....	
52,000	.0500	.....	
54,000	.0598	.....	
55,000	.0670	.0000	
60,000	.10	.....	
64,000	.13	.....	
68,000	.17	.....	
72,000	.23	.....	
76,000	.35	.....	
77,680	.....	.....	Tensile strength.
0	.90	.....	= 30 per cent.

Elongation of inch sections: ".17, ".49\*, ".24.

Diameter at fracture, ".31; area, .0755 square inch.

Contraction of area, 69.8 per cent.

Fractured 1".6 from the neck. Appearance, fine silky.

No. 7586.

Bethlehem Steel. Oil tempered and annealed at high heat.

Marks, 333, 7×1, 8.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 273.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0010		
20,000	.0020		
30,000	.0031		
40,000	.0042	0.	
45,000	.0048	0.	
50,000	.0056	0.	
55,000	.0061	0.	
60,000	.0068	0.	
62,000	.0069		Elastic limit. Load fell.
63,000	.0070		
58,000	.0108		
59,000	.0140		
60,000	.0440		
62,000	.0510		
64,000	.0580		
66,000	.0665		
68,000	.0770		
70,000	.0849	.0752	
72,000	.0915		Tensile strength. = 24.7 per cent.
75,000	.13		
80,000	.16		
84,000	.21		
88,000	.35		
88,960	.74		

Elongation of inch sections: ".14, ".44\*, ".16.

Diameter at fracture, ".35; area, .0962 square inch.

Contraction of area, 61.5 per cent.

Fractured 1".6 from the neck. Appearance, fine silky, cup-shaped.

314 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No 7587.

Bethlehem Steel. Annealed at high heat.

Marks, 336, 7×2, 3.

Diameter, ".564.

Sectional area, .25 square inch.

Gauged length, 3".

For endurance test see present Report, page 274.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0004	0.	
10,000	.0009	.....	
20,000	.0020	.....	
30,000	.0080	.....	
40,000	.0041	.0001	Elastic limit.
41,000	.0045	.....	
42,000	.0047	.....	
43,000	.0051	.....	
44,000	.0058	.....	
45,000	.0058	.0009	
46,000	.0064	.....	
47,000	.0070	.....	
48,000	.0080	.....	
49,000	.0091	.....	
50,000	.0120	.0062	
52,000	.0169	.....	
54,000	.0240	.....	
56,000	.0800	.....	
58,000	.0865	.....	
60,000	.0448	.0371	
64,000	.0605	.....	
68,000	.0690	.....	
72,000	.0780	.....	
76,000	.0972	.....	
80,000	.1470	.....	
84,000	.21	.....	
88,000	.28	.....	
91,280	.....	.....	Tensile strength.
0	.70	.....	= 28.8 per cent.

Elongation of inch sections: ".13, ".19, ".38".

Diameter at fracture, ".40; area, .1257 square inch.

Contraction of area, 49.7 per cent.

Fractured 1".1 from the neck. Appearance, fine silky, cup-shaped.

TABULATION OF TENSION SPECIMENS FROM ENDS OF BARS RUPTURED BY ENDURANCE TESTS OF ROTATING SHAFTS.  
 Gauged length, 3".


Ten- sion test num- ber.	Endur- ance test num- ber.	Description.	Car- bon.	Sec- tional area.	Elastic limit per square inch.	Tensile strength per square inch.	Elonga- tion in 3".	Contra- ction of area.	Elongation of inch sec- tions.	Appearance of fracture.
7482	280	Annealed	.26	.25	55,000	78,840	30.0	59.3	18, 52*, 20	Fine silky.
7488	281	Oil hardened and annealed	.26	.25	64,000	86,880	26.8	61.5	14, 19, 43*	Do.
7494	282	Annealed	.589	.25	54,000	111,200	35.7	57.0	28, 29, 50*	Fine silky serrated.
7495	283	Oil hardened and annealed	.589	.25	42,000	103,520	44.8	61.5	33, 39, 61*	Fine silky.
7496	284	Annealed	.46	.25	49,000	94,080	25.0	44.6	16, 40*, 19	Silky.
7497	285	Oil hardened and annealed	.46	.25	62,000	105,120	20.7	49.7	13, 13, 38*	Silky, cup-shaped.
7498	286	Annealed	.42	.25	45,000	82,480	29.0	52.2	20, 45*, 22	Silky.
7499	287	Oil hardened and annealed	.42	.25	55,000	90,000	25.0	59.3	15, 22, 38*	Do.
7500	288	Annealed	.24	.25	41,000	70,880	33.0	61.5	22, 55*, 22	Do.
7501	289	Oil hardened and annealed	.24	.25	44,000	72,080	30.7	69.8	27, 49*, 16	Do.
7502	290	Annealed	.29	.25	78,000	108,000	19.0	57.0	37*, 11, .09	Fine silky.
7503	291	Oil hardened and annealed	.29	.25	109,000	125,760	18.3	61.5	35*, 12, .08	Fine silky, serrated.
7504	292	Annealed	.25	.25	62,000	92,880	25.0	57.0	15, 25, 35*	Fine silky, cup-shaped.
7505	293	Oil hardened and annealed	.25	.25	101,000	116,800	19.0	59.3	10, 17, 30*	Fine silky, serrated.
7506	294	Annealed	.66	.25	56,000	127,760	11.7	21.4	08, 10, 17*	Granular, dull silky spot near center.
7507	295	Oil hardened and annealed	.66	.25	82,000	152,000	12.7	30.6	06, 17*, 13*	Fine granular; dull silky spot at center.
7508	300	Rolled bar	.82	.25	66,000	147,000	9.0	8.4	08, 11*, 08*	Fine granular.
7509	301	Treated bar	1.09	.25	91,000	180,400	11.7	49.7	04, 04, 27*	Fine silky, serrated.
7510	302	Rolled bar	.73	.25	74,000	116,400	2.3	1.6	02, 02, 03*	Fine granular.
7511	303	do	.82	.25	63,000	139,120	10.0	15.0	13*, 10, .07	Do.
7512	304	do	.82	.25	67,000	147,800	9.0	11.8	06, 10*, 08	Do.
7513	321	Annealed at low heat	.25	.25	65,000	104,800	16.3	41.9	31*, 09, .09	Fine silky, cup-shaped.
7514	322	From nickel steel ingot, natural state	.17	.25	80,000	58,200	5.3	11.8	10*, 08, .08	40 per cent granular with lustrous facets; 60 per cent dull amorphous.

TABULATION OF TENSION SPECIMENS FROM ENDS OF BARS RUPTURED BY ENDURANCE TESTS, ETC.—Continued.

Ten- sion test num- ber.	Endur- ance test num- ber.	Description.	Car- bon.	Sec- tion- al area.	Elastic limit per square inch.	Tensile strength per square inch.	Elonga- tion in 3".	Contra- ction of area.	Elongation of inch sec- tions.	Appearance of fracture.
			Per ct.	Sq. in.	Pounds.	Pounds.	Per ct.	Per ct.	" "	" "
7513	323	From carbon steel ingot, natural state .....	.20	.25	15,000	51,600	13.3	15.0	.12, .13, .15*	Irregular surface, amorphous.
7514	324	Annealed at high heat .....	.26	.25	51,000	75,200	27.0	61.5	.13, .19, .49*	Fine silky, cup-shaped.
7515	325	From nickel steel ingot, oil tempered and an- nealed.	.17	.25	55,000	80,800	13.7	30.6	.16, .10, .15*	Dull amorphous; light and dark colored patches; opened cracks in surface of stem.
7564	327	From carbon steel ingot, oil tempered and an- nealed.	.20	.25	41,000	69,680	12.7	21.4	.13, .16*, .09	Dull gray, amorphous; pitted sur- face; opened cracks along surface of stem.
7541	328	Oil tempered and annealed at low heat .....	.25	.25	65,000	102,400	27.0	61.5	.17, .48*, .16	Fine silky.
7542	329	.....do .....	.26	.25	54,000	80,800	29.0	69.8	.16, .52*, .17	Do.
7543	330	Annealed at low heat .....	.26	.25	57,000	82,600	20.7	61.5	.35*, .17, .10	Do.
7545	331	Annealed at high heat .....	.26	.25	49,000	74,800	27.7	61.5	.83*, .37*, .13	Do.
7565	332	Oil tempered and annealed at low heat .....	.26	.25	56,000	77,680	30.0	69.8	.17, .49*, .24	Do.
7586	333	Oil tempered and annealed at high heat .....	.26	.25	63,000	88,960	24.7	61.5	.14, .44*, .16	Fine silky, cup-shaped.
7587	336	Annealed at high heat .....	.25	.25	40,000	91,280	23.3	49.7	.18, .19, .38*	Do.

ANNULAR TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

The marks give the test number of the endurance shaft, also the figures and letters which were employed to identify the grade and treatment of the metal.



No. 7588.

Bethlehem Steel, Nickel. Annealed.

Specimen from end of shaft.

Marks, 280, 7 x 1 S.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 578.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
1,000	0.	0.		
5,000	0.	0.		
10,000	.0001	.....		
20,000	.0004	.....		
30,000	.0008	.....		
35,000	.0010	.....		
40,000	.0011	0.		
45,000	.0012	0.		
50,000	.0014	0.		
53,000	.0016	.....		
54,000	.0050	.....		Elastic limit.
55,000	.0185	.....		
56,000	.0149	.....		
57,000	.0156	.....		
58,000	.0169	.....		
59,000	.0180	.....		
60,000	.0200	.....		
65,000	.0209	.....		
70,000	.0291	.....		
86,440	.0391	.0865	Tensile strength.	

Elongation of inch section: ".36.

Exterior diameter at fracture, ".80.

Appearance of fracture, silky.

318 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7589.

Bethlehem Steel, Nickel. Annealed.  
 Specimen from middle of length of shaft.  
 Marks, 280, 7×1 S.

Diameters, { exterior, 1".  
 interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 578.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	0.	.....	
10,000	.0001	.....	
20,000	.0004	.....	
30,000	.0009	.....	
35,000	.0010	.....	
40,000	.0011	0.	
45,000	.0013	0.	
46,000	.0014	.....	
47,000	.0015	.....	
48,000	.0017	.....	
49,000	.0020	.....	
50,000	.0024	.0009	
51,000	.0091	.....	
52,000	.0130	.....	
58,000	.0148	.....	
54,000	.0156	.....	
55,000	.0177	.0155	
56,000	.0183	.....	
57,000	.0191	.....	
58,000	.0208	.....	
59,000	.0230	.....	
60,000	.0248	.0222	
65,000	.0330	.....	
70,000	.0461	.0430	
83,220	.....	.....	Tensile strength.

Elongation of inch section: ".33.

Exterior diameter at fracture, ".80.

Appearance of fracture, silky.



No. 7590.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 281, 7×1 HS.

Diameters { exterior, 1".  
interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 579.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.	.....	
10,000	.0001	.....	
20,000	.0005	.....	
30,000	.0009	.....	
35,000	.0011	.....	
40,000	.0012	0.	
45,000	.0013	.....	
50,000	.0014	0.	
55,000	.0016	.....	
60,000	.0018	0.	Elastic limit.
61,000	.0027	.....	
62,000	.0059	.....	
63,000	.0120	.....	
64,000	.0140	.....	
65,000	.0153	.0128	
66,000	.0161	.....	
68,000	.0180	.....	
70,000	.0210	.0182	
72,000	.0241	.....	
74,000	.0270	.....	
76,000	.0308	.....	
78,000	.0341	.....	
80,000	.0398	.0360	Tensile strength.
94,770	.....	.....	

Elongation of inch section: ".33.

Exterior diameter at fracture, ".81.

Appearance of fracture, silky.

No. 7591.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from middle of length of shaft.

Marks, 281, 7×1 HS.

Diameters { exterior, 1".  
interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 579.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0001	.....	
10,000	.0008	.....	
20,000	.0008	.....	
30,000	.0010	.....	
35,000	.0011	.....	
40,000	.0012	0.	
45,000	.0014	.....	
50,000	.0017	0.	
55,000	.0019	.....	
60,000	.0020	.0001	Elastic limit.
61,000	.0119	.....	
62,000	.0138	.....	
63,000	.0149	.....	
64,000	.0159	.....	
65,000	.0179	.0152	
66,000	.0194	.....	
68,000	.0218	.....	
70,000	.0250	.0219	
72,000	.0270	.....	
74,000	.0313	.....	
76,000	.0359	.....	
78,000	.0395	.....	
80,000	.0456	.0419	Tensile strength.
92,210	.....	.....	

Elongation of inch section: ".31.

Exterior diameter at fracture, ".82.

Appearance of fracture, silky.

No. 7592.

Bethlehem Steel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 285, 7×7 HS.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 589.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.		
10,000	.0001		
20,000	.0005		
30,000	.0009		
35,000	.0011		
40,000	.0012	0.	
45,000	.0013		
50,000	.0015	0.	
55,000	.0017		
60,000	.0019	0.	
63,000	.0021		Elastic limit.
64,000	.0024		
65,000	.0042		
66,000	.0058		
68,000	.0071		
70,000	.0086	.0068	
72,000	.0099		
74,000	.0111		
76,000	.0132		
78,000	.0143		
80,000	.0162	.0129	
116,510			Tensile strength.

Elongation of inch section: ".29.

Exterior diameter at fracture, ".84.

Appearance of fracture, silky.

322 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7593.

Bethlehem Steel. Oil hardened and annealed.

Specimen from the middle of length of shaft.

Marks, 285, 7 × 7 HS.

Diameters { exterior, 1".  
interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 589.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
1,000	0.	0.		
5,000	0.	0.		
10,000	.0001	.....		
20,000	.0005	.....		
30,000	.0009	.....		
35,000	.0011	.....		
40,000	.0012	0.		
45,000	.0013	.....		
50,000	.0016	0.		
55,000	.0019	.....		
60,000	.0027	.0007		Elastic limit about 58,000 pounds.
61,000	.0031	.....		
62,000	.0033	.....		
63,000	.0039	.....		
64,000	.0046	.....		
66,000	.0058	.....		
68,000	.0072	.....		
70,000	.0086	.0059		
72,000	.0096	.....		
74,000	.0110	.....		
76,000	.0129	.....		
78,000	.0140	.....		
80,000	.0159	.0128	Tensile strength.	
115,440	.....	.....		

Elongation of inch section: ".29.

Exterior diameter at fracture, ".84.

Appearance of fracture, silky.

No. 7594.

Bethlehem Steel. Annealed.

Specimen from end of shaft.

Marks, 286, 7 × 6 S.

Diameters, } exterior, 1"  
 } interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 587.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.		
10,000	.0001		
20,000	.0006		
30,000	.0009		
35,000	.0011		
40,000	.0012	0.	Elastic limit.
41,000	.0012		
42,000	.0020		
43,000	.0090		
44,000	.0088		
45,000	.0098		
46,000	.0106		
47,000	.0114		
48,000	.0125		
49,000	.0136		
50,000	.0147	.0126	
55,000	.0219		
60,000	.0268	.0242	
65,000	.0352		
70,000	.0480	.0448	Tensile strength.
83,890			

Elongation of inch section: ".36.

Exterior diameter at fracture, ".81.

Appearance of fracture, silky.

No. 7595.

Bethlehem Steel. Annealed.  
 Specimen from middle of length of shaft.  
 Marks, 286, 7 × 6 S.  
 Diameters } exterior, 1".  
               } interior, ".90.  
 Sectional area, .149 square inch.  
 Gauged length, 1".  
 For endurance test see Report of 1895, page 587.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	0.	.....		
10,000	.0001	.....		
20,000	.0004	.....		
30,000	.0009	.....		
35,000	.0010	.....		
40,000	.0011	0.		
41,000	.0012	.....		Elastic limit.
42,000	.0017	.....		
43,000	.0019	.....		
44,000	.0021	.....		
45,000	.0026	.....		
46,000	.0032	.....		
47,000	.0038	.....		
48,000	.0042	.....		
49,000	.0053	.....		
50,000	.0060	.0041		
55,000	.0110	.....	Tensile strength.	
60,000	.0154	.0130		
65,000	.0215	.....		
70,000	.0297	.0263		
87,920	.....	.....		

Elongation of inch section: ".36.  
 Exterior diameter at fracture, ".81.  
 Appearance of fracture, silky.



326 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7597.

Bethlehem Steel. Annealed.

Specimen from middle of length of shaft.

Marks, 288, 7×5 S.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 586.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.	.....	
10,000	.0002	.....	
20,000	.0006	.....	
30,000	.0009	.....	
35,000	.0011	.....	
40,000	.0023	.0011	Elastic limit about 39,000 lbs.
41,000	.0030	.....	
42,000	.0038	.....	
43,000	.0041	.....	
44,000	.0051	.....	
45,000	.0058	.0039	
46,000	.0067	.....	
47,000	.0076	.....	
48,000	.0082	.....	
49,000	.0082	.....	
50,000	.0103	.0082	
55,000	.0163	.....	
60,000	.0229	.....	
65,000	.0351	.....	
70,000	.0528	.....	
77,580	.....	.....	Tensile strength.

Elongation of inch section: ".39.

Exterior diameter at fracture, ".79.

Appearance of fracture, silky.



No. 7554.

Bethlehem Steel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 289, 7x5 HS.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 586.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	0.	.....		
10,000	.0001	.....		
20,000	.0004	.....		
30,000	.0008	.....		
35,000	.0010	.....		
40,000	.0012	0.		
41,000	.0014	.....		Elastic limit.
42,000	.0022	.....		
43,000	.0036	.....		
44,000	.0056	.....		
45,000	.0062	.....		
46,000	.0073	.....		
47,000	.0082	.....		
48,000	.0091	.....		
49,000	.0107	.....		
50,000	.0117	.0099		
55,000	.0182	.....	Tensile strength.	
60,000	.0270	.0248		
65,000	.0372	.....		
70,000	.0540	.....		
76,850	.....	.....		

Elongation of inch section: ".25.

Exterior diameter at fracture, ".85.

Appearance of fracture, silky.

No. 7555.

Bethlehem Steel. Oil hardened and annealed.

Specimen from middle of length of shaft.

Marks, 289, 7x5 HS.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 586.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.	.....	
10,000	.0001	.....	
20,000	.0004	.....	
30,000	.0008	.....	
35,000	.0010	.....	
40,000	.0011	0.	Elastic limit.
42,000	.0012	.....	
43,000	.0015	.....	
44,000	.0018	.....	
45,000	.0029	.....	
46,000	.0036	.....	
47,000	.0049	.....	
48,000	.0060	.....	
49,000	.0070	.....	
50,000	.0080	.0060	
55,000	.0147	.....	
60,000	.0229	.0208	
65,000	.0329	.....	
70,000	.0500	.....	
78,060	.....	.....	Tensile strength.

Elongation of inch section: ".27.

Exterior diameter at fracture, ".87.

Appearance of fracture, silky. There were numerous small cracks opened in the exterior surface ".01 to ".03 long in a circumferential direction, and ".01± deep. Oblique fracture passing through three of these cracks.

No. 7556.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 291, 7x3 HS.

Diameters, } exterior, 1".  
 } interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 583.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	0.	.....	
10,000	.0002	.....	
20,000	.0006	.....	
30,000	.0009	.....	
35,000	.0010	.....	
40,000	.0012	0.	
45,000	.0014	.....	
50,000	.0015	.....	
55,000	.0017	.....	
60,000	.0019	0.	Elastic limit.
70,000	.0021	0.	
80,000	.0024	0.	
90,000	.0027	0.	
100,000	.0030	0.	
107,000	.....	.....	
108,000	.0032	.....	
109,000	.0040	.....	
110,000	.0048	.....	
111,000	.0064	.....	
112,000	.0110	.....	Tensile strength.
129,060	.....	.....	

Elongation of inch section: ".25.

Exterior diameter at fracture, ".85.

Appearance, silky.

330 TENSILE SPECIMENS FROM RUPTURED ENDURANCE SHAFTS.

No. 7557.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from middle of length of shaft.

Marks, 291, 7 × 3 HS.

Diameters } exterior, 1".  
 } interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 583.

Applied loads per square inch.	In gauged length.		Remarks.	
	Elongation.	Set.		
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
1,000	0.	0.	Initial load.	
5,000	0.	.....		
10,000	.0001	.....		
20,000	.0005	.....		
30,000	.0008	.....		
40,000	.0011	0.		
50,000	.0013	.....		
60,000	.0017	0.		
70,000	.0020	.....		
80,000	.0023	0.		
90,000	.0027	.....		
100,000	.0030	0.		
108,000	.0032	.....		Elastic limit.
109,000	.0038	.....		
110,000	.0057	.....		
111,000	.0130	.....		
112,000	.0166	.....		
128,190	.....	.....	Tensile strength.	

Elongation of inch section: ".22.

Exterior diameter at fracture, ".89.

Appearance of fracture, silky. Small cracks opened in the outside surface of the specimen.

No. 7598.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 293, 7×2 HS.

Diameters, { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 581.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	0.	.....	
10,000	.0002	.....	
20,000	.0007	.....	
30,000	.0010	.....	
35,000	.0011	.....	
40,000	.0012	0.	
45,000	.0014	.....	
50,000	.0017	.....	
55,000	.0018	.....	
60,000	.0020	0.	
65,000	.0021	.....	
70,000	.0022	.....	
75,000	.0023	.....	
80,000	.0024	0.	
85,000	.0026	.....	
90,000	.0028	.....	
95,000	.0052	.....	Elastic limit, about 92,000 pounds.
100,000	.0248	.0204	Tensile strength.
105,000	.0343	.....	
110,000	.0520	.....	
116,510	.....	.....	

Elongation of inch section: ".24.  
Exterior diameter at fracture, ".85.  
Appearance of fracture, silky.

No. 7599.

Bethlehem Steel, Nickel. Oil hardened and annealed.

Specimen from middle of length of shaft.

Marks, 293, 7 × 2 HS.

Diameters { exterior, 1".  
                  { interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 581.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,000	0.	0.	
5,000	0.	.....	
10,000	.0002	.....	
20,000	.0006	.....	
30,000	.0009	.....	
35,000	.0010	.....	
40,000	.0011	0.	
45,000	.0013	.....	
50,000	.0016	.....	
55,000	.0018	.....	
60,000	.0019	0.	Elastic limit.
65,000	.0021	.....	
70,000	.0022	.....	
75,000	.0023	.....	
80,000	.0025	0.	
85,000	.0027	.....	
90,000	.0030	.0001	
91,000	.0056	.....	
92,000	.0061	.....	
93,000	.0067	.....	
94,000	.0071	.....	
95,000	.0090	.....	
100,000	.0242	.0203	Tensile strength.
105,000	.0330	.....	
110,000	.0560	.....	
116,110	.....	.....	

Elongation of inch section: ".25.

Exterior diameter at fracture, ".86.

Appearance of fracture, silky. A few minute circumferential cracks on the exterior surface opened near the place of rupture.

No. 7558.

Bethlehem Steel. Oil hardened and annealed.

Specimen from end of shaft.

Marks, 295, 7x8 HS.

Diameters, { exterior, 1".  
interior, ".90.

Sectional area, .149 square inch.

Gauged length, 1".

For endurance test see Report of 1895, page 591.

Applied loads per square inch.	In gauged length.		Remarks.
	Elongation.	Set.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
1,000	0.	0.	Initial load.
5,000	.0001	.....	
10,000	.0002	.....	
20,000	.0007	.....	
30,000	.0010	.....	
40,000	.0012	0.	
50,000	.0017	.....	
60,000	.0019	.....	
70,000	.0021	0.	
80,000	.0025	.....	
85,000	.0027	0.	
90,000	.0029	.0001	Elastic limit.
94,000	.0032	.....	
95,000	.0037	.....	
96,000	.0040	.....	
97,000	.0042	.....	
98,000	.0046	.....	
99,000	.0048	.....	
100,000	.0051	.0016	
101,000	.0054	.....	
102,000	.0058	.....	
103,000	.0060	.....	
104,000	.0062	.....	
105,000	.0067	.....	
106,000	.0070	.....	
107,000	.0072	.....	
108,000	.0078	.....	
109,000	.0082	.....	
110,000	.0085	.....	
111,000	.0090	.....	
112,000	.0093	.0049	Tensile strength.
168,120	.....	.....	

Elongation of inch section: ".17.

Exterior diameter at fracture, ".90.

Appearance of fracture, fine granular, in part silky.





**TABULATION OF ANNULAR TENSION SPECIMENS FROM BARS RUPTURED BY ENDURANCE TESTS OF ROTATING SHAFTS.**  
 Specimens from the middle of the length of the shafts represent metal which had been repeatedly loaded with the maximum fibre stress of the endurance test.  
 Gauged length, 1".

Ten- sion test num- ber.	Endur- ance test num- ber.	Description.	Car- bon.	Location in shaft.	Sec- tional area.	Elastic limit per square inch.	Tensile strength per square inch.	Elonga- tion in 1 inch.	Appearance of fracture.
7588	280	Annealed.	Per ct. .26	End	Sq. in. .149	Pounds. 86,440	86,440	36	Silky.
7589	280	do	.26	Middle	.149	88,220	88,220	38	Do.
7590	281	Oil hardened and annealed.	.26	End	.149	60,000	94,770	33	Do.
7591	281	do	.26	Middle	.149	60,000	92,210	31	Do.
7592	285	do	.46	End	.149	68,000	116,510	29	Do.
7593	285	do	.46	Middle	.149	68,000	118,440	29	Do.
7594	286	Annealed.	.42	End	.149	41,000	88,800	36	Do.
7595	286	do	.42	Middle	.149	41,000	87,920	36	Do.
7596	288	do	.24	End	.149	68,000	74,090	43	Do.
7597	288	do	.24	Middle	.149	68,000	77,880	39	Do.
7554	289	Oil hardened and annealed.	.24	End	.149	41,000	76,850	25	Do.
7555	289	do	.24	Middle	.149	42,000	76,060	27	Silky. Numerous small cracks in exterior sur- face. Oblique fracture.
7556	291	do	.20	End	.149	107,000	129,060	25	Silky. Small cracks in outside surface.
7557	291	do	.20	Middle	.149	108,000	128,190	22	Silky. Small cracks in outside surface.
7598	293	do	.25	End	.149	92,000	116,510	24	Silky. Minute circumferential cracks on ex- terior surface.
7599	293	do	.25	Middle	.149	90,000	116,110	25	Silky. Minute circumferential cracks on ex- terior surface.
7568	295	do	.66	End	.149	94,000	168,120	17	Fine granular, in part silky.
7569	295	do	.66	Middle	.149	95,000	122,150	2	Granular, irregular coarse. Numerous fine cracks.

a Approximate.



---

---

# BRICKS.

---

## ABSORPTION OF WATER AND ELASTIC PROPERTIES.

---

DRY PRESSED AND MUD BRICKS FROM DIFFERENT  
PARTS OF A DOWN-DRAFT KILN.

The two kinds of bricks, made from the same clay, were burned side by side in  
the respective parts of the kiln mentioned.

---

MATERIAL FURNISHED BY MESSRS. FISKE & CO., BOSTON, MASS.



---

---


## ABSORPTION TESTS OF BRICKS.

---

DRY PRESSED AND MUD BRICKS, FROM DIFFERENT PARTS OF THE  
SAME KILN, IMMERSSED IN WATER DIFFERENT INTERVALS OF  
TIME AND THE TOTAL AND SUCCESSIVE AMOUNTS  
OF WATER ABSORBED DETERMINED.

---

---



## DRY PRESSED BRICK, TOP OF KILN.

Dimensions: 8".18×4".03×2".42.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	40,950	.....	.....	.....
.....	.....	2	41,970	1,020	2.5	1,020
.....	.....	4	42,550	1,610	3.9	590
.....	.....	6	43,040	2,090	5.1	480
.....	.....	8	43,430	2,480	6.1	390
.....	.....	10	43,720	2,770	6.8	290
.....	.....	12	43,980	2,980	7.3	210
.....	.....	14	44,060	3,100	7.6	120
.....	.....	20	44,100	3,150	7.7	50
.....	1	.....	44,140	3,190	7.8	40
.....	10	.....	44,220	3,270	8.0	80
2	.....	.....	44,320	3,370	8.2	100
19	.....	.....	44,450	3,510	8.6	140
27	.....	.....	44,500	3,550	8.7	40
67	.....	.....	44,560	3,610	8.8	60
95	.....	.....	44,570	3,620	8.8	10
120	.....	.....	44,630	3,680	9.0	60
144	.....	.....	44,680	3,730	9.1	50
168	.....	.....	44,710	3,760	9.2	30

## DRY PRESSED BRICK, ONE-THIRD DOWN.

Dimensions: 8".30×3".92×2".47.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	39,830	.....	.....	.....
.....	.....	2	40,965	1,155	2.9	1,155
.....	.....	4	41,710	1,880	4.7	725
.....	.....	6	42,225	2,395	6.0	515
.....	.....	8	42,640	2,810	7.1	415
.....	.....	10	42,980	3,150	7.9	340
.....	.....	12	43,200	3,370	8.5	220
.....	.....	14	43,340	3,510	8.8	140
.....	.....	20	43,440	3,610	9.1	100
.....	1	.....	43,580	3,750	9.4	140
.....	10	.....	43,670	3,840	9.6	90
2	.....	.....	43,820	3,990	10.0	150
4	.....	.....	43,810	3,980	10.0	-10
20	.....	.....	43,930	4,100	10.3	110
28	.....	.....	43,960	4,150	10.4	50
68	.....	.....	44,050	4,220	10.6	70
96	.....	.....	44,070	4,240	10.6	20
120	.....	.....	44,110	4,280	10.7	40
144	.....	.....	44,160	4,330	10.9	50
168	.....	.....	44,210	4,380	11.0	50

**DRY PRESSED BRICK, TWO-THIRDS DOWN.**

Dimensions: 8".42 × 4" × 2".50.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	41,800	.....	.....	.....
.....	.....	2	43,105	1,305	3.1	1,305
.....	.....	4	43,870	2,070	5.0	765
.....	.....	6	44,435	2,635	6.4	625
.....	.....	8	44,970	3,170	7.6	475
.....	.....	10	45,380	3,580	8.5	390
.....	.....	12	45,655	3,855	9.2	295
.....	.....	14	45,840	4,040	9.7	185
.....	.....	16	45,905	4,105	9.8	65
.....	.....	18	45,915	4,115	9.8	10
.....	.....	20	45,915	4,115	9.8	0
.....	10	.....	45,950	4,150	9.9	35
1	.....	.....	45,980	4,180	10.0	30
8	.....	.....	46,080	4,280	10.2	100
23	.....	.....	46,170	4,370	10.5	90
71	.....	.....	46,230	4,430	10.7	120
96	.....	.....	46,310	4,510	10.8	20
120	.....	.....	46,340	4,540	10.8	30
144	.....	.....	46,380	4,580	11.0	40
168	.....	.....	46,450	4,650	11.1	70

**DRY PRESSED BRICK FROM BOTTOM OF KILN.**

Dimensions: 8".50 × 4".05 × 2".53.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	40,500	.....	.....	.....
.....	.....	2	41,935	1,435	3.5	1,435
.....	.....	4	42,880	2,380	5.9	945
.....	.....	6	43,710	3,210	7.9	830
.....	.....	8	44,390	3,890	9.6	680
.....	.....	10	44,950	4,450	11.0	560
.....	.....	12	45,450	4,950	12.2	500
.....	.....	14	45,780	5,280	13.0	330
.....	.....	16	46,005	5,505	13.6	225
.....	.....	18	46,110	5,610	13.8	105
.....	.....	20	46,110	5,610	13.8	0
.....	.....	30	46,115	5,615	13.9	5
.....	1	.....	46,130	5,630	13.9	15
.....	5	.....	46,130	5,630	13.9	0
.....	30	.....	46,130	5,630	13.9	0
3	.....	.....	46,150	5,650	14.0	20
15	.....	.....	46,215	5,715	14.1	65
26	.....	.....	46,260	5,760	14.2	45
42	.....	.....	46,370	5,870	14.5	110
66	.....	.....	46,440	5,940	14.7	70
114	.....	.....	46,520	6,020	14.9	80
120	.....	.....	46,530	6,030	14.9	10
144	.....	.....	46,530	6,030	14.9	0
168	.....	.....	46,580	6,080	15.0	50



## MUD BRICK, TOP OF KILN.

Dimensions: 8".05 × 3".95 × 2".40.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	43,990	.....	.....	.....
.....	.....	4	44,080	40	0.1	40
.....	.....	12	44,080	40	0.1	0
.....	.....	1	44,080	40	0.1	0
.....	.....	5	44,040	50	0.1	10
.....	.....	80	44,050	60	0.1	10
2	.....	.....	44,060	70	0.2	10
4	.....	.....	44,090	100	0.2	30
5	.....	.....	44,090	100	0.2	0
45	.....	.....	44,280	240	0.5	140
72	.....	.....	44,320	330	0.8	90
96	.....	.....	44,400	410	0.9	80
120	.....	.....	44,480	490	1.1	80
144	.....	.....	44,570	580	1.3	90
168	.....	.....	44,660	670	1.5	90

## MUD BRICK, ONE-FOURTH DOWN.

Dimensions: 8".10 × 3".98 × 2".38.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	42,290	.....	.....	.....
.....	.....	2	42,450	160	0.4	160
.....	.....	4	42,490	200	0.5	40
.....	.....	8	42,530	240	0.6	40
.....	.....	12	42,560	260	0.6	20
.....	.....	20	42,570	280	0.7	20
.....	.....	1	42,600	310	0.7	30
.....	.....	5	42,660	370	0.9	60
.....	.....	10	42,730	440	1.0	70
.....	.....	30	42,850	560	1.3	120
1	.....	.....	43,020	730	1.7	170
3	.....	.....	43,490	1,200	2.8	470
4	.....	.....	43,670	1,880	3.3	180
5	.....	.....	43,820	1,530	3.6	150
6	.....	.....	43,920	1,630	3.9	100
45	.....	.....	44,280	1,990	4.7	360
72	.....	.....	44,360	2,070	4.9	80
96	.....	.....	44,410	2,120	5.0	50
120	.....	.....	44,460	2,170	5.1	50
144	.....	.....	44,490	2,200	5.2	30
168	.....	.....	44,580	2,240	5.3	40

MUD BRICK, TWO-THIRDS DOWN.

Dimensions: 8".42 × 4".08 × 2".52.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	45,020	.....	.....	.....
.....	.....	2	45,280	260	0.6	260
.....	.....	4	45,420	400	0.9	140
.....	.....	6	45,560	540	1.2	140
.....	.....	8	45,680	660	1.5	120
.....	.....	10	45,780	760	1.7	100
.....	.....	12	45,870	850	1.9	90
.....	.....	14	45,960	940	2.1	90
.....	.....	20	46,060	1,030	2.3	90
.....	.....	30	46,150	1,130	2.5	100
.....	1	.....	46,270	1,250	2.8	120
.....	2	.....	46,440	1,420	3.2	170
.....	3	.....	46,580	1,560	3.5	140
.....	4	.....	46,700	1,680	3.7	120
.....	5	.....	46,810	1,790	4.0	110
.....	7	.....	46,940	1,920	4.3	130
.....	10	.....	47,110	2,090	4.6	170
.....	15	.....	47,290	2,270	5.0	180
.....	20	.....	47,450	2,430	5.4	160
.....	25	.....	47,600	2,580	5.7	150
.....	30	.....	47,690	2,670	5.9	90
.....	45	.....	47,840	2,820	6.2	150
1	.....	.....	47,890	2,870	6.4	50
2	.....	.....	47,910	2,890	6.4	20
4	.....	.....	47,980	2,960	6.6	70
7	.....	.....	48,040	3,020	6.7	60
47	.....	.....	48,300	3,280	7.3	260
72	.....	.....	48,380	3,360	7.5	80
96	.....	.....	48,430	3,410	7.6	50
120	.....	.....	48,530	3,510	7.8	100
144	.....	.....	48,610	3,590	8.0	80
168	.....	.....	48,630	3,610	8.0	20

MUD BRICK, BOTTOM OF KILN.

Dimensions: 8".53 × 4".16 × 2".50.

Time in water.			Weight.	Gain.	Gain by weight.	Successive gain.
Hours.	Mins.	Secs.	Grains.	Grains.	Per cent.	Grains.
.....	.....	0	44,700	.....	.....	.....
.....	.....	2	45,120	420	0.9	420
.....	.....	4	45,440	740	1.7	320
.....	.....	6	45,670	970	2.2	230
.....	.....	8	45,880	1,180	2.6	210
.....	.....	10	46,060	1,360	3.0	180
.....	.....	12	46,220	1,520	3.4	160
.....	.....	14	46,400	1,700	3.8	180
.....	.....	20	46,600	1,900	4.3	200
.....	1	.....	46,890	2,190	4.9	290
.....	2	.....	47,370	2,670	6.0	480
.....	4	.....	47,710	3,010	6.7	340
.....	6	.....	47,940	3,240	7.2	230
.....	8	.....	48,160	3,460	7.7	220
.....	10	.....	48,320	3,620	8.1	160
.....	25	.....	48,540	3,840	8.6	220
1	.....	.....	48,600	3,900	8.7	60
2	.....	.....	48,630	3,930	8.8	30
17	.....	.....	48,910	4,210	9.4	280
25	.....	.....	49,050	4,350	9.7	140
64	.....	.....	49,150	4,450	10.0	100
88	.....	.....	49,210	4,510	10.1	60
96	.....	.....	49,250	4,550	10.2	40
120	.....	.....	49,310	4,610	10.3	60
144	.....	.....	49,400	4,700	10.5	90
168	.....	.....	49,430	4,730	10.6	30

## ELASTIC PROPERTIES OF BRICKS.

Ends of bricks were ground flat on a rubbing bed.



No. 1458.

DRY PRESSED BRICK.

Shade 11, from top of kiln.

Total weight, 5 pounds 14½ ounces=128.3 pounds per cubic foot.

Length, 8".13.

Sectional area, 2".43 × 4".00=9.72 square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
972	100	0.	0.		
1,944	200	.0008	0.		
3,888	400	.0007	0.		
5,832	600	.0012	0.		
7,776	800	.0015	0.		
9,720	1,000	.0017	0.		
11,664	1,200	.0020	.....		
13,608	1,400	.0024	.....		
15,552	1,600	.0028	.....		
17,496	1,800	.0030	.....		
19,440	2,000	.0033	0.		
21,384	2,200	.0036	.....		
23,328	2,400	.0039	.....		
25,272	2,600	.0042	.....		
27,216	2,800	.0045	.....		
29,160	3,000	.0049	0.		E (1,000-3,000)=3,125,000 pounds per square inch.
31,104	3,200	.0051	.....		E (1,000-8,000)=3,271,000 pounds per square inch. Ultimate strength.
33,048	3,400	.0054	.....		
34,992	3,600	.0057	.....		
36,936	3,800	.0060	.....		
38,880	4,000	.0063	0.		
40,824	4,200	.0066	.....		
42,768	4,400	.0069	.....		
44,712	4,600	.0072	.....		
46,556	4,800	.0075	.....		
48,500	5,000	.0078	.0001		
50,544	5,200	.0081	.....		
52,488	5,400	.0084	.....		
54,432	5,600	.0087	.....		
56,376	5,800	.0090	.....		
58,320	6,000	.0093	.0001		
60,264	6,200	.0097	.....		
62,208	6,400	.0100	.....		
64,152	6,600	.0104	.....		
66,096	6,800	.0107	.....		
68,040	7,000	.0110	.0002		
69,984	7,200	.0113	.....		
71,928	7,400	.0117	.....		
73,872	7,600	.0120	.....		
75,816	7,800	.0124	.....		
77,760	8,000	.0127	.0003		
100,100	10,300	.....	.....		

No. 1459.

## DRY PRESSED BRICK.

Shade 7, from  $\frac{1}{2}$  down the kiln.Total weight, 5 pounds 15 $\frac{1}{2}$  ounces = 127.2 pounds per cubic foot.

Length, 8".23.

Sectional area, 2".46  $\times$  3".98 = 9.79 square inches.

Gauged length, 5".

Applied loads.		In gauged lengths.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
Pounds.	Pounds.	Inch.	Inch.		
979	100	0.	0.	Initial load.	
1,958	200	.0002			
3,916	400	.0004			
5,874	600	.0007			
7,832	800	.0010			
9,790	1,000	.0012	.0001		
11,748	1,200	.0015			
13,706	1,400	.0018			
15,664	1,600	.0021			
17,622	1,800	.0025			
19,580	2,000	.0029	.0001		
21,538	2,200	.0032			
23,496	2,400	.0035			
25,454	2,600	.0039			
27,412	2,800	.0042			
29,370	3,000	.0045	.0002		E (1,000-3,000) = 3,125,000 pounds per square inch.
31,328	3,200	.0048			E (1,000-8,000) = 2,846,000 pounds per square inch. Ultimate strength.
33,286	3,400	.0052			
35,244	3,600	.0055			
37,202	3,800	.0058			
39,160	4,000	.0061	.0002		
41,118	4,200	.0065			
43,076	4,400	.0069			
45,034	4,600	.0073			
46,992	4,800	.0076			
48,950	5,000	.0080	.0002		
50,908	5,200	.0083			
52,866	5,400	.0086			
54,824	5,600	.0091			
56,782	5,800	.0094			
58,740	6,000	.0097	.0004		
60,698	6,200	.0101			
62,656	6,400	.0106			
64,614	6,600	.0109			
66,572	6,800	.0113			
68,530	7,000	.0116	.0006		
70,488	7,200	.0121			
72,446	7,400	.0125			
74,404	7,600	.0129			
76,362	7,800	.0134			
78,320	8,000	.0140	.0006		
85,600	8,740				

No. 1460.

## DRY PRESSED BRICK.

Shade 2, from  $\frac{3}{4}$  down the kiln.Total weight, 5 pounds  $13\frac{1}{4}$  ounces = 124.3 pounds per cubic foot.

Length, 8".24.

Sectional area, 2".48  $\times$  3".95 = 9.8 square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
Pounds.	Pounds.	Inch.	Inch.		
980	100	0.	0.	Initial load.	
1,960	200	.0008	0.		
3,920	400	.0008	0.		
5,880	600	.0012	0.		
7,840	800	.0017	0.		
9,800	1,000	.0022	.0001		
11,760	1,200	.0026	.....		
13,720	1,400	.0031	.....		
15,680	1,600	.0036	.....		
17,640	1,800	.0041	.....		
19,600	2,000	.0046	.0001		
21,560	2,200	.0050	.....		
23,520	2,400	.0055	.....		
25,480	2,600	.0059	.....		
27,440	2,800	.0064	.....		
29,400	3,000	.0068	.0002		E (1,000-3,000) = 2,222,000 pounds per square inch.
31,360	3,200	.0072	.....		
33,320	3,400	.0077	.....		
35,280	3,600	.0082	.....		
37,240	3,800	.0086	.....		
39,200	4,000	.0091	.0004		
41,160	4,200	.0096	.....		
43,120	4,400	.0101	.....		
45,080	4,600	.0107	.....		
47,040	4,800	.0112	.....		
49,000	5,000	.0118	.0005		E (1,000-5,000) = 2,174,000 pounds per square inch.
50,960	5,200	.0124	.....		
52,920	5,400	.0130	.....		
54,880	5,600	.0139	.....		
56,840	5,800	.0145	.....		
58,200	5,940	.....	.....	Ultimate strength.	

## DRY DRESSED BRICK.

Shade 06, from bottom of kiln.

Total weight, 5 pounds 12 ounces = 119.8 pounds per cubic foot.

Length, 8".26.

Sectional area, 2".51 × 4".04 = 10.14 square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1, 014	100	0.	0.	
2, 028	200	.0006	0.	
4, 056	400	.0015	0.	
6, 084	600	.0025	0.	
8, 112	800	.0034	.0001	
10, 140	1, 000	.0041	.0002	
12, 168	1, 200	.0051	.....	
14, 196	1, 400	.0060	.....	
16, 224	1, 600	.0067	.....	
18, 252	1, 800	.0076	.....	
20, 280	2, 000	.0084	.0005	
22, 308	2, 200	.0093	.....	
24, 336	2, 400	.0101	.....	
26, 364	2, 600	.0111	.....	
28, 392	2, 800	.0121	.....	
30, 420	3, 000	.0131	.0009	
				E(1,000-3,000) = 1,205,000 pounds per square inch.
32, 448	3, 200	.0146	.....	
34, 476	3, 400	.0165	.0015	
36, 300	3, 480	.....	.....	Ultimate strength.

No. 1462.

MUD BRICK.

Shade 8, from top of kiln.

Total weight, 6 pounds 1 ounce=144.3 pounds per cubic foot.

Length, 7".89.

Sectional area, 2".36 × 3".90=9.20 square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
920	100	0.	0.	Initial load.
1,840	200	0.	0.	
3,680	400	.0001	0.	
5,520	600	.0002	0.	
7,360	800	.0003	0.	
9,200	1,000	.0004	0.	
11,040	1,200	.0005	.....	
12,880	1,400	.0007	.....	
14,720	1,600	.0008	.....	
16,560	1,800	.0009	.....	
18,400	2,000	.0010	0.	
20,240	2,200	.0011	.....	
22,080	2,400	.0012	.....	
23,920	2,600	.0013	.....	
25,760	2,800	.0014	.....	
27,600	3,000	.0015	.0001	E (1,000-3,000)=10,000,000 pounds per square inch.
29,440	3,200	.0016	.....	
31,280	3,400	.0017	.....	
33,120	3,600	.0018	.....	
34,960	3,800	.0019	.....	
36,800	4,000	.0020	.0001	
38,640	4,200	.0021	.....	
40,480	4,400	.0023	.....	
42,320	4,600	.0024	.....	
44,160	4,800	.0025	.....	
46,000	5,000	.0026	.0001	
49,680	5,400	.0029	.....	
53,360	5,800	.0030	.....	
55,200	6,000	.0031	.0001	
58,880	6,400	.0034	.....	
62,560	6,800	.0036	.....	
64,400	7,000	.0038	.0001	
68,080	7,400	.0040	.....	
71,760	7,800	.0042	.....	
73,600	8,000	.0044	.0001	
77,280	8,400	.0046	.....	
80,960	8,800	.0049	.....	
82,800	9,000	.0051	.0001	
86,480	9,400	.0053	.....	
90,160	9,800	.0056	.....	
92,000	10,000	.0057	.0001	E (1,000-10,000)=8,654,000 pounds per square inch.
176,400	19,170	.....	.....	Ultimate strength.

MUD BRICK.

Shade 5, from  $\frac{1}{4}$  down the kiln.

Total weight, 6 pounds=136.4 pounds per cubic foot.

Length, 8".04.

Sectional area,  $2".35 \times 3".99=9.38$  square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
988	100	0.	0.	
1,876	200	.0001	0.	E (1,000-3,000)=7,692,000 pounds per square inch.
3,752	400	.0003	0.	
5,628	600	.0004	0.	
7,504	800	.0005	0.	
9,380	1,000	.0006	0.	
11,256	1,200	.0007	.....	
13,132	1,400	.0009	.....	
15,008	1,600	.0010	.....	
16,884	1,800	.0011	.....	
18,760	2,000	.0012	0.	
22,512	2,400	.0015	.....	
26,264	2,800	.0017	.....	
28,140	3,000	.0019	0.	
31,892	3,400	.0021	.....	
35,644	3,800	.0024	.....	
37,520	4,000	.0026	0.	
41,272	4,400	.0028	.....	
45,024	4,800	.0031	.....	
46,900	5,000	.0033	.0001	
50,652	5,400	.0035	.....	
54,404	5,800	.0038	.....	
56,280	6,000	.0040	.0001	
60,032	6,400	.0042	.....	
63,784	6,800	.....	.....	
147,000	16,670	.....	.....	
				E (1,000-6,000)=7,576,000 pounds per square inch. Snapping sounds. Spawled at lower edge. Ultimate strength.



No. 1464.

MUD BRICK.

Shade 2, from  $\frac{3}{4}$  down the kiln.Total weight, 6 pounds  $4\frac{1}{4}$  ounces = 130.6 pounds per cubic foot.

Length, 8".30.

Sectional area,  $2''.48 \times 4''.07 = 10.09$  square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
1,009	100	0.	0.	
2,018	200	0.	0.	
4,086	400	.0001	0.	
6,064	600	.0003	0.	
8,072	800	.0006	0.	
10,090	1,000	.0008	0.	
12,108	1,200	.0010	.....	
14,126	1,400	.0012	.....	
16,144	1,600	.0014	.....	
18,182	1,800	.0016	.....	
20,180	2,000	.0019	.0001	
24,216	2,400	.0022	.....	
28,262	2,800	.0027	.....	
30,270	3,000	.0029	.0002	
34,306	3,400	.0034	.....	
38,342	3,800	.0039	.....	
40,380	4,000	.0042	.0002	
44,396	4,400	.0045	.....	
48,432	4,800	.0050	.....	
50,450	5,000	.0052	.0002	
54,486	5,400	.0056	.....	
58,522	5,800	.0061	.....	
60,540	6,000	.0063	.0002	
64,576	6,400	.0068	.....	
68,612	6,800	.0073	.....	
70,630	7,000	.0076	.0002	
106,100	10,420	.....	.....	
				E (1,000-3,000) = 5,268,000 pounds per square inch.
				Snapping sounds.
				Corner spawled off.
				E (1,000-7,000) = 4,545,000 pounds per square inch.
				Ultimate strength.

No. 1465.

MUD BRICK.

Shade 03, from bottom of kiln.

Total weight, 6 pounds  $4\frac{1}{2}$  ounces = 125.4 pounds per cubic foot.Length, 8<sup>7</sup>/<sub>16</sub>.Sectional area:  $2''.51 \times 4''.15 = 10.42$  square inches.

Gauged length, 5".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
1,042	100	0.	0.		
2,084	200	.0001	0.		
4,168	400	.0002	0.		
6,252	600	.0004	0.		
8,336	800	.0007	0.		
10,420	1,000	.0009	0.		
12,504	1,200	.0010	.....		
14,588	1,400	.0012	.....		
16,672	1,600	.0015	.....		
18,756	1,800	.0017	.....		
20,840	2,000	.0019	0.		
25,008	2,400	.0028	.....		
29,176	2,800	.0029	.....		
31,260	3,000	.0031	0.		
35,428	3,400	.0036	.....		
39,596	3,800	.0041	.....		
41,680	4,000	.0044	0.		
45,848	4,400	.0049	.....		
50,016	4,800	.0054	.....		
52,100	5,000	.0057	0.		
56,268	5,400	.0062	.....		
60,436	5,800	.0068	.....		
62,520	6,000	.0070	0.		
66,688	6,400	.0075	.....		
70,856	6,800	.0080	.....		
72,940	7,000	.0084	.0001		
77,108	7,400	.0089	.....		
81,276	7,800	.0094	.....		
85,440	8,000	.0098	.0001		
118,300	10,870	.....	.....		
					E (1,000-3,000) = 4,545,000 pounds per square inch.
					E (1,000-8,000) = 3,977,000 pounds per square inch.
				Ultimate strength.	

TABULATION OF TESTS ON ELASTIC PROPERTIES AND COMPRESSIVE STRENGTH OF DRY-PRESSED AND MUD BRICKS.  
Gauged length, 5".

No. of test.	Kind of brick.	Shade.	Position in kiln.	Weight per cubic foot.	Modulus of elasticity.		Permanent sets after loads per square inch of—			Compressive strength per square inch.	Remarks.
					Between loads per square inch of 1,000 and 3,000.	At highest stress observed.	1,000.	3,000.	5,000.		
1458	Dry pressed	11	Top	Pounds 128.3	Pounds 3,125,000	Pounds 3,271,000	Inch. 0.	Inch. 0.	Inch. 0.	Pounds 10,300	The several bricks were loaded endwise.
1459	do	7	down	127.2	3,125,000	2,544,000	.0001	.0002	.0002	8,740	
1460	do	2	down	124.3	2,222,000	2,174,000	.0001	.0002	.0005	5,540	
1461	do	08	Bottom	119.8	1,205,000		.0002	.0009		3,480	
1462	Mud	8	Top	144.3	10,000,000	8,654,000	0.	.0001	.0001	19,170	
1463	do	5	down	136.4	7,692,000	7,575,000	0.	0.	.0001	15,570	
1464	do	2	down	130.6	5,283,000	4,545,000	0.	.0002	.0002	10,420	
1465	do	08	Bottom	128.4	4,545,000	3,377,000	0.	0.	0.	10,370	



---


---

**SLATE—SLABS, CUBES, AND ROOFING.**

**MATERIAL FURNISHED BY THE MATHEWS CONSOLIDATED SLATE COMPANY,  
BOSTON, MASS.**

---


---



Chemical analyses.

Marka.	Color.	Silica.	Oxide of iron.	Alumina.	Lime.	Oxide of mag- nestum.	Carbon dioxide.
1.....	Purple.....	61.75	7.05	18.81	2.00	3.05	7.34
2.....	Green.....	61.61	6.70	19.56	2.33	3.85	5.95
3.....	Red.....	70.20	4.36	17.65	Trace.	Trace.	3.22
4.....	Red.....	67.00	3.97	24.23	Trace.	2.05	3.43
5.....	Green.....	60.12	8.00	25.74	Trace.	2.75	3.39

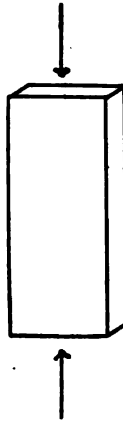
COMPRESSION TESTS OF SLABS.



No. of test.	Marka.	Color.	Dimensions.				Ultimate strength.		Fracture.
			Height.	Compressed surface.		Sectional area.	Total.	Per square inch.	
Inches.	Inches.	Inch.		Sq. ins.	Pounds.				Pounds.
12,011	2 B	Green	30.05	12.00	2.02	24.24	429,000	17,700	Crushed at one end and split longitudinally. Split along a false joint at middle of height.
12,012	2 B	....do..	30.05	11.99	2.02	24.22	168,000	6,940	
12,013	2 B	....do..	30.00	12.00	1.98	23.76	389,000	16,370	Crushed at one end and split longitudinally. Do.
12,014	7 C	Purple.	30.05	12.01	1.98	23.78	255,800	10,760	
12,015	7 C	....do..	30.05	12.00	2.00	24.00	279,000	11,680	Crushed at middle of height.
12,016	7 C	....do..	30.03	12.01	2.01	24.14	340,500	14,110	
12,017	6 B	Red ...	30.05	11.99	1.98	23.14	306,000	13,220	Crushed near end, split longitudinally.
12,018	6 B	....do..	30.05	12.00	1.97	23.64	206,000	8,670	
12,019	6 B	....do..	30.05	12.00	1.96	23.52	265,400	11,280	Crushed at end, split longitudinally. Oblique crack near middle,

Test No. 12020.

## COMPRESSION TESTS OF CUBES.

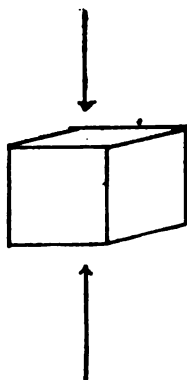

Marks.	Color.	How tested.	Dimensions.			Sectional area.	Ultimate strength.	
			Height.	Compressed surface.			Total.	Per square inch.
			Inches.	Inches.	Inches.	Sq. ins.	Pounds.	Pounds.
1A	Purple	On bed	3.99	4.00	4.00	16.00	421,000	26,310
1A	do	do	3.96	4.00	3.95	15.80	440,000	27,850
1A	do	do	4.00	3.97	4.00	15.88	453,000	28,530
1A	do	On edge	3.99	3.96	3.99	15.80	494,000	31,270
1A	do	do	4.00	3.99	3.99	15.92	604,000	31,660
1A	do	do	3.98	3.96	4.00	15.80	432,000	27,970
2A	Green	On bed	4.10	4.00	4.01	16.04	395,800	24,680
2A	do	do	4.09	4.01	4.00	16.04	353,000	22,010
2A	do	do	4.07	4.00	4.00	16.00	374,600	23,410
2A	do	On edge	3.97	4.00	4.07	16.28	409,000	25,120
2A	do	do	3.99	4.00	4.06	16.24	400,500	24,690
2A <sup>a</sup>	do	do	3.98	4.00	4.05	16.20	327,000	20,190
3A	Red	On bed	4.05	3.80	3.99	15.16	421,500	27,800
3A	do	do	4.03	3.96	3.97	15.72	455,000	28,940
3A	do	do	4.09	4.02	4.01	16.12	474,000	29,400
3A	do	On edge	4.15	4.03	4.00	16.12	255,000	15,820
3A	do	do	4.01	4.03	4.07	16.40	269,900	16,460
3A	do	do	4.12	4.01	4.00	16.04	259,500	16,180
5A	Green	On bed	4.00	4.00	4.00	16.00	319,000	19,940
5A	do	do	3.99	4.00	4.00	16.00	343,800	21,490
5A	do	do	3.99	4.00	4.00	16.00	320,500	20,030
5A	do	On edge	4.00	4.02	3.99	16.04	227,500	14,180
5A	do	do	4.00	4.00	4.00	16.00	299,600	18,730
5A	do	do	4.00	4.00	4.03	16.12	270,000	16,750
6A	Red	On bed	4.00	4.00	4.01	16.04	439,500	27,400
6A	do	do	3.98	4.00	4.00	16.00	392,800	23,930
6A	do	do	3.97	4.00	4.01	16.04	421,000	26,250
6A	do	On edge	4.00	4.02	3.97	15.96	334,000	20,930
6A	do	do	4.01	4.02	3.98	16.00	349,500	21,840
6A	do	do	4.00	4.01	3.95	15.84	369,000	23,300

<sup>a</sup> Compressed surface not flat.





FRAGMENTED CURBS OF SLATE AFTER COMPRESSION TESTS, SHOWING THE MANNER OF FAILURE WHEN LOADED ON EDGE AND ON FEEB, RESPECTIVELY. ARROWS SHOW THE DIRECTION OF LOADING.



Test No. 12021.

TRANSVERSE TESTS OF ROOFING SLATES.


Slates supported at ends, 16 inches apart, and loaded at the middle. Slates were about 20 inches long each.

Marks.	Color.	Dimensions.		Maximum deflection.	Ultimate strength.		Fracture.	
		Breadth.	Depth.		Total.	Modulus of rupture per square inch.		
		<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Pounds.</i>	<i>Pounds.</i>		
1	Purple.....	9.90	.29	.11	337	9,430	Oblique.	
1	.....do.....	9.95	.23	.14	302	9,210		
1	.....do.....	9.95	.23	.11	168	7,570		
2	Green.....	9.80	.30	.11	313	8,520		
2	.....do.....	9.90	.26	.11	279	10,010		
2	.....do.....	9.97	.24	.12	204	8,520		
3	Red.....	9.95	.26	.12	215	7,670		(a)
3	.....do.....	10.15	.26	.09	302	7,060		
3	.....do.....	10.00	.28	.10	308	9,430		
4	.....do.....	9.95	.29	.08	296	8,490		
4	.....do.....	9.95	.24	.14	223	9,840		
4	.....do.....	10.00	.28	.10	260	7,960		
5	Green.....	9.95	.26	.11	278	9,920		
5	.....do.....	10.00	.27	.10	221	7,280		
5	.....do.....	9.95	.27	.10	225	7,440		

<sup>a</sup> Contained a false joint 3 inches eccentric, fracture not affected thereby. Broke at the center of the span.

TEST No. 12,022.

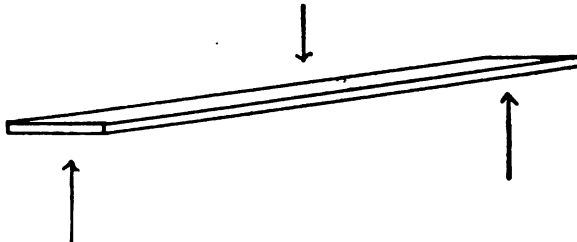TRANSVERSE TESTS OF TREADS.



Supported at the ends 54 inches apart. Loaded at the middle.

Marks.	Color.	Dimensions.		Maximum deflection.	Ultimate strength.		Fracture.
		Breadth.	Depth.		Total.	Modulus of rupture per square inch.	
		<i>Inches.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
2 C	Green.....	12.00	1.00	.244	1,100	7,425	
2 C	.....do.....	12.00	.99	.266	1,630	11,280	
2 C	.....do.....	12.00	1.05	.296	1,650	10,100	
6 D	Red.....	12.00	1.04	.188	1,080	6,430	
6 D	.....do.....	12.01	1.05	.232	1,354	8,190	
6 D	.....do.....	12.00	1.08	.262	1,435	9,140	
7 D	Purple.....	12.00	1.05	.235	1,556	9,530	
7 D	.....do.....	12.01	1.05	.205	1,050	6,300	

## DETAILS OF TRANSVERSE TESTS.

## GREEN TREAD, 2C, FIRST SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	Initial load.
50	.....	0.	
100	.....	.012	
150	.....	.024	
200	.....	.036	
250	.....	.048	
50	.....	0.	
300	.....	.060	
350	.....	.072	
400	.....	.084	
450	.....	.097	
50	.....	0.	
500	.....	.109	
550	.....	.120	
600	.....	.132	
650	.....	.146	
50	.....	0.	
700	.....	.159	
750	.....	.170	
800	.....	.182	
850	.....	.194	
50	.....	0.	
900	.....	.207	
950	.....	.218	
1,000	.....	.230	
1,050	.....	.244	
50	.....	.....	Ultimate strength.
1,100	7,425	.....	

## GREEN TREAD, 2C, SECOND SAMPLE.

Applied loads.		Deflec- tions.	Remarks.	
Total.	Modulus of rupture per square inch.			
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	Initial load.	
50	.....	0.		
250	.....	.056		
50	.....	0.		
450	.....	.111		
50	.....	0.		
650	.....	.162		
50	.....	0.		
850	.....	.214		
50	.....	0.		
1,050	.....	.263		
50	.....	0.		
1,250	.....	.310		
1,450	.....	.365		
1,650	11,230	.....		Ultimate strength.

## DETAILS OF TRANSVERSE TESTS—Continued.

## GREEN TREAD, 2C, THIRD SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	Initial load.
50	.....	0.	
250	.....	.049	
50	.....	0.	
450	.....	.090	
50	.....	0.	
650	.....	.131	
50	.....	0.	
850	.....	.171	
50	.....	0.	
1,050	.....	.214	
50	.....	.....	
1,250	.....	.255	
50	.....	.....	
1,450	.....	.296	
50	.....	.....	
1,650	10,100	.....	Ultimate strength. Sustained the maximum load 4 minutes, then fractured.

## RED TREAD, 6D, FIRST SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	Initial load.
50	.....	0.	
250	.....	.042	
50	.....	0.	
450	.....	.084	
50	.....	0.	
650	.....	.125	
50	.....	0.	
850	.....	.168	
50	.....	0.	
1,080	6,430	.....	Ultimate strength.

## RED TREAD, 6D, SECOND SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	Initial load.
50	.....	0.	
250	.....	.040	
50	.....	0.	
450	.....	.079	
50	.....	0.	
650	.....	.118	
50	.....	0.	
850	.....	.156	
50	.....	0.	
1,050	.....	.194	
50	.....	0.	
1,250	.....	.232	
50	.....	0.	
1,364	8,190	.....	

## DETAILS OF TRANSVERSE TESTS—Continued.

## RED TREAD, 6D, THIRD SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
50	.....	0.	Initial load.
250	.....	.040	
50	.....	0.	
450	.....	.061	
50	.....	0.	
650	.....	.123	
50	.....	.....	
850	.....	.165	
50	.....	.....	
1,050	.....	.209	
50	.....	0.	
1,250	.....	.262	
50	.....	.....	
1,435	9,140	.....	

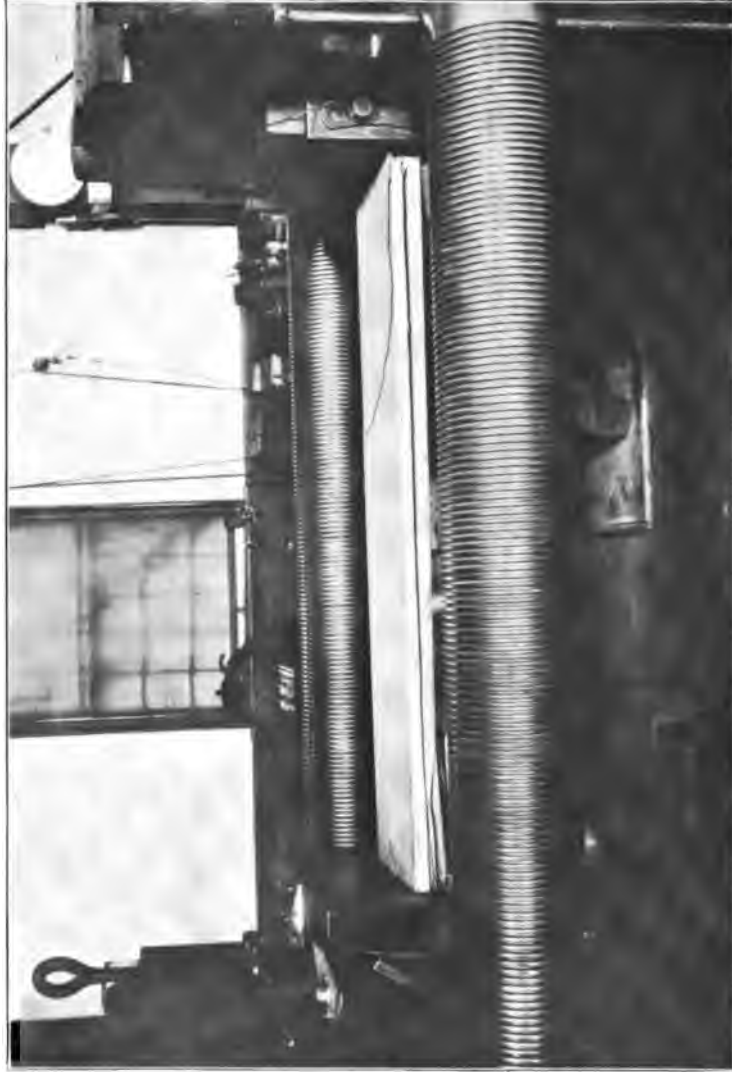
## PURPLE TREAD, 7D, FIRST SAMPLE.

Applied loads.		Deflec- tions.	Remarks.
Total.	Modulus of rupture per square inch.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	
50	.....	0.	Initial load.
250	.....	.046	
50	.....	.....	
450	.....	.087	
50	.....	.....	
650	.....	.127	
50	.....	.....	
850	.....	.167	
50	.....	.....	
1,050	.....	.210	
50	.....	.....	
1,250	.....	.258	
50	.....	.....	
1,450	.....	.295	
50	.....	0.	Ultimate strength.
1,556	9,530	.....	

## PURPLE TREAD, 7D, SECOND SAMPLE.

Applied loads.		Deflec- tions.	Remarks.	
Total.	Modulus of rupture per square inch.			
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>		
50	.....	0.	Initial load.	
250	.....	.062		
50	.....	0.		
450	.....	.108		
50	.....	0.		
650	.....	.154		
50	.....	0.		
850	.....	.206		
50	.....	0.		
1,050	.....	.....		
6,800	.....	.....		Ultimate strength.






PHOTOGRAPH OF SLAB MARKED 2C. AFTER FRACTURE. CRUSHING STRENGTH, 9,260 POUNDS PER SQUARE INCH.



Test No. 12023.

## COMPRESSION TESTS OF SLABS.



## GREEN SLAB.

Marks, 2D.

Dimensions, 12".01 × 1".96 × 60".

Sectional area, 23.54 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.          Opened seam along cleavage planes near one end of slab. E (1,000-5,000) = 13,963,000 pounds per square inch. Ultimate strength.
2,354	100	0.	0.	
4,708	200	.0002	.....	
9,416	400	.0007	.....	
14,124	600	.0012	.....	
18,832	800	.0017	.....	
23,540	1,000	.0023	0.	
47,080	2,000	.0044	0.	
70,620	3,000	.0065	0.	
94,160	4,000	.0088	0.	
117,700	5,000	.0109	0.	
190,800	8,110	.....	.....	

Seams at end gradually opened, finally splitting longitudinally the full length of the slab.

## GREEN SLAB.

Marks, 2C.

Dimensions, 12".01 × 1".97 × 60".

Sectional area, 23.66 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.          Opened seam at one end along cleavage planes. E (1,000-5,000) = 14,296,000 pounds per square inch. Ultimate strength.
2,366	100	0.	0.	
4,732	200	.0002	.....	
9,464	400	.0007	.....	
14,196	600	.0012	.....	
18,928	800	.0017	.....	
23,660	1,000	.0022	0.	
47,320	2,000	.0043	0.	
70,980	3,000	.0064	0.	
94,640	4,000	.0085	0.	
118,300	5,000	.0107	.0001	
219,000	9,290	.....	.....	

Crushed at ends and split longitudinally from end to end.

## GREEN SLAB.

Marks, 2C.

Dimensions, 12" × 1".98 × 60".

Sectional area, 23.76 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,376	100	0.	0.	Initial load.
4,752	200	.0008	.....	
9,504	400	.0008	.....	
14,256	600	.0014	.....	
19,008	800	.0019	.....	
23,760	1,000	.0023	0.	
47,520	2,000	.0043	0.	
71,280	3,000	.0063	0.	
95,040	4,000	.0063	0.	
205,000	8,630	.....	.....	

## RED SLAB.

Marks, 6D.

Dimensions, 12" × 2".04 × 60".03.

Sectional area, 24.48 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,448	100	0.	0.	Initial load.
4,896	200	.0001	.....	
9,792	400	.0004	.....	
14,688	600	.0007	.....	
19,584	800	.0010	.....	
24,480	1,000	.0013	0.	
48,960	2,000	.0030	0.	
73,440	3,000	.0049	0.	
97,920	4,000	.0066	0.	
122,400	5,000	.0085	0.	
146,880	6,000	.0105	0.	
171,360	7,000	.0124	0.	E (1,000-7,000) = 16,216,000 pounds per square inch. Ultimate strength.
267,000	10,910	.....	.....	

## RED SLAB.

Marks, 6C.

Dimensions, 12" × 1".99 × 60".05.

Sectional area, 23.88 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.          E (1,000-6,000)=14,563,000 pounds per square inch. Longitudinal seams opened. Ultimate strength.
2,888	100	0.	0.	
4,776	200	.0001	.....	
9,552	400	.0006	.....	
14,328	600	.0010	.....	
19,104	800	.0014	.....	
23,880	1,000	.0020	0.	
47,760	2,000	.0040	0.	
71,640	3,000	.0060	0.	
95,520	4,000	.0080	.0001	
119,400	5,000	.0101	.0001	
143,280	6,000	.0128	.0006	
150,000	6,280	.....	.....	
219,000	9,170	.....	.....	

Sustained the maximum load 3 minutes and then fractured by crushing at a place 16 inches from the end of the slab, and splitting longitudinally.

## RED SLAB.

Marks, 6C.

Dimensions, 12" × 1".95 × 60".

Sectional area, 23.40 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.       Longitudinal seam opened. E (1,000-5,000)=14,118,000 pounds per square inch. Ultimate strength.
2,940	100	0.	0.	
4,680	200	.0002	.....	
9,360	400	.0006	.....	
14,040	600	.0010	.....	
18,720	800	.0015	.....	
23,400	1,000	.0019	0.	
46,800	2,000	.0038	0.	
70,200	3,000	.0057	.0001	
93,600	4,000	.0077	.0001	
117,000	5,000	.0105	.0001	
135,800	5,800	.....	.....	

Crushed at one end and split longitudinally.

## PURPLE SLAB.

Marks, 7C.

Dimensions, 12".01 × 2" × 60".05.

Sectional area, 24.02 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  Opened longitudinal crack. E (1,000-4,000) = 16,667,000 pounds per square inch. Ultimate strength.
2,402	100	0.	0.	
4,804	200	.0002	.....	
9,608	400	.0005	.....	
14,412	600	.0009	.....	
19,216	800	.0018	.....	
24,020	1,000	.0015	0.	
48,040	2,000	.0035	0.	
72,060	3,000	.0054	.0002	
96,080	4,000	.0072	.0008	
229,100	9,540	.....	.....	

## PURPLE SLAB.

Marks, 7C.

Dimensions, 12" × 2".03 × 60".04.

Sectional area, 24.36 square inches.

Gauged length, 30".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (1,000-3,000) = 19,855,000 pounds per square inch.  Ultimate strength.
2,436	100	0.	0.	
4,872	200	.0008	.....	
9,744	400	.0007	.....	
14,616	600	.0013	.....	
19,488	800	.0015	.....	
24,360	1,000	.0019	.0005	
48,720	2,000	.0035	.0005	
73,080	3,000	.0056	.0011	
97,440	4,000	.0073	.0015	
121,800	5,000	.0100	.0010	
237,000	9,730	.....	.....	


---

---

**CEMENT.**

---

---



CEMENT.

COMPRESSION TESTS OF 4-INCH CUBES OF DIFFERENT BRANDS OF NEAT CEMENT.

ALPHA CEMENT, NEAT.

Water used in mixing, 25 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Mos.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.10	4.01	3.92	15.72	87,800	89,700	5,706	.....
7	.....	4.00	4.08	3.97	16.00	91,000	93,600	5,850	.....
7	.....	4.02	4.00	4.00	16.00	97,000	98,900	6,181	.....
7	.....	4.08	4.02	4.00	16.08	89,900	95,500	5,939	.....
7	.....	4.12	4.00	4.01	16.04	101,500	102,500	6,390	6,010
.....	1	4.00	4.04	4.00	16.16	.....	117,500	7,271	.....
.....	1	3.99	4.05	4.01	16.24	114,000	116,000	7,148	.....
.....	1	4.05	4.02	3.97	15.96	101,000	105,500	6,610	.....
.....	1	4.00	4.07	4.00	16.28	.....	123,000	7,556	.....
.....	1	4.08	3.98	4.00	15.92	.....	129,100	8,109	7,840
.....	3	4.05	3.98	4.00	15.92	.....	131,100	8,235	.....
.....	3	4.07	4.01	3.96	15.88	.....	143,200	9,018	.....
.....	3	4.01	3.99	4.00	15.96	.....	128,400	8,645	.....
.....	3	4.06	4.00	3.99	15.96	.....	143,700	9,004	8,580

ATLAS CEMENT, NEAT.

Water used in mixing, 25 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Mos.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.03	3.98	4.08	16.24	.....	87,200	3,520	.....
7	.....	3.99	4.10	4.09	16.77	.....	86,700	3,380	.....
7	.....	4.00	4.05	4.09	16.56	.....	86,500	3,410	.....
7	.....	4.02	3.98	4.05	16.12	.....	89,800	3,710	.....
7	.....	3.96	4.05	4.04	16.36	.....	86,100	3,430	3,490
.....	1	3.97	4.08	4.08	16.24	.....	89,800	5,590	.....
.....	1	4.00	4.08	4.09	16.48	.....	88,300	5,360	.....
.....	1	4.00	4.01	4.00	16.04	.....	83,200	5,190	.....
.....	1	3.98	4.05	4.10	16.61	.....	89,100	5,360	.....
.....	1	4.00	4.06	4.00	16.24	.....	88,000	5,420	5,370
.....	3	3.95	4.07	4.01	16.32	83,800	95,500	5,850	.....
.....	3	3.97	4.09	3.99	16.32	.....	95,400	5,850	.....
.....	3	3.98	4.08	3.99	16.08	.....	85,800	5,980	.....
.....	3	3.98	4.08	4.00	16.12	.....	94,000	5,830	5,870

LEHIGH CEMENT, NEAT.

FIRST SERIES.

Water used in mixing, 26.8 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Mos.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.02	4.07	3.95	16.08	.....	69,900	4,347	.....
7	.....	4.02	4.01	4.10	16.44	.....	67,300	4,097	.....
7	.....	4.09	4.01	4.02	16.12	.....	68,000	4,218	.....
7	.....	4.07	4.01	4.04	16.20	.....	72,400	4,469	4,280
.....	1	4.14	4.00	3.99	15.96	87,000	89,900	5,333	.....
.....	1	4.10	4.02	3.99	16.04	93,800	95,500	5,954	.....
.....	1	4.03	3.94	4.03	15.88	87,900	87,900	5,585	.....
.....	1	4.04	4.01	4.00	16.04	84,100	84,100	5,243	5,590
.....	3	4.08	4.05	4.00	16.20	97,600	108,500	6,399	.....
.....	3	4.05	4.08	4.00	16.32	97,600	97,600	5,980	.....
.....	3	4.00	4.05	4.00	16.20	105,000	106,300	6,562	6,310

LEHIGH CEMENT, NEAT.

SECOND SERIES.

Water used in mixing, 18 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.04	3.98	4.02	16.00	.....	91,500	5,720	.....
7	.....	4.16	3.97	4.03	16.00	.....	79,900	4,990	.....
7	.....	3.99	4.07	4.03	16.40	.....	99,500	6,070	.....
7	.....	4.05	3.98	4.06	16.16	.....	102,100	6,320	5,780
.....	1	3.99	4.10	3.96	16.24	.....	99,500	6,130	.....
.....	1	3.99	4.10	3.98	16.32	70,000	95,100	5,830	.....
.....	1	3.99	4.06	4.00	16.24	.....	104,600	6,440	.....
.....	1	4.00	4.05	4.00	16.20	81,700	89,700	5,540	5,990
.....	3	4.00	4.06	4.00	16.24	117,000	118,100	7,270	.....
.....	3	3.99	4.10	4.05	16.60	102,000	113,000	6,810	.....
.....	3	3.96	4.10	3.99	16.36	103,000	110,000	6,720	.....
.....	3	3.96	4.01	4.05	16.24	118,500	113,500	6,990	.....
.....	3	4.00	4.06	4.02	16.32	115,000	116,200	7,120	6,980



## STAR PORTLAND CEMENT, NEAT.

## WITH PLASTER.

Water used in mixing, 22½ per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.		Total.			Per square inch.	Mean.	
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	3.98	4.04	4.08	16.48	.....	100,100	6,074	.....	
7	.....	3.99	4.04	4.00	16.16	.....	101,200	6,282	.....	
7	.....	4.01	3.97	4.00	15.88	79,000	87,000	5,479	.....	
7	.....	4.00	3.98	3.91	15.56	.....	98,700	6,022	5,860	
.....	1	4.00	4.02	3.90	15.28	102,200	102,200	6,688	.....	
.....	1	4.00	4.05	3.90	15.80	100,200	115,100	7,158	.....	
.....	1	4.00	3.99	4.01	16.00	120,600	120,600	7,688	.....	
.....	1	4.01	4.00	3.86	15.44	101,500	107,800	6,949	7,080	
.....	3	3.98	4.01	4.08	16.16	140,800	140,800	8,713	.....	
.....	3	4.07	3.99	3.99	15.92	119,900	119,900	7,581	.....	
.....	3	4.06	3.98	4.02	16.00	131,400	131,400	8,213	.....	
.....	3	4.07	3.99	4.02	16.04	132,000	132,000	8,229	8,170	

## STAR PORTLAND CEMENT, NEAT.

## WITH PLASTER.

Water used in mixing, 25 per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.		Total.			Per square inch.	Mean.	
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	4.08	3.98	4.07	16.20	.....	101,300	6,264	.....	
7	.....	3.99	4.06	4.06	16.56	.....	105,200	6,367	.....	
7	.....	4.00	4.00	4.08	16.82	.....	102,300	6,268	.....	
7	.....	4.02	4.00	4.10	16.40	.....	105,000	6,403	6,320	
.....	1	4.02	3.98	4.00	15.92	.....	106,800	6,709	.....	
.....	1	4.02	3.98	4.09	16.23	.....	110,100	6,783	.....	
.....	1	4.04	3.97	4.07	16.16	.....	106,500	6,560	.....	
.....	1	4.01	4.00	4.04	16.16	.....	111,900	6,925	6,750	
.....	3	4.02	3.98	4.07	16.12	.....	131,500	8,157	.....	
.....	3	3.99	4.06	4.03	16.36	125,900	134,100	8,197	.....	
.....	3	4.02	3.97	4.06	16.12	.....	132,200	8,201	.....	
.....	3	4.04	3.96	4.06	16.06	125,100	131,000	8,147	8,180	

## STAR PORTLAND CEMENT, NEAT.

## WITH PLASTER.

Water used in mixing, 30 per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.		Total.			Per square inch.	Mean.	
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	3.95	4.05	4.19	16.97	.....	105,800	6,236	.....	
8	.....	3.96	4.01	4.18	16.76	.....	105,700	6,307	.....	
8	.....	4.09	3.98	4.20	16.72	.....	99,100	5,927	.....	
8	.....	3.97	4.06	4.18	16.97	.....	103,400	6,848	6,840	
.....	1	4.04	3.97	4.08	16.20	.....	109,500	6,759	.....	
.....	1	4.02	4.00	4.18	16.72	.....	62,000	116,000	6,938	
.....	1	4.00	4.00	4.11	16.44	.....	76,000	112,000	6,818	
.....	1	3.97	4.01	4.08	16.36	.....	104,000	112,900	6,901	
.....	3	3.96	4.01	4.12	16.52	.....	102,000	126,200	7,689	
.....	3	4.00	3.96	4.10	16.24	.....	106,000	126,000	7,759	
.....	3	4.00	4.02	4.09	16.44	.....	103,000	133,200	8,102	
.....	3	4.01	3.99	4.09	16.32	.....	76,000	120,500	7,384	

## STAR PORTLAND CEMENT, NEAT.

## WITHOUT PLASTER.

Water used in mixing, 22½ per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.		Total.			Per square inch.	Mean.	
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	4.05	4.00	4.10	16.40	.....	69,200	4,220	.....	
7	.....	3.97	4.08	4.15	16.72	.....	75,800	4,533	.....	
7	.....	3.96	4.00	4.15	16.60	.....	80,100	4,825	.....	
7	.....	3.95	4.06	4.16	16.89	.....	82,700	4,896	4,620	
.....	1	3.97	4.03	4.10	16.52	.....	82,500	4,994	.....	
.....	1	3.97	4.02	4.08	16.40	.....	77,200	4,707	.....	
.....	1	4.01	4.00	4.10	16.40	.....	77,400	5,390	.....	
.....	1	3.98	4.01	4.07	16.32	.....	92,000	92,000	6,637	
.....	3	4.04	3.96	4.10	16.24	.....	93,300	93,300	5,745	
.....	3	4.02	3.97	4.10	16.28	.....	97,600	97,600	5,995	
.....	3	4.02	3.97	4.13	16.40	.....	92,200	92,200	5,622	
.....	3	4.00	3.96	4.10	16.24	.....	103,100	103,100	6,849	

STAR PORTLAND CEMENT. NEAT.

WITHOUT PLASTER.

Water used in mixing, 25 per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.					Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	3.99	4.07	3.99	16.24	.....	96,800	6,990	.....	
7	.....	4.00	4.05	4.00	16.20	.....	86,800	5,358	.....	
7	.....	3.99	4.02	4.02	16.16	.....	88,700	5,489	.....	
7	.....	4.01	4.09	4.08	16.48	.....	89,800	5,449	5,560	
.....	1	4.00	4.04	4.00	16.16	.....	99,100	6,182	.....	
.....	1	4.07	3.99	4.06	16.20	.....	86,800	5,358	.....	
.....	1	4.01	4.00	4.02	16.08	.....	100,100	6,225	.....	
.....	1	4.08	4.00	4.06	16.20	.....	100,400	6,198	5,980	
.....	3	4.06	4.02	4.01	16.12	106,000	121,600	7,543	.....	
.....	3	4.09	4.00	4.08	16.12	122,000	124,500	7,723	.....	
.....	3	4.08	4.03	3.99	16.08	104,000	125,900	7,880	.....	
.....	3	4.00	4.06	4.01	16.24	89,000	126,800	7,808	7,780	

STAR PORTLAND CEMENT, NEAT.

WITHOUT PLASTER.

Water used in mixing, 30 per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.					Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	3.96	4.02	4.13	16.60	.....	78,100	4,706	.....	
8	.....	4.06	3.99	4.20	16.76	64,100	83,600	4,983	.....	
8	.....	4.06	3.99	4.19	16.72	.....	80,600	4,821	.....	
8	.....	4.06	3.97	4.14	16.44	.....	92,060	5,599	5,080	
.....	1	3.99	4.08	4.20	16.93	74,000	89,900	5,310	.....	
.....	1	3.99	4.00	4.16	16.60	91,600	96,200	5,796	.....	
.....	1	3.94	4.02	4.17	16.76	85,800	93,400	5,573	.....	
.....	1	3.96	4.06	4.14	16.77	97,000	97,500	5,814	5,620	
.....	3	3.98	4.00	4.07	16.28	99,800	114,000	7,002	.....	
.....	3	3.96	4.01	4.12	16.62	99,000	118,200	7,156	.....	
.....	3	3.98	4.01	4.21	16.88	109,000	109,000	6,457	.....	
.....	3	3.97	4.08	4.11	16.66	107,400	110,000	6,648	6,810	

WHITEHALL CEMENT, NEAT.

Water used in mixing, 25 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	3.95	3.92	4.04	15.84	.....	88,600	6,568	.....
7	.....	4.04	3.94	3.98	15.80	.....	76,100	4,878	.....
7	.....	4.05	3.96	3.96	15.68	.....	86,900	5,788	.....
7	.....	4.04	3.98	3.95	15.72	88,200	94,700	6,024	.....
7	.....	4.06	3.95	3.98	15.64	.....	92,400	5,908	5,630
.....	1	3.98	4.01	4.00	16.04	.....	108,500	6,764	.....
.....	1	3.98	4.02	3.97	15.96	.....	115,400	7,231	.....
.....	1	4.00	4.02	4.00	16.08	85,000	95,300	5,927	.....
.....	1	4.00	4.07	4.00	16.28	97,000	102,000	6,265	.....
.....	1	3.97	4.02	4.00	16.08	.....	112,900	7,021	6,640
.....	3	3.96	4.04	3.97	16.04	.....	120,500	7,512	.....
.....	3	3.98	4.04	4.00	16.16	.....	130,800	8,063	.....
.....	3	3.96	4.03	3.95	15.92	.....	122,900	7,720	.....
.....	3	3.96	4.05	3.98	16.12	.....	116,800	7,215	7,680

ALSEN CEMENT, NEAT.

Water used in mixing, 29.2 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.06	4.09	3.96	16.20	.....	64,800	3,380	.....
7	.....	4.06	4.05	3.97	16.08	.....	57,700	3,590	.....
7	.....	3.99	4.10	4.02	16.43	.....	57,300	3,490	.....
7	.....	4.04	4.12	3.99	16.44	.....	57,500	3,500	.....
7	.....	4.01	4.08	3.98	16.04	.....	57,400	3,580	3,510
.....	1	3.99	4.06	4.07	16.52	.....	81,900	4,960	.....
.....	1	3.98	4.08	4.09	16.69	.....	81,500	4,880	.....
.....	1	3.99	4.04	4.06	16.43	.....	79,600	4,830	.....
.....	1	4.00	4.03	4.09	16.43	.....	82,300	4,990	.....
.....	1	3.99	4.07	4.02	16.36	.....	82,100	5,020	4,940
.....	3	3.97	4.06	4.05	16.44	91,000	93,500	5,690	.....
.....	3	3.96	4.06	4.07	16.52	.....	85,200	5,190	.....
.....	3	3.97	4.06	4.12	16.73	76,000	93,900	5,610	.....
.....	3	3.99	4.03	4.08	16.44	.....	93,700	5,700	.....
.....	3	3.98	4.04	4.07	16.44	.....	88,300	5,370	5,510

JOSSON CEMENT, NEAT.

Water used in mixing, 26.7 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.00	4.10	3.91	16.03	39,900	45,800	2,860	.....
7	.....	4.04	4.00	4.00	16.00	.....	45,300	2,710	.....
7	.....	3.95	4.02	3.95	15.92	.....	45,200	2,710	.....
7	.....	3.99	4.04	4.00	16.16	.....	44,300	2,740	.....
7	.....	4.07	4.00	4.01	16.04	.....	48,500	2,710	2,750
.....	1	4.02	4.00	4.00	16.00	.....	67,800	4,240	.....
.....	1	4.05	3.99	4.00	15.96	.....	64,400	4,040	.....
.....	1	4.09	3.99	3.98	15.80	.....	61,500	3,890	.....
.....	1	4.00	4.01	3.98	15.96	.....	63,500	3,980	.....
.....	1	4.06	4.00	4.00	16.00	.....	64,000	4,000	4,080
.....	3	4.06	4.00	4.02	16.08	.....	73,700	4,580	.....
.....	3	3.98	4.00	3.98	15.92	.....	75,100	4,720	.....
.....	3	4.06	4.01	3.92	15.72	.....	76,600	4,570	.....
.....	3	4.08	4.00	3.98	15.92	.....	74,100	4,650	.....
.....	3	4.08	4.00	3.99	15.96	.....	71,800	4,500	4,660

CATHEDRAL CEMENT, NEAT.

FIRST SERIES.

Water used in mixing, 26.7 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.00	4.08	4.01	16.16	.....	36,500	2,260	.....
7	.....	4.00	3.96	4.02	15.92	.....	34,200	2,150	.....
7	.....	3.95	4.04	4.00	16.16	.....	33,640	2,080	.....
7	.....	4.02	4.07	4.00	16.28	.....	35,050	2,150	.....
7	.....	3.95	4.04	4.02	16.24	.....	30,900	1,900	2,110
.....	1	3.97	4.04	3.98	15.88	.....	46,100	2,900	.....
.....	1	3.97	4.04	4.00	16.16	.....	45,500	3,000	.....
.....	1	3.96	4.05	4.08	16.32	.....	50,100	3,070	.....
.....	1	3.95	4.01	4.06	16.36	.....	45,700	2,980	.....
.....	1	3.98	4.04	3.99	16.12	.....	47,000	2,920	2,970
.....	3	3.95	4.05	3.99	16.20	.....	55,700	3,500	.....
.....	3	3.98	4.05	4.00	16.20	.....	53,900	3,380	.....
.....	3	3.97	4.05	4.08	16.36	.....	60,800	3,720	.....
.....	3	3.95	4.00	4.00	16.00	.....	49,900	3,120	.....
.....	3	3.99	4.08	3.99	16.08	.....	55,900	3,480	3,480

CATHEDRAL CEMENT, NEAT.

SECOND SERIES.

Water used in mixing, 18 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
8	.....	4.09	3.99	4.05	16.16	.....	59,900	3,710	.....
8	.....	3.99	4.07	4.10	16.69	.....	66,300	3,970	.....
8	.....	4.10	3.99	3.73	14.88	.....	61,200	4,110	.....
8	.....	4.00	4.07	4.06	16.52	.....	56,500	3,420	.....
8	.....	3.99	4.07	4.07	16.56	.....	67,500	4,060	3,960
.....	1	4.06	3.98	4.00	15.92	.....	63,800	4,010	.....
.....	1	4.04	3.98	4.02	16.00	.....	63,400	3,960	.....
.....	1	4.08	3.99	4.03	16.08	.....	69,300	4,310	.....
.....	1	4.09	4.00	4.06	16.24	.....	68,000	4,190	.....
.....	1	4.06	3.99	3.79	15.12	.....	51,000	3,570	3,970
.....	3	4.05	3.99	4.01	16.00	.....	75,500	4,780	.....
.....	3	4.09	3.98	4.01	15.96	.....	39,000	4,610	.....
.....	3	4.14	3.99	3.98	15.88	.....	62,000	4,410	.....
.....	3	4.18	3.98	4.02	16.00	.....	64,000	4,200	4,490

SILICA CEMENT, NEAT.

FIRST SERIES.

Water used in mixing, 28½ per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.06	4.00	4.06	16.24	.....	19,950	1,228	.....
7	.....	4.00	4.09	4.08	16.68	.....	22,600	1,355	.....
7	.....	4.03	3.98	4.13	16.44	.....	20,900	1,271	.....
7	.....	3.96	4.03	4.07	16.40	.....	19,980	1,218	.....
7	.....	3.96	4.06	4.10	16.64	.....	23,500	1,412	1,300
.....	1	3.96	4.15	4.04	16.77	.....	27,100	1,616	.....
.....	1	3.97	4.02	4.18	16.80	.....	30,600	1,821	.....
.....	1	3.96	4.04	4.07	16.44	.....	33,500	2,038	.....
.....	1	3.98	4.04	4.06	16.40	.....	27,900	1,701	.....
.....	1	4.00	4.13	4.00	16.69	.....	29,500	1,768	1,790
.....	3	3.97	4.01	4.10	16.44	.....	32,800	1,995	.....
.....	3	3.99	4.05	4.05	16.40	.....	34,100	2,079	.....
.....	3	3.96	4.08	4.09	16.69	.....	34,500	2,067	.....
.....	3	3.98	4.01	4.13	16.76	.....	39,200	2,339	.....
.....	3	3.96	4.05	4.10	16.61	.....	34,500	2,077	2,110
.....	12	3.96	4.03	4.19	16.89	.....	33,600	1,990	.....
.....	12	3.98	4.07	4.10	16.69	.....	39,900	2,390	2,190

SILICA CEMENT, NEAT.

SECOND SERIES.

Water used in mixing, 18 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
8	.....	4.00	3.92	4.13	16.19	.....	47,100	2,910	.....
8	.....	4.06	3.99	4.00	15.96	.....	53,100	3,380	.....
8	.....	4.06	4.00	3.95	15.80	.....	53,400	3,380	.....
8	.....	4.02	4.06	3.86	15.67	.....	43,600	2,780	.....
8	.....	3.99	3.98	4.08	16.24	.....	46,500	2,860	3,050
.....	1	4.00	4.03	3.98	16.04	.....	54,900	3,420	.....
.....	1	4.00	4.02	4.08	16.40	52,300	60,600	3,700	.....
.....	1	4.08	4.01	4.00	16.04	.....	65,900	4,100	.....
.....	1	4.05	4.01	3.98	15.96	.....	39,500	2,480	.....
.....	1	4.07	4.00	4.06	16.24	.....	59,400	3,660	3,470
.....	3	4.08	3.98	4.05	16.12	66,000	76,100	4,720	.....
.....	3	4.00	4.09	4.03	16.48	68,200	70,500	4,280	.....
.....	3	4.08	4.00	4.02	16.08	72,500	73,600	4,580	.....
.....	3	3.98	4.05	4.06	16.44	70,600	70,600	4,290	4,470

AUSTIN CEMENT, NEAT.

Water used in mixing, 35.4 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	3.98	4.02	4.06	16.32	.....	5,950	360	.....
7	.....	4.05	3.98	4.10	16.32	.....	5,420	350	.....
7	.....	3.98	4.04	4.08	16.48	.....	6,100	370	.....
7	.....	4.03	4.00	4.02	16.08	.....	5,430	340	.....
7	.....	4.03	3.95	4.05	16.00	.....	6,060	380	356
.....	1	3.97	4.05	4.14	16.77	.....	15,900	950	.....
.....	1	3.99	4.00	4.08	16.32	.....	19,400	1,190	.....
.....	1	3.98	4.07	4.06	16.52	.....	18,700	1,130	.....
.....	1	3.95	4.06	4.10	16.65	.....	18,100	1,090	.....
.....	1	3.97	4.07	4.08	16.61	.....	18,500	1,110	1,090
.....	3	3.98	4.01	4.12	16.52	11,100	23,100	1,400	.....
.....	3	3.95	4.07	4.01	16.32	10,000	24,200	1,480	.....
.....	3	3.97	4.01	4.10	16.44	17,500	24,900	1,510	.....
.....	3	3.97	4.08	4.08	16.65	26,200	27,800	1,640	.....
.....	3	3.95	4.06	4.10	16.65	25,400	26,900	1,620	1,580

BONNEVILLE IMPROVED CEMENT, NEAT.

Water used in mixing, 38.7 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.02	3.97	4.10	16.28	.....	9,500	583	.....
7	.....	4.11	3.98	4.08	16.24	.....	9,500	585	.....
7	.....	4.08	3.98	4.10	16.32	.....	10,100	619	.....
7	.....	3.98	4.02	4.09	16.44	.....	10,900	663	.....
7	.....	4.02	3.97	4.05	16.08	.....	10,500	653	620
.....	1	3.99	4.08	4.06	16.56	.....	19,480	1,171	.....
.....	1	3.97	4.07	4.07	16.56	.....	17,900	1,061	.....
.....	1	4.00	4.02	4.10	16.48	.....	18,500	1,123	.....
.....	1	4.00	4.01	4.08	16.16	.....	18,600	1,151	.....
.....	1	3.98	4.02	4.12	16.56	.....	18,800	1,185	1,180
.....	3	4.00	4.04	4.08	16.48	21,000	26,300	1,566	.....
.....	3	3.96	4.06	4.08	16.38	21,500	24,200	1,479	.....
.....	3	3.96	4.06	4.06	16.52	20,000	26,500	1,604	.....
.....	3	3.97	4.01	4.06	16.28	.....	23,900	1,468	.....
.....	3	3.98	4.05	4.11	16.65	24,100	27,200	1,634	1,560

HOFFMAN CEMENT, NEAT.

Water used in mixing, 36.2 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.05	3.96	4.05	16.04	.....	7,100	440	.....
7	.....	3.99	4.01	3.98	15.98	.....	7,980	500	.....
7	.....	4.00	4.09	4.10	16.77	.....	7,600	450	.....
7	.....	4.00	4.08	4.08	16.65	.....	7,900	470	.....
7	.....	3.99	4.09	4.08	16.69	.....	7,650	460	464
.....	1	4.09	4.00	4.05	16.20	.....	13,600	840	.....
.....	1	4.05	4.01	4.05	16.24	.....	12,500	770	.....
.....	1	4.02	4.09	4.09	16.73	.....	13,100	780	.....
.....	1	4.00	4.11	4.07	16.73	.....	12,900	770	.....
.....	1	4.05	3.99	4.06	16.20	.....	12,800	790	790
.....	3	4.00	3.96	4.05	16.04	14,900	20,500	1,280	.....
.....	3	4.03	3.99	4.06	16.20	.....	20,500	1,270	.....
.....	3	4.04	4.01	4.06	16.28	.....	19,900	1,220	.....
.....	3	4.06	3.96	4.07	16.20	.....	19,100	1,180	.....
.....	3	4.03	3.95	4.01	15.84	.....	18,800	1,190	1,230



MANKATO CEMENT, NEAT.

Water used in mixing, 41.2 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.01	3.96	4.02	15.92	.....	9,800	620	.....
7	.....	4.02	3.99	4.00	15.96	.....	8,520	580	.....
7	.....	3.96	4.01	4.00	16.04	.....	9,190	570	.....
7	.....	4.05	3.99	4.00	15.96	.....	9,020	570	.....
7	.....	4.04	3.99	4.03	16.08	.....	8,600	540	566
.....	1	4.04	3.96	4.05	16.12	.....	16,500	1,020	.....
.....	1	3.97	4.02	4.01	16.12	.....	16,700	1,040	.....
.....	1	3.96	4.06	4.01	16.23	.....	16,000	980	.....
.....	1	3.97	4.06	4.05	16.52	.....	16,300	990	.....
.....	1	3.99	3.99	4.02	16.04	.....	17,300	1,080	1,020
.....	3	3.96	4.02	4.03	16.20	.....	23,400	1,440	.....
.....	3	3.97	4.06	4.09	16.61	.....	23,600	1,420	.....
.....	3	3.96	4.02	4.10	16.48	.....	23,800	1,440	.....
.....	3	3.99	4.06	4.09	16.61	20,000	23,200	1,400	.....
.....	3	3.96	4.02	4.05	16.23	.....	22,600	1,390	1,420

NEWARK AND ROSENDALE CEMENT, NEAT.

Water used in mixing, 38.7 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.02	3.99	4.05	16.16	.....	7,260	449	.....
7	.....	4.00	4.11	4.04	16.60	.....	6,300	390	.....
7	.....	4.05	3.98	4.13	16.44	.....	6,900	420	.....
8	.....	4.03	4.00	4.02	16.08	.....	6,540	407	.....
7	.....	3.96	4.02	4.07	16.36	.....	6,200	379	407
.....	1	4.04	4.06	3.97	16.20	.....	18,800	1,160	.....
.....	1	3.96	4.12	4.04	16.64	.....	16,500	992	.....
.....	1	4.05	4.15	3.97	16.48	.....	17,600	1,068	.....
.....	1	4.06	4.02	3.96	16.00	.....	18,100	1,131	1,090
.....	3	4.06	3.99	4.10	16.36	.....	22,100	1,351	.....
.....	3	4.06	3.98	4.12	16.40	22,200	23,400	1,427	.....
.....	3	4.04	4.00	4.09	16.36	22,700	23,800	1,455	.....
.....	3	4.05	3.99	4.13	16.48	20,400	25,100	1,523	.....
.....	3	3.99	4.05	4.10	16.60	.....	23,800	1,434	1,440
.....	12	3.96	3.97	4.12	16.36	21,000	24,950	1,590	.....
.....	12	3.97	4.04	4.08	16.48	.....	23,300	1,780	.....
.....	12	3.96	4.00	4.02	16.08	22,800	23,300	1,450	1,590

NORTON CEMENT, NEAT.

Water used in mixing, 39.6 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.02	3.96	4.04	16.08	.....	7,620	470	.....
7	.....	3.99	4.02	4.07	16.36	.....	8,150	500	.....
7	.....	4.03	3.96	4.08	16.24	.....	6,920	430	.....
7	.....	3.96	4.02	4.06	16.32	.....	7,900	490	.....
7	.....	3.98	4.04	4.09	16.52	.....	7,920	490	472
.....	1	3.97	4.04	4.05	16.36	.....	15,900	970	.....
.....	1	3.98	4.00	4.12	16.43	.....	14,800	900	.....
.....	1	3.97	4.03	4.05	16.32	.....	13,700	840	.....
.....	1	3.97	4.06	4.01	16.24	.....	13,500	830	.....
.....	1	3.99	4.06	4.02	16.32	.....	14,100	860	880
.....	3	3.98	4.05	4.02	16.28	24,800	26,100	1,600	.....
.....	3	3.99	4.02	4.01	16.12	.....	27,100	1,690	.....
.....	3	3.98	4.04	4.03	16.28	.....	27,000	1,660	.....
.....	3	3.98	4.04	4.06	16.40	.....	24,200	1,490	.....
.....	3	3.98	4.11	4.05	16.65	14,600	23,700	1,420	1,570

OBELISK CEMENT, NEAT.

Water used in mixing, 35.8 per cent.  
Set in air.

Age.		Dimensions.			Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.				Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.
7	.....	4.05	4.00	3.99	15.96	.....	11,800	739	.....
7	.....	4.01	4.00	4.02	16.08	.....	12,600	784	.....
7	.....	4.05	4.00	4.02	16.08	.....	12,400	771	.....
7	.....	4.08	4.00	3.99	15.96	.....	12,000	752	.....
7	.....	4.00	4.03	4.00	16.12	.....	11,400	707	750
.....	1	4.08	3.97	4.02	15.96	11,000	18,100	1,134	.....
.....	1	4.04	4.01	4.01	16.08	.....	23,100	1,437	.....
.....	1	3.99	4.05	4.02	16.28	.....	22,800	1,400	.....
.....	1	4.00	4.00	4.06	16.24	.....	23,600	1,453	.....
.....	1	3.99	4.06	4.02	16.32	20,400	22,300	1,366	1,360
.....	3	3.96	4.05	4.05	16.40	35,500	36,500	2,226	.....
.....	3	3.99	4.04	4.04	16.32	.....	35,700	2,188	.....
.....	3	4.00	4.02	4.10	16.43	.....	35,500	2,154	.....
.....	3	4.06	4.00	4.03	16.12	31,200	34,600	2,146	.....
.....	3	4.05	3.99	4.00	15.96	.....	37,700	2,362	2,220

POTOMAC CEMENT, NEAT.

Water used in mixing, 39.2 per cent.  
Set in air.

Age.		Dimensions.				Sectional area.	First crack.	Compressive strength.		
		Height.	Compressed surface.					Total.	Per square inch.	Mean.
Days.	Months.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	Pounds.	
7	.....	3.97	4.00	4.10	16.40	.....	6,680	407	.....	
7	.....	3.98	4.01	4.04	16.20	.....	6,960	430	.....	
7	.....	3.98	4.03	4.02	16.20	.....	7,100	438	.....	
7	.....	4.04	4.01	4.00	16.04	.....	6,850	427	.....	
7	.....	3.99	4.09	4.08	16.48	.....	6,820	414	423	
.....	1	3.96	4.08	4.02	16.20	.....	14,100	870	.....	
.....	1	3.98	3.98	4.06	16.16	.....	13,800	854	.....	
.....	1	3.96	4.00	4.06	16.24	.....	12,200	751	.....	
.....	1	3.98	4.04	4.03	16.28	.....	14,100	866	.....	
.....	1	3.97	4.08	4.04	16.28	.....	14,100	860	840	
.....	3	4.08	3.97	4.01	15.92	16,700	18,700	1,175	.....	
.....	3	4.02	3.99	4.04	16.12	13,400	16,200	1,005	.....	
.....	3	4.05	3.99	4.02	16.04	7,000	16,700	1,041	.....	
.....	3	4.05	3.99	4.00	15.96	.....	19,000	1,190	.....	
.....	3	3.97	4.06	4.00	16.24	18,200	18,700	1,151	1,110	
.....	12	3.99	4.04	4.02	16.24	.....	16,300	1,000	.....	
.....	12	3.98	4.04	4.05	16.36	9,200	19,500	1,190	.....	
.....	12	3.98	4.02	4.01	16.12	10,600	19,200	1,190	.....	
.....	12	3.97	4.00	4.08	16.12	9,500	16,500	1,020	1,100	

RETARDED SET SERIES.

ADDITIONAL TESTS, CUBES SET IN AIR.

Marks, \*J 17.

Composition: Star cement, with plaster, neat.

Original water used in gauging, 32.9 per cent of cement.

Age, 9 months.

Retarded 102 hours.

For earlier tests see Report, 1901, page 509.

Marks.	Dimensions.				Sectional area.	First crack.	Compressive strength.	
	Height.	Compressed surface.					Total.	Per square inch.
	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	
102 ☆J 17 (4) .....	4.00	3.96	3.97	15.72	7,040	8,010	510	
102 ☆J 17 (5) .....	4.03	3.95	3.99	15.76	7,830	7,380	465	
102 ☆J 17 (6) .....	4.01	3.93	3.97	15.60	8,800	8,750	561	

The three following cubes were immersed in water 24 hours.

Marks.	Weight before immersion.	Weight after immersion.
102 ☆ J 17 (7) .....	Lbs. oza. 3 0	Lbs. oza. 3 14½
102 ☆ J 17 (8) .....	3 0	3 14½
102 ☆ J 17 (9) .....	3 ½	3 14

The cubes were taken from the bath and immediately tested.

Marks.	Dimensions.			Sectional area.	First crack.	Compressive strength.	
	Height.	Compressed surface.				Total.	Per square inch.
	<i>Inches.</i>	<i>Inches.</i>	<i>Inches.</i>	<i>Sq. inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>
102 ☆ J 17 (7) .....	4.01	3.96	3.98	15.76	6,240	6,240	396
102 ☆ J 17 (8) .....	4.08	3.96	4.02	15.92	7,100	7,100	446
102 ☆ J 17 (9) .....	4.02	3.94	4.01	15.80	5,200	5,200	329

The next three cubes were immersed in water 24 hours, then allowed to dry in the open air 12 days, at the expiration of which time they were tested.

Marks.	Weight before immersion.	Weight after immersion.	Weight after drying in open air 12 days.
102 ☆ J 17 (10) .....	Lbs. oza. 2 16½	Lbs. oza. 3 14	Lbs. oza. 3 2½
102 ☆ J 17 (11) .....	3 ½	3 14½	3 4
102 ☆ J 17 (12) .....	3 ½	3 14½	3 4½

Marks.	Dimensions.			Sectional area.	First crack.	Compressive strength.	
	Height.	Compressed surface.				Total.	Per square inch.
	<i>Inches.</i>	<i>Inches.</i>	<i>Inches.</i>	<i>Sq. inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>
102 ☆ J 17 (10) .....	4.02	3.94	4.00	15.76	6,980	6,980	443
102 ☆ J 17 (11) .....	4.01	3.95	4.10	16.20	6,600	7,320	452
102 ☆ J 17 (12) .....	4.02	3.94	4.00	15.76	7,840	7,840	497

CEMENTS WHICH SET IN AIR AT DIFFERENT TEMPERATURES.

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH WERE EXPOSED TO ° F. TEMPERATURE WHILE SETTING, AND SUBSEQUENTLY AT 70° F. ADDITIONAL TESTS.

[See Report 1901, p. 581, for earlier tests of this series.]

Marks.	Brand of cement.	Composition.			Time of setting in air at temperature of—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.	
		Ce-ment.	Sand.	Water.	Year.	Mo. Days.	70° F. Days.	Height.	Compressed surface.	Total.		Per square inch.	Mean.			
☆ 1 × 1 F 15...	Star	1	1	36.1	P. cl.	9	7	3	2.01	2.08	2.09	Sq. in.	Pounds.	Pounds.	Pounds.	
		1	1	36.1	1	2.01	2.07	2.01	4.16	2.01	2.01	4.22	3,280	798	770	
		1	1	36.1	1	2.01	2.10	2.00	4.20	2.00	2.00	4.20	3,650	877	864	
		1	1	36.1	1	2.02	2.13	2.02	4.30	2.02	2.02	4.30	4,010	940	940	
		1	1	36.1	1	2.00	2.09	2.00	4.18	2.00	2.00	4.20	3,580	862	862	
		1	1	36.1	1	2.00	2.09	2.00	4.18	2.00	2.00	4.20	3,220	748	748	
		1	1	36.1	1	2.06	2.09	2.00	4.18	2.06	2.00	4.18	3,400	913	913	
		1	1	36.1	1	2.06	2.15	2.02	4.24	2.06	2.02	4.18	3,810	911	911	
		1	1	36.1	1	2.02	2.06	2.02	4.24	2.02	2.00	4.12	3,100	714	714	
		1	1	36.1	1	2.01	2.02	2.00	4.12	2.01	2.00	4.12	3,910	949	864	
☆ F 8.....	Star	Neat.	.....	23.4	.....	9	14	3	2.01	2.02	2.12	Sq. in.	Pounds.	Pounds.	Pounds.	
		Neat.	.....	23.4	.....	1	.....	.....	2.01	2.06	2.12	4.27	12,500	2,860	2,900	
		Neat.	.....	23.4	.....	1	.....	.....	2.07	2.19	2.08	4.45	11,910	2,676	2,676	
		Neat.	.....	23.4	.....	1	.....	.....	2.04	2.14	2.00	4.26	12,000	2,804	2,804	
		Neat.	.....	23.4	.....	1	.....	.....	2.02	2.20	2.02	4.44	12,750	2,871	2,871	
		Neat.	.....	23.4	.....	1	.....	.....	2.00	2.12	2.05	4.34	12,780	2,945	2,945	
		Neat.	.....	23.4	.....	1	.....	.....	2.00	2.12	2.02	4.26	9,950	2,326	2,724	
		Neat.	.....	23.4	.....	1	.....	.....	2.08	2.00	2.09	4.18	5,400	1,290	1,290	
		Neat.	.....	23.4	.....	1	.....	.....	2.01	2.02	2.12	4.28	5,590	1,310	1,800	
		Neat.	.....	23.4	.....	1	.....	.....	2.02	2.12	2.01	4.26	6,400	1,500	1,500	
S. K. J 28.....	Storm King	Neat.	.....	24.4	.....	9	24	3	2.01	2.02	2.12	Sq. in.	Pounds.	Pounds.	Pounds.	
		Neat.	.....	24.4	.....	1	.....	.....	2.01	2.12	2.01	4.26	6,400	1,270	1,270	
		Neat.	.....	24.4	.....	1	.....	.....	2.00	2.13	2.01	4.28	5,450	1,190	1,190	
		Neat.	.....	24.4	.....	1	.....	.....	2.04	2.06	1.99	4.10	6,290	1,580	1,580	
		Neat.	.....	24.4	.....	1	.....	.....	2.02	2.04	1.94	3.96	5,710	1,440	1,440	
		Neat.	.....	24.4	.....	1	.....	.....	2.01	2.08	2.02	4.20	5,650	1,350	1,350	
		Neat.	.....	24.4	.....	1	.....	.....	2.08	2.08	2.02	4.02	5,000	1,190	1,190	
		Neat.	.....	24.4	.....	1	.....	.....	2.03	2.05	1.96	4.02	5,570	1,390	1,390	
		Neat.	.....	24.4	.....	1	.....	.....	2.08	2.08	2.08	3.90	5,730	1,470	1,870	
		Neat.	.....	24.4	.....	1	.....	.....	2.03	2.08	2.08	3.90	5,730	1,470	1,870	

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH WERE EXPOSED TO 0° F. TEMPERATURE WHILE SETTING, ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperature of—			Dimensions.			Compressive strength.			Remarks.		
		Ce-ment.	Sand.	Water.	Year.	Mo- nth.	Days.	70° F.	Height.	Compressed surface.	Sec- tional area.	Total.	Per square inch.		Mean.	
Aln. F. 6.....	Absen.....	Neat.		P. ct. 28.2	.....	9	16	3	2.05 2.04	2.03 2.01	2.05 1.99	4.16 4.00	7.510 7.100	1.810 1.780	1,800	
		Neat.		28.2	1	.....	1	2.09 2.05	2.04 2.00	2.04 1.99	2.04 1.99	4.16 3.98	6.000 5.750	1.440 1.440	.....	
		Neat.		28.2	1	.....	1	2.09 2.11	2.06 2.08	2.06 2.08	2.06 2.08	4.16 4.18	6.470 7.150	1.560 1.710	.....	
		Neat.		28.2	1	.....	1	2.04 2.01	2.06 2.01	2.06 2.01	2.06 2.01	4.14 4.14	8.050 6.200	1.890 1.500	.....	
		Neat.		28.2	1	.....	1	2.01 2.02	2.03 2.02	2.03 2.02	2.03 2.02	4.18 4.18	7.010 6.720	1.680 1.550	.....	
		Neat.		28.2	1	.....	1	2.11 2.11	2.09 2.09	2.09 2.09	2.09 2.09	4.16 4.16	7.500 6.870	1.780 1.580	.....	
		Neat.		28.2	1	.....	1	1.97	1.99	1.99	1.99	4.14	5.350	1,290	1,680	
		Neat.		27.3	9	7	3	2.04 2.01	2.02 2.03	2.02 2.10	2.02 2.03	4.20 4.26	2.720 2.760	648 648	.....	
		Neat.	Josson.....	27.3	1	.....	1	2.00 2.02	2.06 2.04	2.06 2.07	2.06 2.07	4.18 4.22	3.480 3.760	882 889	.....	
		Neat.		27.3	1	.....	1	2.01 1.99	2.11 2.01	2.11 2.09	2.11 2.09	4.24 4.20	3.760 3.800	781 786	.....	
		Neat.		27.3	1	.....	1	2.06 2.06	2.06 2.02	2.06 2.02	2.06 2.02	4.22 4.14	2.900 3.680	687 889	.....	
		Neat.		36.7	9	16	3	2.05 2.04	2.01 2.02	2.01 2.13	2.01 2.02	4.20 4.80	1,260 1,420	300 380	815	
Aus. F. 6.....	Austin.....	Neat.		36.7	1	.....	1	2.05 2.02	2.09 2.13	2.09 2.08	4.18 4.43	1,310 1,480	313 323	.....		
		Neat.		36.7	1	.....	1	2.02 2.12	2.08 2.19	2.08 2.04	2.08 2.04	4.37 4.47	1,800 1,580	412 365	.....	
		Neat.		36.7	1	.....	1	2.02 2.11	2.07 2.12	2.07 2.12	2.07 2.12	4.39 4.28	1,990 1,400	382 364	.....	
		Neat.		36.7	1	.....	1	2.09 2.08	2.12 2.15	2.12 2.08	2.12 2.15	4.28 4.41	1,320 1,440	308 307	.....	
		Neat.		36.7	1	.....	1	2.08 2.15	2.12 2.06	2.12 2.06	2.12 2.06	4.23 4.18	1,230 1,280	297 291	.....	
		Neat.		36.7	1	.....	1	2.08 2.09	2.15 2.06	2.15 2.06	2.15 2.06	4.18 4.20	1,360 1,360	321 321	883	



DETAILS OF COMPRESSION TESTS OF SPECIMENS EXPOSED TO 39° F. TEMPERATURE WHILE SETTING, AND SUBSEQUENTLY AT 70° F.

[See Report 1901, p. 646, for earlier tests of this series.]

Marks.	Brand of cement.	Composition.			Time of setting in air at temperature of—		Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	39° F.	70° F.	Height.	Compressed sur-face.			Total.	Per square inch.	Mean.	
								Inches.	Sq. inches.					
☆ J 22	Star	Neat.	25.7	1	1	1	2.00	2.08	2.00	4.16	15,400	3,700	Pounds.	
							2.02	2.06	2.00	4.06	15,200	3,990		
							2.04	2.00	2.00	4.00	15,000	4,000		
							2.01	2.01	2.04	4.10	13,700	3,840		
							2.03	2.00	2.00	4.00	15,750	3,840		
							2.01	2.02	2.03	4.10	15,900	3,890		
							2.01	2.03	2.03	4.12	15,800	3,840		
							2.03	2.02	2.04	4.12	25,300	6,260		
							2.00	1.98	2.05	4.06	19,400	4,780		
							2.10	2.02	2.03	4.10	21,200	5,170		
							2.10	1.96	2.01	3.98	21,300	5,350		
							2.01	1.99	2.01	4.00	18,900	4,730		
2.04	2.03	2.00	4.06	19,700	4,850									
2.01	2.03	2.03	4.12	15,000	3,640									
S. K. J 24	Storm King	Neat.	25.0	1	1	2.03	2.05	2.04	4.24	13,800	3,250	Pounds.		
						2.04	2.05	2.04	4.18	12,000	2,870			
						2.02	2.02	2.05	4.14	15,800	3,820			
						1.97	1.97	2.05	4.04	13,300	3,290			
						2.07	1.96	2.05	4.02	18,800	3,430			
						2.03	2.03	2.03	4.22	12,800	3,080			
						2.09	2.03	2.01	4.18	13,400	3,210			
						2.02	2.10	2.10	4.41	14,000	3,170			
						2.09	2.07	2.08	4.31	16,500	3,880			
						2.04	2.10	2.03	4.26	18,900	4,440			
						2.02	2.05	2.09	4.28	18,300	4,280			
						2.05	2.05	2.03	4.22	18,000	4,270			
2.02	2.05	2.04	4.18	20,300	4,860									
Aln. F. 19	Alsen.	Neat.	28.2	1	1	1.91	2.01	2.04	4.10	23,700	5,780	Pounds.		
						1.97	2.02	2.01	4.06	24,700	6,060			
						1.97	2.02	1.99	4.02	25,500	6,560			
						2.00	2.03	1.99	4.10	25,800	7,020			



J. F. 20	Neat	28.2	1	30	1.98	2.01	2.01	4.04	23,300	5,770
					1.98	2.00	1.99	3.96	26,100	6,560
					1.98	2.02	2.02	4.10	26,100	6,120
					1.98	2.00	2.02	4.04	26,500	6,560
J. F. 20	Neat	26.0	1	1	2.00	2.04	2.09	4.26	23,100	5,420
					1.97	2.00	2.02	4.04	20,300	6,020
					1.96	2.06	2.06	4.20	22,200	5,290
					1.95	2.08	1.98	4.12	23,100	5,610
Aus. P. 12	Neat	37.1	1	1	1.99	2.08	2.01	4.18	11,400	2,730
					1.99	2.12	2.00	4.24	11,300	2,670
					2.00	2.09	2.00	4.18	10,700	2,560
					2.00	2.09	2.01	4.20	10,400	2,480
H. J. 25	Neat	38.2	1	30	1.98	2.00	2.00	4.26	10,300	2,890
					1.98	2.13	2.00	4.26	11,280	2,690
					1.96	2.13	2.00	4.26	11,870	2,790
					2.02	2.12	2.00	4.24	8,730	2,060
H. J. 25	Neat	38.2	1	1	2.04	2.08	2.01	4.08	8,800	2,080
					2.04	2.08	2.06	4.28	11,020	2,580
					2.11	2.10	2.03	4.26	9,200	2,160
					2.06	2.07	2.09	4.33	10,280	2,370
H. J. 25	Neat	36.2	1	30	2.08	2.08	2.03	4.26	10,900	2,600
					2.08	2.07	2.03	4.20	9,800	2,320
					2.04	2.08	2.03	4.22	10,600	2,460
					2.04	2.06	2.03	4.18	9,100	2,180
H. J. 25	Neat	36.2	1	30	1.97	2.10	2.06	4.33	11,100	2,560
					2.04	2.12	2.05	4.35	12,950	2,800
					2.05	2.06	2.03	4.22	12,100	2,890
					2.04	2.07	2.03	4.20	12,500	2,980
Norton	Neat	38.2	1	1	2.05	2.06	2.02	4.14	10,400	2,510
					2.05	2.12	2.04	4.32	13,100	3,030
					2.05	2.10	2.10	4.41	11,100	2,920
					2.04	2.07	2.09	4.36	11,300	2,570
Norton	Neat	38.2	1	1	2.08	2.07	2.06	4.24	11,100	2,620
					2.09	2.10	2.08	4.26	10,300	2,420
					2.01	2.08	2.03	4.12	12,700	3,060
					2.10	2.00	2.02	4.04	8,600	2,130
Norton					2.04	2.03	2.13	4.32	11,000	2,550

DETAILS OF COMPRESSION TESTS OF SPECIMENS EXPOSED TO 89° F. TEMPERATURE WHILE SETTING, AND SUBSEQUENTLY AT 70° F.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at tem- perature of—		Dimensions.			Sec- tional area.	Compressive strength.			Remarks.
		Ce- ment.	Sand.	Water.	39° F.	70° F.	Height.	Compressed sur- face.			Total.	Per square inch.	Mean.	
								P. ct.	Year.					
N. J. 21.....	Norton.....	Neat.....	.....	38.2	1	30	2.02	2.07	2.01	4.16	9,980	2,250	.....	.....
							2.11	2.02	2.02	4.06	9,150	2,240	.....	
							2.02	2.00	2.02	4.04	8,400	2,080	.....	
							2.02	2.02	2.02	4.06	10,810	2,660	2,810	
							.....	.....	.....	.....	.....	.....	.....	
O. F. 16.....	Obellak.....	Neat.....	.....	36.2	1	1	1.99	2.04	2.00	4.06	9,900	2,480	.....	.....
							1.99	2.01	1.96	3.94	10,700	2,720	.....	
							1.99	2.06	2.00	4.10	13,800	3,370	.....	
							2.02	2.03	1.98	3.92	8,100	2,070	.....	
							1.91	2.01	2.02	4.06	8,200	2,020	.....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	
.....	.....	.....	.....	.....	.....	.....	2.02	2.01	1.98	3.88	9,600	2,460	.....	.....
.....	.....	.....	.....	.....	.....	.....	2.01	1.99	4.00	12,900	3,200	2,610	.....	
.....	.....	.....	.....	.....	.....	.....	2.02	2.02	3.90	9,700	2,490	.....	.....	
.....	.....	.....	.....	.....	1	30	1.99	2.00	1.96	3.90	10,100	2,660	.....	.....
.....	.....	.....	.....	.....	.....	.....	1.99	2.02	4.24	10,020	2,360	.....	.....	
.....	.....	.....	.....	.....	.....	.....	1.99	2.04	4.12	12,680	3,070	.....	.....	
.....	.....	.....	.....	.....	.....	.....	1.96	2.03	4.04	10,600	2,600	.....	.....	
.....	.....	.....	.....	.....	.....	.....	2.02	2.02	4.04	11,600	2,860	.....	.....	
.....	.....	.....	.....	.....	.....	.....	1.99	2.03	4.02	11,600	2,860	2,690	.....	

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., AND FOLLOWED BY ONE DAY AT 70° F., WITH CUBES OF SAME COMPOSITION WHICH AGED IN AIR AT 70° F. ONLY, CORRESPONDING INTERVALS OF TIME.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.			Total.	Per square inch.	Mean.	
									Inches.	Inches.					
Alp. F. 30.....	Alpha .....	Neat.	25.0	1				1.99	2.01	2.01	1.99	19,700	4,900	4,900	
								2.05	2.00	2.00	1.92	20,200	5,400	5,400	
								2.00	1.99	2.05	2.00	21,500	5,240	5,240	
								2.00	1.99	2.01	1.99	20,780	5,300	5,300	
								2.06	2.00	2.00	1.98	16,200	4,110	4,990	
								1.96	2.02	2.01	2.06	8,900	2,290	2,290	
								2.03	1.95	2.02	2.04	8,960	2,270	2,270	
								2.00	2.00	1.97	2.01	9,260	2,350	2,350	
								1.99	2.00	1.97	1.96	10,290	2,510	2,510	
								1.98	1.96	1.97	2.02	9,900	2,460	2,400	
								2.00	1.96	2.00	2.00	27,700	6,990	6,990	
								2.02	2.00	2.03	2.02	27,800	6,990	6,970	
2.00	1.99	2.08	2.00	28,100	5,720	5,720									
2.00	1.99	2.00	2.00	21,300	5,350	6,320									
1.92	2.00	2.01	1.92	9,900	2,460	2,460									
2.00	2.00	1.99	2.00	12,600	3,170	3,170									
2.02	1.99	1.99	2.02	10,200	2,590	2,590									
2.00	2.00	2.07	2.00	11,600	2,900	2,900									
2.00	2.00	1.98	2.00	13,900	3,510	2,900									
2.08	2.03	2.00	2.08	24,900	6,130	6,130									
1.99	1.96	2.00	1.99	20,900	5,260	5,260									
2.00	2.01	1.99	2.00	22,300	5,360	5,360									
2.00	1.99	2.01	2.00	21,900	5,460	5,460									
2.00	1.99	2.01	2.00	18,600	4,700	5,480									

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Mean.	
Alp. F. 20.....	Alpha.....	Neat.		Per ct. 25.0	Days 1	Days 91	Days 1	Inches 1.99	Inches 2.00	Sq. ins. 3.96	Pounds 13,000	Pounds 3,280	.....	
								1.99	2.03	4.10	16,900	4,120	.....	
								1.98	2.05	4.10	14,900	3,680	.....	
								2.03	2.01	4.02	12,300	3,060	.....	
								2.02	2.06	4.10	15,600	3,800	3,580	
								2.07	1.94	3.78	17,000	4,500	.....	
								2.01	2.05	4.10	25,900	6,820	.....	
								2.00	1.99	4.02	28,500	7,090	.....	
								1.91	2.03	4.06	27,700	5,690	.....	
								1.99	2.00	3.98	24,000	6,080	5,910	
Alp. M. 8.....	Alpha.....	Neat.		25.0	Days 1	Days 179	Days 1	2.00	2.03	4.04	15,600	3,860	.....	
								1.96	2.08	4.04	14,100	3,490	.....	
								2.02	2.02	4.00	14,500	3,630	.....	
								1.99	2.00	4.00	15,400	3,850	.....	
								2.01	2.00	3.96	18,900	3,510	3,670	
								2.05	1.99	3.96	16,800	4,240	.....	
								2.03	2.00	3.98	17,850	4,460	.....	
								2.00	2.01	4.08	17,200	4,220	.....	
								2.03	2.00	4.02	20,600	5,120	.....	
								2.00	2.02	4.04	17,200	4,260	4,460	
Alp. M. 8.....	Alpha.....	Neat.		23.0	Days 4	Days 12	Days 12	2.07	1.97	3.96	17,900-	4,520	.....	
								1.99	2.01	4.14	19,400	4,690	.....	
								2.00	2.01	4.02	20,700	5,190	.....	
								2.00	1.98	3.88	21,800	5,490	.....	
								1.96	2.03	4.02	16,500	3,860	4,740	
								2.00	2.01	4.02	18,600	4,590	.....	
								1.99	2.01	4.06	19,100	4,570	.....	
								1.98	2.01	4.14	19,200	4,440	.....	
								2.01	1.99	3.96	21,200	5,850	.....	
								2.01	1.99	4.08	17,500	4,290	4,720	

Neat.	23.0	34	2.08	2.00	1.98	3.86	19,600	5,090
.....	.....	.....	2.00	1.97	2.09	4.12	21,700	5,270
.....	.....	.....	2.00	2.01	2.04	4.10	25,300	5,170
.....	.....	.....	2.00	2.05	1.99	4.08	26,300	6,450
.....	.....	.....	1.97	2.00	1.99	3.98	18,700	4,700
.....	.....	.....	.....	.....	.....	.....	.....	5,580
Neat.	23.0	4	2.01	2.03	2.00	4.06	21,500	5,300
.....	.....	29	1.96	1.97	1.97	3.94	23,700	6,020
.....	.....	.....	1.97	2.00	1.99	3.98	19,700	4,960
.....	.....	.....	1.99	2.02	1.98	4.00	19,700	4,880
.....	.....	.....	2.04	1.99	2.02	4.02	19,600	4,880
.....	.....	.....	.....	.....	.....	.....	.....	5,220
Neat.	23.0	98	1.99	2.00	1.98	3.96	26,100	6,560
.....	.....	.....	1.96	1.99	2.03	4.04	24,900	6,160
.....	.....	.....	1.99	2.04	2.00	4.08	26,500	6,760
.....	.....	.....	1.99	2.02	1.95	3.94	20,700	5,250
.....	.....	.....	2.00	1.99	2.02	4.02	19,500	4,850
.....	.....	.....	.....	.....	.....	.....	.....	6,720
Neat.	23.0	4	1.96	1.97	2.02	3.98	22,900	5,750
.....	.....	93	2.02	1.96	2.00	3.92	21,600	5,510
.....	.....	.....	2.00	1.99	1.98	3.94	22,000	5,560
.....	.....	.....	1.99	1.96	2.03	4.02	24,800	6,170
.....	.....	.....	1.99	1.99	2.02	4.02	22,500	5,720
.....	.....	.....	.....	.....	.....	.....	.....	5,720
Neat.	23.0	188	2.04	1.92	2.00	3.94	16,600	4,820
.....	.....	.....	2.06	1.94	1.99	3.86	19,200	4,970
.....	.....	.....	2.02	2.01	2.01	4.04	24,100	5,970
.....	.....	.....	2.00	2.00	2.04	4.08	26,500	6,500
.....	.....	.....	2.02	2.01	2.02	4.06	22,300	5,450
.....	.....	.....	.....	.....	.....	.....	.....	5,450
Neat.	23.0	4	1.99	2.05	2.00	4.10	19,600	4,790
.....	.....	183	2.00	2.05	2.01	4.12	22,300	5,410
.....	.....	.....	2.04	2.00	1.99	3.98	23,000	5,790
.....	.....	.....	2.04	2.01	2.00	4.02	23,000	5,720
.....	.....	.....	2.05	2.00	2.01	4.02	21,500	5,350
.....	.....	.....	.....	.....	.....	.....	.....	5,410
Neat.	23.0	7	2.04	2.00	2.03	4.06	22,800	5,620
.....	.....	.....	2.05	2.00	2.03	4.06	22,900	5,670
.....	.....	.....	2.05	1.98	2.07	4.06	24,700	6,040
.....	.....	.....	2.05	2.02	2.01	4.05	24,100	6,040
.....	.....	.....	2.01	2.03	2.03	4.12	19,100	4,640
.....	.....	.....	.....	.....	.....	.....	.....	5,560
Neat.	23.0	17	1.98	1.99	2.08	4.14	21,400	5,170
.....	.....	.....	1.97	2.02	2.02	4.04	22,300	5,520
.....	.....	.....	2.01	1.97	2.08	4.00	27,100	6,790
.....	.....	.....	2.00	1.98	1.98	3.92	21,800	5,560
.....	.....	.....	1.98	2.03	2.00	4.05	22,800	5,620
.....	.....	.....	.....	.....	.....	.....	.....	5,730
Neat.	23.0	7	2.03	2.02	1.96	3.96	17,100	4,820
.....	.....	9	2.04	1.97	2.03	4.00	23,900	5,990
.....	.....	.....	2.04	2.04	2.00	4.08	20,900	5,120
.....	.....	.....	2.01	2.02	1.99	4.02	21,100	5,250
.....	.....	.....	2.01	2.02	1.99	3.98	20,500	5,160
.....	.....	.....	2.01	2.00	1.99	3.98	20,500	5,160

Alp. A. 26 ..... Alpha

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 9° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec-tional area.	Compressive strength.			Remarks.	
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Mean.		
															Per ct.
Alp. A. 26.....	Alpha.....	Neat.		28.0		88			2.00	1.95	2.04	3.86	17,460	4,520	
								2.08	2.02	4.10	2.02	2.06	28,980	5,940	
								2.02	2.06	3.82	1.97	2.04	17,800	4,860	
								2.01	1.94	3.82	1.94	2.04	14,800	3,740	
								2.09	1.96	3.96	1.97	2.04	18,900	4,760	4,650
								2.02	1.97	4.02	2.04	2.04	15,400	3,850	
								2.06	2.02	4.06	2.02	2.06	18,500	4,860	
								1.89	2.01	3.96	2.02	2.06	19,780	5,000	
								2.04	2.01	4.12	2.05	2.06	20,200	4,800	
								1.94	1.97	4.04	2.05	2.06	17,700	4,880	4,580
								2.05	1.95	3.92	2.00	2.04	21,000	5,360	
								2.08	1.97	4.06	2.07	2.06	21,100	5,170	
						2.08	1.96	4.06	2.05	2.06	19,500	4,800			
						2.03	1.98	4.10	2.07	2.06	20,800	5,070			
						2.04	1.97	3.80	1.98	2.04	20,700	5,460	5,170		
						2.04	2.04	4.10	2.01	2.04	17,200	4,200			
						2.05	1.96	4.10	2.09	2.06	20,900	5,100			
						2.02	1.97	4.06	2.06	2.04	22,300	5,490			
						2.02	2.03	4.14	2.04	2.04	20,800	4,900			
						2.02	2.00	4.06	2.04	2.04	25,100	6,150	5,170		
						2.06	2.06	4.08	2.06	2.06	23,600	5,780			
						1.85	2.01	4.10	1.98	2.06	22,500	5,480			
						2.03	2.00	4.00	1.99	2.00	25,200	6,300			
						2.05	2.02	4.04	2.00	2.00	25,300	6,360			
						2.05	2.02	4.04	2.00	2.00	23,800	5,770	5,940		
						2.09	2.07	4.14	2.00	2.00	21,200	5,120			
						2.03	2.02	4.06	2.02	2.02	22,000	5,360			
						2.01	2.03	4.08	2.01	2.01	21,800	5,220			
						2.01	2.03	4.10	2.02	2.02	22,500	5,490			
						2.01	2.00	4.02	2.01	2.01	22,300	5,550	5,850		

Neat.	24.0	1								2.08	2.02	2.01	4.06	2,790	673
										1.99	2.02	2.00	4.04	2,650	666
										1.99	2.01	2.00	4.02	2,940	722
										2.06	2.04	2.02	4.12	2,770	672
										2.00	2.00	1.99	4.00	2,860	723
Neat.	24.0	9								2.02	2.04	2.00	4.08	15,400	3,770
										2.01	2.01	1.96	3.94	12,660	3,040
										2.02	2.01	2.02	4.06	16,900	4,040
										2.01	2.01	2.00	4.12	17,300	4,040
										2.01	2.01	2.00	4.02	16,060	3,990
Neat.	24.0	1	7	1						2.05	2.02	1.99	4.02	8,750	2,180
										2.01	2.02	2.00	4.14	9,000	2,170
										2.01	2.02	2.01	4.08	8,700	2,180
										2.01	2.03	2.00	4.06	10,300	2,540
										2.06	2.01	2.00	4.02	6,700	1,670
Neat.	24.0	83								2.00	1.96	1.98	3.94	18,800	4,770
										2.04	2.00	1.96	3.96	18,700	4,730
										2.01	2.08	1.98	4.02	19,400	4,880
										2.04	2.04	1.98	4.04	23,200	5,740
Neat.	24.0	1	81	1						2.04	2.02	2.02	4.08	12,200	2,980
										2.02	2.02	2.02	4.06	7,700	1,860
										2.04	2.01	2.04	4.10	11,100	2,710
										2.01	2.02	2.01	4.06	10,400	2,560
										2.00	2.01	1.96	3.94	10,300	2,610
Neat.	24.0	96								1.96	2.00	1.92	3.84	23,160	6,080
										2.04	2.00	2.01	4.02	21,410	5,880
										1.99	2.02	2.00	4.04	23,070	5,710
										2.00	2.08	2.00	4.06	21,690	5,840
										2.04	2.01	1.99	4.00	21,550	5,860
Neat.	24.0	1	94	1						2.00	2.01	1.98	3.96	11,600	2,910
										1.96	2.01	1.99	4.00	11,260	2,820
										1.99	2.08	2.08	4.12	10,700	2,600
										1.99	2.01	2.01	4.04	10,800	2,670
										1.97	2.08	2.01	4.08	11,720	2,870
Neat.	24.0	183								2.01	2.01	2.08	4.08	20,600	5,050
										2.00	2.00	2.01	4.02	21,000	5,220
										2.01	2.04	1.99	4.06	23,200	5,710
										2.00	2.06	2.00	4.10	24,300	6,980
										2.00	2.02	2.08	4.10	21,100	5,410
Neat.	24.0	1	181	1						2.00	2.04	2.02	4.12	11,700	2,840
										2.01	2.00	2.01	4.02	13,000	3,280
										2.03	2.00	2.04	4.06	11,000	2,700
										2.04	1.99	2.08	4.04	10,300	2,660
										2.00	2.01	2.02	4.06	13,900	3,420

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Mean.	
				Per ct.	Days.	Days.	Days.	Inches.	Inches.	Sq. ins.	Pounds.	Pounds.	Pounds.	
Atl. M. 18.....	Atlas.....	Neat.		23.5	4			2.02	2.00	3.94	12,200	3,100		
								2.04	2.04	1.97	8,700	3,880		
								2.00	2.02	4.06	18,600	3,960		
								2.01	2.03	4.14	18,910	3,960		
								2.01	2.06	1.99	14,600	3,580		
								2.01	2.02	4.14	12,200	2,960	3,270	
		Neat.		23.5	12			2.00	2.02	2.07	16,800	3,900		
								2.03	2.08	4.18	16,900	4,120		
								2.03	2.08	4.10	16,250	4,450		
								2.06	2.02	3.82	16,050	4,050		
								2.00	2.04	4.06	18,800	4,610	4,280	
		Neat.		23.5	4	7	1	2.03	2.04	4.14	14,800	3,570		
								1.94	2.05	4.04	13,500	3,270		
								2.01	2.05	4.07	13,500	3,780		
								1.94	2.06	4.04	14,900	3,680		
								1.96	2.04	4.04	15,200	3,760	3,680	
		Neat.		23.5	37			1.97	2.02	3.98	17,700	4,450		
								1.96	2.02	4.12	20,500	4,980		
								1.98	2.03	4.10	19,800	4,880		
								1.96	2.02	4.14	16,900	4,080		
								1.96	2.02	4.04	16,600	4,110	4,490	
		Neat.		23.5	4	32	1	2.00	2.05	4.06	14,700	3,620		
								2.00	2.02	4.04	12,600	3,130		
								2.00	2.04	4.12	17,000	4,180		
								2.00	2.05	4.12	13,000	3,160		
								1.96	2.06	4.06	13,300	3,260	3,458	
		Neat.		23.5	96			1.99	2.05	4.06	23,400	5,740		
								1.98	2.06	4.18	23,200	5,550		
								2.03	2.06	1.91	21,900	5,780		
								2.00	2.05	1.96	22,000	5,470		
								2.04	2.03	4.02	22,300	5,550	5,610	



Neat.	23.5	4	91	1	2.02	2.04	2.00	4.08	17,600	4,810
					2.01	2.02	2.00	4.04	17,970	4,480
					1.97	2.04	2.00	4.06	17,000	4,190
					2.01	2.05	2.01	4.12	17,600	4,270
					2.00	2.04	2.01	4.10	16,200	4,180
Neat.	23.5	190			1.99	1.98	2.04	4.04	20,600	5,100
					2.00	2.01	2.02	4.06	22,500	5,540
					2.02	1.98	2.00	3.86	17,000	4,400
					2.01	2.00	2.08	4.06	19,800	4,750
					2.00	2.04	2.04	4.16	22,500	5,040
Neat.	23.5	4	186	1	2.00	2.02	2.05	4.14	16,100	3,890
					2.00	2.01	2.06	4.14	16,300	3,940
					2.01	2.00	2.05	4.10	14,900	3,680
					2.00	2.06	2.01	4.14	17,600	4,290
					2.04	1.99	2.04	4.06	16,800	4,140
Neat.	24.0	7			2.00	2.05	2.04	4.18	15,700	3,780
					2.01	2.02	2.00	4.04	16,560	4,100
					2.06	2.02	2.04	3.92	14,460	3,690
					2.00	2.06	2.02	4.16	13,500	3,520
					1.97	2.02	2.04	4.12	13,500	3,780
Neat.	24.0	15			2.02	2.04	2.02	4.12	19,700	4,790
					1.99	2.00	1.97	3.94	19,500	4,820
					2.00	2.05	2.01	3.92	20,200	4,800
					2.01	2.03	2.00	4.06	19,800	4,800
					1.98	2.07	1.99	4.12	20,400	4,860
Neat.	24.0	7	7	1	2.00	1.99	2.00	3.98	17,100	4,300
					1.99	1.99	2.03	4.04	16,600	4,110
					1.99	2.04	2.00	4.08	17,700	4,340
					1.99	2.03	1.98	4.02	15,700	3,910
					1.99	2.03	1.92	3.90	17,100	4,380
Neat.	24.0	38			2.00	2.01	1.99	4.00	23,200	5,550
					2.00	2.04	1.98	4.04	19,300	4,780
					2.04	2.04	1.99	4.06	22,900	5,640
					1.97	2.02	2.05	4.14	19,700	4,760
					1.99	1.99	2.00	3.98	19,100	4,800
Neat.	24.0	7	30	1	2.03	2.04	1.99	4.06	16,900	4,160
					1.99	2.00	1.98	3.96	15,900	4,020
					2.09	2.03	1.99	4.04	17,100	4,230
					1.99	2.03	1.99	4.04	13,800	3,290
					1.96	2.04	1.98	4.04	14,600	3,610
Neat.	24.0	97			2.01	2.05	2.02	4.14	26,200	6,330
					2.01	2.05	1.96	4.06	23,720	5,840
					2.00	2.03	1.99	4.04	23,400	5,780
					2.01	2.04	2.08	4.24	26,200	6,180
					1.99	2.01	2.02	4.06	22,300	5,490

Atl. M. 12 ..... Atlas

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 60° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec- tional area.	Compressive strength.			Remarks.
		Ce- ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Mean.	
A.H. M. 12.....	Atlas.....	Neat.		Per ct. 24.0	Days 7	Days 89	Days 1	Inches. 2.08	Inches. 2.03	Sq. inc. 4.06	Pounds. 19,000	Pounds. 4,680	Pounds. .....	
								1.97	2.02	3.98	17,500	4,400	.....	
								2.01	2.06	4.04	16,400	4,060	.....	
								2.02	2.03	4.06	18,800	4,490	.....	
								2.02	1.98	4.02	17,900	4,450	4,420	
								1.96	1.98	4.10	21,200	5,170	.....	
								2.00	2.05	4.14	23,100	5,580	.....	
								2.01	2.02	4.06	24,100	5,910	.....	
								1.99	2.01	4.06	24,800	6,110	.....	
								1.97	2.00	4.02	24,900	6,190	5,790	
☆ F. 14.....	Star, with plaster.....	Neat.		24.0	7	184	1	1.92	2.02	4.04	17,300	4,280	.....	
								1.97	1.99	4.06	18,400	4,510	.....	
								2.00	2.04	4.08	17,300	4,240	.....	
								2.00	2.02	4.08	20,200	4,950	.....	
								2.05	1.96	3.98	17,900	4,500	4,500	
								2.03	2.00	3.98	8,760	942	.....	
								2.04	2.05	4.10	4,870	1,070	.....	
								2.01	2.03	4.04	4,980	1,230	.....	
								2.03	2.06	3.98	4,10	4,420	1,060	.....
								2.01	2.00	3.98	4,470	1,120	1,090	
		Neat.		27.0	11			2.03	2.03	4.06	15,800	3,770	.....	
								2.03	2.04	4.06	19,900	4,900	.....	
								2.04	2.00	4.00	17,000	4,250	.....	
								2.06	1.96	4.13	19,800	4,790	.....	
								2.03	2.01	4.06	17,560	4,320	4,410	
								2.00	2.03	4.02	12,600	3,180	.....	
								2.03	1.95	4.10	11,400	2,780	.....	
								2.02	1.92	3.94	10,800	2,470	.....	
								2.03	1.94	3.94	10,800	2,470	.....	
								2.02	1.99	4.00	9,000	2,350	2,680	

Neat.	27.0	38				2.02	2.01	2.05	4.10	23,300	5,680
						2.04	2.01	2.00	4.02	19,300	4,800
						1.99	2.01	2.00	4.02	19,900	4,850
						2.01	2.01	2.05	4.12	23,900	5,800
						2.01	1.97	2.03	4.00	21,950	5,490
Neat.	27.0	1	31	1		1.94	1.96	2.05	4.05	15,300	3,750
						2.01	2.06	2.07	4.25	15,200	3,670
						2.01	2.08	2.01	4.15	13,900	3,330
						2.01	2.00	2.01	4.02	11,400	2,840
						2.00	2.02	2.01	4.05	13,300	3,280
Neat.	27.0	91				2.02	1.97	2.16	4.25	23,900	5,610
						2.02	2.01	2.05	4.14	26,200	6,330
						2.08	1.97	2.04	4.02	20,500	5,100
						2.01	1.98	2.02	4.00	21,700	5,430
						2.08	1.97	2.02	3.95	22,600	5,680
Neat.	27.0	1	89	1		1.99	2.02	2.05	4.15	12,900	3,100
						2.02	2.04	2.05	4.14	14,900	3,600
						2.00	2.03	1.99	4.04	15,100	3,740
						2.02	2.00	2.04	4.05	13,100	3,210
Neat.	27.0	137				2.01	2.12	1.99	4.20	27,200	6,490
						2.00	2.02	2.01	4.05	20,680	5,090
						1.98	2.04	2.00	4.05	22,300	5,470
						1.99	2.01	2.01	4.04	25,200	6,240
						2.01	2.05	1.98	4.05	17,100	4,210
Neat.	27.0	1	135	1		2.02	2.04	2.09	4.05	15,500	3,800
						2.01	2.00	1.97	3.94	17,700	4,490
						2.00	2.10	2.00	4.20	15,200	3,620
						2.04	2.01	2.05	4.05	16,800	4,120
						2.00	2.05	2.01	4.14	17,950	4,340
Neat.	25.0	10				2.02	2.05	2.01	4.05	20,650	5,060
						2.00	2.05	2.01	4.05	22,100	5,420
						2.00	2.05	2.01	4.05	21,200	5,200
						1.95	2.01	2.01	4.04	19,400	4,800
						2.02	2.05	2.01	4.05	19,000	4,660
Neat.	25.0	2	7	1		2.04	2.00	2.02	4.04	12,600	3,120
						2.02	2.05	2.01	4.00	17,200	4,310
						2.01	2.04	2.01	4.12	15,800	4,540
						2.01	2.04	2.05	4.14	18,750	4,530
						2.02	1.97	2.07	4.05	19,010	4,660
Neat.	25.0	33				2.00	2.05	1.99	4.04	25,500	6,560
						2.03	2.00	2.02	4.04	22,000	5,450
						2.04	2.01	1.98	3.98	19,400	4,870
						1.96	2.02	2.04	4.12	25,300	6,140
						1.99	2.02	2.05	4.14	21,900	5,230

☆ P. 15.....Star, with plaster...

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.	
		Cement.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Inches.	Inches.		Sq. ins.	Total.	Per square inch.		Mean.
☆ F. 15.....	Star, with plaster...	Neat.	25.0	Per c.	2	30	1	1.99	2.03	4.06	15,300	8,770	4,110	.....		
								2.04	2.00	4.10	16,600	4,050				
								2.04	2.08	4.10	14,700	3,580				
								2.02	2.02	4.06	18,000	4,480				
								2.02	2.04	4.06	19,200	4,780				
								1.99	2.00	4.04	28,100	6,960				
								2.04	1.98	3.92	23,200	5,920				
								1.98	2.06	4.10	24,200	5,900				
								2.02	2.04	4.20	24,900	5,980				
								2.01	2.02	4.04	23,000	5,680				
								2.00	2.02	4.10	20,200	4,980				
								1.98	2.03	4.08	24,200	5,960				
2.03	2.04	4.08	21,500	5,840												
2.03	2.02	4.08	20,100	4,980												
2.06	2.00	4.10	19,200	4,680												
2.06	2.01	4.04	25,800	6,800												
1.98	2.00	3.98	23,500	5,780												
1.98	2.00	4.00	23,000	5,700												
1.99	2.01	4.00	23,700	5,780												
2.00	2.01	4.10	21,700	5,400												
2.03	2.00	4.06	21,800	5,870												
2.01	2.02	4.08	24,100	5,940												
2.02	2.02	4.10	22,600	5,510												
2.03	2.06	4.10	21,900	5,840												
2.03	1.98	4.00	22,100	5,580												
2.01	2.02	4.02	19,000	4,780												
2.00	2.04	4.10	20,900	5,100												
2.03	2.04	4.10	20,400	4,980												
2.01	2.01	4.08	20,980	5,140												
1.99	2.01	4.12	21,600	5,240												
☆ M. 6.....	Star, with plaster...	Neat.	25.0	4	.....	.....	.....	2.01	2.02	4.02	19,000	4,780	.....			
								2.00	2.04	4.10	20,900	5,100				
								2.03	2.04	4.10	20,400	4,980				
								2.01	2.01	4.08	20,980	5,140				
								1.99	2.01	4.12	21,600	5,240				

Neat.	25.0	12			2.01	2.08	2.00	4.06	22,900	5,640
					2.06	2.08	2.00	4.06	25,600	6,310
					2.01	1.99	2.03	4.04	22,800	5,640
					2.01	2.01	2.00	4.02	23,100	5,760
					2.07	2.00	1.96	3.90	21,700	5,660
Neat.	25.0	4	7	1	2.01	2.04	2.02	4.12	20,300	4,980
					2.02	2.01	1.99	4.00	23,900	5,960
					1.99	2.02	2.05	4.14	25,900	6,260
					1.99	2.06	2.02	4.16	24,400	5,870
					1.97	2.01	2.01	4.04	20,500	5,070
Neat.	25.0	86			1.99	1.99	2.02	4.02	24,900	6,190
					2.01	2.02	2.04	4.12	24,600	7,140
					2.04	2.00	2.03	4.06	27,600	6,800
					2.06	2.02	2.01	4.06	27,000	6,820
					1.96	2.02	2.03	4.10	21,900	5,840
Neat.	25.0	4	31	1	2.03	2.01	2.01	4.04	18,900	4,680
					2.04	2.01	1.99	4.06	21,000	5,150
					1.96	2.01	1.99	4.00	19,700	4,880
					1.98	2.01	1.99	4.00	19,700	4,880
					2.01	2.03	2.01	4.06	23,000	5,640
Neat.	25.0	100			2.05	2.00	2.00	4.00	25,200	6,300
					2.06	2.00	2.03	4.06	23,900	7,370
					1.99	2.04	1.98	4.04	28,400	7,080
					1.99	2.04	2.01	4.10	21,700	5,290
					2.01	2.01	2.01	4.04	24,300	6,400
Neat.	25.0	4	96	1	1.99	2.01	2.05	4.12	22,200	5,390
					2.02	2.02	2.01	4.06	27,750	6,840
					1.99	2.02	2.04	4.12	23,900	5,800
					2.02	1.98	2.04	3.94	22,300	5,660
					2.02	2.09	2.00	4.18	24,800	5,920
Neat.	25.0	190			2.00	2.04	2.06	4.20	29,050	6,920
					2.00	2.02	2.03	4.10	26,300	6,410
					2.06	2.02	2.00	4.04	29,200	7,280
					2.01	2.02	2.00	4.04	28,700	7,100
					1.99	2.06	2.00	4.12	26,200	6,360
Neat.	25.0	4	185	1	1.99	1.99	2.01	4.00	25,400	6,350
					2.01	2.00	1.98	3.96	25,400	6,410
					2.00	2.00	2.02	4.04	26,100	6,210
					2.01	2.01	2.02	4.06	23,400	5,760
					2.02	2.01	2.01	4.04	26,800	6,680
Neat.	24.5	7			1.91	2.01	2.03	4.06	17,900	4,390
					2.02	2.01	1.98	3.98	16,800	4,250
					2.02	2.03	2.02	4.10	19,800	4,860
					1.99	2.04	2.00	4.06	20,260	4,970
					2.06	2.03	2.00	4.06	20,500	4,710

☆ M. 14..... Star, with plaster

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Meant.	
☆ M. 14.....	Star, with plaster ..	Neat.	.....	Per cent. 24.5	Days. 15	Days.	Days.	Inches.	Inches.	Sq. ins.	Pounds.	Pounds.	Pounds.	
											2,600	24,500	3,910	
											1.97	1.96	3.98	
											2.02	2.01	4.02	
											2.00	2.04	4.08	
											1.98	2.04	4.02	
											1.96	2.08	4.02	
											1.96	2.04	3.98	
											2.00	2.04	4.08	
											2.02	2.01	4.02	
											2.04	2.00	3.98	
											2.04	2.00	4.02	
.....	.....	Neat.	.....	24.5	42	.....	.....	.....	.....	.....	Pounds.	Pounds.	Pounds.	
											2,040	18,400	2,850	
											1.97	1.99	3.98	
											1.97	2.02	4.10	
											1.97	2.01	3.98	
											1.94	2.08	4.14	
											1.98	1.99	4.06	
											2.04	1.99	4.01	
											1.97	2.02	4.10	
											1.97	2.01	3.98	
											1.94	2.08	4.14	
											2.04	2.08	4.18	
.....	.....	Neat.	.....	24.5	7	34	.....	.....	.....	.....	Pounds.	Pounds.	Pounds.	
											2,000	15,900	2,580	
											1.99	2.00	3.96	
											1.96	1.98	4.12	
											2.08	2.02	4.00	
											2.04	2.08	4.06	
											2.08	2.00	3.98	
											1.99	2.02	4.04	
											2.02	2.02	4.10	
											2.01	2.01	4.04	
											1.97	2.08	4.10	
											2.08	2.01	3.96	
.....	.....	Neat.	.....	24.5	7	87	.....	.....	.....	.....	Pounds.	Pounds.	Pounds.	
											2,080	16,450	2,780	
											2.02	2.04	4.06	
											2.04	1.99	4.08	
											2.00	2.06	4.12	
											1.90	2.00	4.04	
											2.08	2.08	4.00	
											2.02	2.01	4.06	
											2.04	1.99	4.08	
											2.00	2.06	4.12	
											1.90	2.00	4.04	
											2.08	2.01	3.96	

Neat.	24.5	189				2.08	2.02	2.02	4.08	22,100	5,420
						1.94	2.04	2.04	4.08	22,600	5,570
						2.02	2.01	2.01	3.98	22,900	5,750
						1.98	2.04	2.04	4.08	21,800	7,830
						1.98	2.01	2.01	4.02	28,700	6,340
Neat.	24.5	7	182	1		2.02	2.04	2.04	4.08	26,100	6,150
						1.96	2.01	2.01	4.02	26,700	6,390
						2.01	2.02	2.02	4.00	21,200	5,800
						2.04	2.04	2.04	3.92	22,000	6,610
						2.00	2.05	2.05	4.12	22,600	5,790
Neat.	24.0	a1	7	1		2.08	2.01	2.08	4.08	6,400	1,830
						2.03	2.04	2.04	4.18	5,500	1,820
						2.08	2.00	2.00	4.04	5,350	1,830
						1.98	1.97	1.97	4.00	4,890	1,220
						2.00	2.03	2.01	4.08	5,020	1,230
Neat.	24.0	a1	29	1		2.01	2.00	2.00	4.00	4,700	1,175
						2.01	2.01	1.97	3.96	5,390	1,361
						2.01	2.08	2.08	4.12	6,050	1,468
						2.01	2.02	2.00	4.04	5,270	1,304
						2.01	2.04	1.96	4.00	4,290	1,073
Neat.	24.0	a1	92	1		2.00	2.05	2.01	4.12	7,900	1,920
						2.01	1.99	2.08	4.04	7,850	1,940
						2.07	2.00	2.02	4.04	7,790	1,890
						2.02	2.00	2.02	4.04	5,800	1,440
						2.07	2.06	1.96	4.08	7,400	1,810
Neat.	24.0	a1	180	1		2.04	2.05	2.02	4.14	6,900	1,640
						2.00	2.02	2.06	4.16	7,600	1,900
						2.08	2.06	2.04	4.20	6,660	1,890
						2.10	2.00	2.01	4.02	6,080	1,510
						2.07	2.04	2.06	4.20	8,200	1,950
Neat.	29.5	1				1.92	2.01	2.02	4.06	1,470	392
						2.00	2.00	2.08	4.06	1,450	397
						1.97	2.00	2.02	4.04	1,510	324
						1.96	2.03	2.01	4.06	1,270	311
Neat.	29.5	9				1.96	1.99	2.00	3.98	13,150	3,300
						2.01	2.00	2.00	4.10	12,300	3,020
						1.99	2.03	1.98	4.10	15,700	3,640
						1.97	2.02	1.98	3.96	11,700	2,790
						2.04	2.00	1.97	3.94	11,000	2,790

At 29° to 26° F.

This lot exposed weather 20° F. 11 after molding ranged from 30 to 26° F. the first Put in freezer at F. the next day.

Do.

Do.

Do.

Defective corner.

Do.

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F. Days	0° F. Days	70° F. Days	Height.	Compressed surface.			Total.	Per square inch.	Mean.	
									Inches.	Inches.					
☆F. 17.....	Star, without plaster	Neat.	.....	29.5	1	7	1	2.02	2.01	2.01	4.04	6,720	1,420	.....	
		.....	.....	.....	.....	.....	.....	1.98	2.01	1.95	3.92	5,300	1,350	.....	
		.....	.....	.....	.....	.....	.....	1.98	2.00	1.97	3.94	5,200	1,320	.....	
		.....	.....	.....	.....	.....	.....	1.99	2.02	1.98	4.00	6,410	1,600	.....	
		.....	.....	.....	.....	.....	.....	1.98	2.00	1.99	3.98	5,280	1,380	1,400	
		Neat.	.....	29.5	32	.....	.....	2.05	2.00	1.98	3.96	17,100	4,320	.....	
		.....	.....	.....	.....	.....	.....	1.96	2.01	1.99	4.00	20,900	5,230	.....	
		.....	.....	.....	.....	.....	.....	1.98	2.03	1.98	4.02	15,920	3,960	4,500	
		Neat.	.....	29.5	1	30	1	2.06	2.02	1.92	3.88	7,400	1,910	.....	
		.....	.....	.....	.....	.....	.....	2.06	2.02	1.93	3.90	6,250	1,600	.....	
		.....	.....	.....	.....	.....	.....	2.00	2.04	2.00	4.08	7,200	1,760	.....	
		.....	.....	.....	.....	.....	.....	2.05	2.03	1.99	4.04	5,600	1,390	.....	
		.....	.....	.....	.....	.....	.....	2.01	2.04	2.00	4.06	7,100	1,740	1,680	
		Neat.	.....	29.5	92	.....	.....	1.96	1.97	2.02	3.98	19,900	5,000	.....	
		.....	.....	.....	.....	.....	.....	2.00	1.96	2.04	4.04	17,000	4,210	.....	
		.....	.....	.....	.....	.....	.....	1.99	2.04	2.03	4.14	14,600	3,580	.....	
		.....	.....	.....	.....	.....	.....	1.98	1.98	2.02	4.00	14,100	3,530	.....	
		.....	.....	.....	.....	.....	.....	1.96	1.97	2.02	3.98	10,900	2,740	3,800	
		Neat.	.....	29.5	1	90	1	1.99	2.00	2.05	4.10	11,600	2,880	.....	
		.....	.....	.....	.....	.....	.....	2.03	1.92	2.01	3.86	10,100	2,620	.....	
		.....	.....	.....	.....	.....	.....	2.08	2.00	2.01	4.02	8,000	1,990	.....	
		.....	.....	.....	.....	.....	.....	2.01	2.03	2.00	4.06	8,500	2,090	.....	
		.....	.....	.....	.....	.....	.....	1.99	1.99	2.03	4.04	8,200	2,080	2,310	
		Neat.	.....	29.5	184	.....	.....	2.00	2.04	1.98	4.04	15,400	3,810	.....	
		.....	.....	.....	.....	.....	.....	2.06	2.01	1.94	3.90	15,700	4,790	.....	
		.....	.....	.....	.....	.....	.....	2.00	2.07	1.94	4.02	19,500	4,860	.....	
		.....	.....	.....	.....	.....	.....	2.00	2.02	1.98	4.00	21,000	5,250	.....	
		.....	.....	.....	.....	.....	.....	2.00	2.00	2.00	4.00	15,100	3,280	4,400	



Neat.	28.5	1	182	1	2.00	2.00	2.01	4.02	9,300	2,310
					2.00	2.05	2.01	4.14	8,100	1,990
					2.02	2.00	2.05	4.16	9,300	2,290
					2.00	2.02	2.02	4.06	8,300	2,010
					2.04	2.05	1.99	4.04	7,500	1,860
										2,090
Neat.	30.0	3			1.97	2.04	2.02	4.14	7,700	1,860
					1.99	2.04	2.04	4.16	8,250	1,990
					2.02	2.07	1.99	4.12	7,090	1,720
					1.97	2.04	1.97	4.02	8,200	2,040
					1.97	2.02	1.98	4.00	7,150	1,790
										1,870
Neat.	30.0	11			1.99	2.07	2.00	4.14	14,770	3,570
					2.00	2.02	1.99	4.02	12,050	3,000
					2.03	2.06	2.01	4.14	14,140	3,420
					2.04	2.04	1.98	4.04	14,600	3,610
					2.01	2.07	1.98	4.10	15,800	3,850
										3,490
Neat.	30.0	8	7	1	1.98	2.06	1.97	4.06	11,800	2,910
					1.98	2.04	2.03	4.14	10,600	2,560
					1.98	2.04	1.98	4.04	10,100	2,500
					2.04	2.00	1.98	3.96	8,800	2,220
					2.00	2.05	1.98	4.06	9,800	2,410
										2,520
Neat.	30.0	35			2.04	2.02	2.01	4.06	13,900	3,400
					2.01	1.99	1.94	3.86	14,700	3,510
					2.04	2.03	2.02	4.10	11,800	2,800
					2.06	2.03	2.04	4.14	11,000	2,960
					2.05	2.04	2.03	4.14	11,400	3,100
Neat.	30.0	3	31	1	1.91	2.02	2.03	4.10	11,300	2,760
					1.97	2.04	1.98	4.04	10,700	2,650
					1.99	2.05	2.00	4.10	10,300	2,510
					1.97	2.03	1.95	3.88	14,800	3,720
					1.97	2.03	2.00	4.06	12,900	3,150
										2,960
Neat.	30.0	95			2.02	2.04	1.92	3.92	13,700	3,490
					1.96	2.05	1.99	4.06	13,550	3,320
					1.96	2.05	2.01	4.12	13,900	3,390
					1.97	2.05	2.04	4.18	15,800	3,800
					1.96	2.06	1.93	3.98	13,210	3,320
										3,460
Neat.	30.0	3	91	1	1.97	2.05	2.01	4.12	16,700	4,050
					1.99	2.05	2.04	4.15	12,270	2,940
					1.99	2.04	1.98	4.04	12,640	3,130
					1.99	2.00	2.00	4.12	13,250	3,220
					1.97	2.03	1.97	4.00	10,000	2,500
										3,170
Neat.	30.0	203			2.02	1.99	2.06	4.10	10,600	2,590
					1.98	2.02	2.04	4.12	14,200	3,450
					2.00	1.95	2.01	3.92	13,500	3,440
					2.00	2.01	2.03	4.08	16,500	4,040
					2.01	1.97	2.08	4.00	13,500	3,390

Defective corner.

Cracks in cubes acquired during setting.

☆ P. 28. .... Star, without plaster.





DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.			Sec-tional area, Sq. ins.	Compressive strength.			Remarks.	
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.	Total.		Per square inch.	Mean.			
W.H. M. 10	Whiteball	Neat.		Per ct. 23.5	Days. 99	Days.	Days.	Inches.	Inches.	Inches.	Sq. ins.	Pounds.	Pounds.	Pounds.		
								1.99	2.02	2.04	4.12	24,000	5,960			
								1.99	2.04	2.04	4.16	24,200	6,850			
								2.01	2.06	1.98	4.10	26,000	6,340			
								2.01	2.04	1.98	4.04	23,900	6,920			
								1.99	2.03	2.02	4.10	27,400	6,140			
								1.98	2.03	1.98	4.02	25,900	6,440			
					4	23.5	94	1	2.00	2.06	2.05	4.10	26,700	6,510		
									2.02	1.99	1.99	4.04	24,600	6,140		
									1.96	2.03	2.04	4.14	24,000	5,800		
							2.00	2.01	2.06	4.18	26,600	6,120	6,200			
		Neat.		23.5	188		2.01	1.99	2.06	4.08	19,600	4,800				
							2.04	1.99	2.05	4.08	24,100	5,010				
							1.99	2.00	2.02	4.06	23,400	5,280				
							1.99	2.01	2.02	4.06	24,600	6,080				
							2.03	2.00	2.04	4.08	26,300	5,290	5,850			
		Neat.		23.5	4	189	2.02	2.00	2.05	4.10	26,500	6,460				
							2.04	2.02	2.02	4.04	27,900	6,910				
							2.00	2.04	2.02	4.12	21,800	5,170				
							1.98	2.00	2.02	4.04	25,800	6,260				
							2.00	2.01	2.04	4.10	22,000	5,370	6,060			
		Neat.		23.5	7		2.03	2.02	2.01	4.06	23,400	5,760				
							2.10	2.02	2.01	4.06	19,900	4,900				
							2.02	2.00	2.02	4.04	20,500	5,070				
							2.05	2.00	2.06	4.10	22,800	5,440				
							1.99	2.02	2.00	4.04	20,400	5,050	5,250			
		Neat.		23.5	16		2.01	2.00	2.04	4.08	20,200	4,950				
							2.01	2.04	2.01	4.10	20,700	5,050				
							2.02	2.01	2.01	4.04	24,700	6,110				
							2.00	2.06	2.04	4.20	19,200	4,570				
							2.02	2.00	2.02	4.04	24,100	5,970	5,380			

Neat.	23.5	7	8	1	2.03	2.01	2.06	4.14	17,900	4,320
					1.98	2.04	2.04	4.08	24,900	6,100
					2.02	2.08	2.02	4.10	26,000	6,340
					2.01	2.01	2.02	4.06	26,400	6,260
					1.96	2.00	2.00	4.00	21,100	5,280
Neat.	23.5	41			1.92	2.01	2.04	4.10	18,800	4,660
					2.02	2.01	1.99	4.00	22,650	5,660
					1.94	1.99	2.06	4.10	29,100	7,100
					2.03	2.02	2.06	4.14	26,900	6,280
					1.99	2.01	1.98	3.98	21,100	5,300
Neat.	23.5	7	83	1	2.02	2.02	2.06	4.14	29,180	7,040
					2.04	2.01	2.04	4.10	21,720	5,300
					2.02	1.96	2.02	4.00	21,700	5,480
					2.02	2.04	2.02	4.12	22,800	5,680
					1.99	2.02	2.02	4.08	27,000	6,620
Neat.	23.5	101			2.00	2.01	2.01	4.04	22,800	5,520
					2.01	2.04	2.00	4.08	23,000	5,640
					2.01	1.99	2.06	4.10	26,100	6,850
					2.01	2.00	2.09	4.18	27,500	6,660
					1.96	2.01	2.00	4.02	21,700	5,400
Neat.	23.5	7	93	1	2.02	1.98	2.06	4.08	24,900	6,100
					2.05	1.97	2.08	4.02	19,700	4,900
					2.07	1.97	2.08	4.00	20,700	5,190
					2.01	1.99	2.00	3.98	24,800	6,110
					2.01	2.03	2.08	4.12	22,800	5,560
Neat.	23.5	192			1.97	2.00	2.02	4.04	21,100	5,220
					2.03	2.02	2.01	4.06	24,800	6,080
					2.00	2.01	2.02	4.06	26,800	6,970
					2.02	2.08	2.00	4.06	19,800	4,900
					2.05	2.02	2.00	4.04	23,800	5,640
Neat.	23.5	7	184	1	2.02	2.02	2.00	4.04	20,100	4,980
					2.02	2.01	2.00	4.02	20,100	5,000
					2.02	2.01	2.01	4.04	22,700	5,620
					2.01	2.02	2.02	4.08	19,400	4,750
					2.00	2.01	2.02	4.06	20,800	5,120
Neat.	37.5	1			2.00	1.94	2.04	3.96	1,890	351
					2.08	2.00	2.03	3.92	1,310	334
					2.01	2.00	2.04	4.06	1,400	343
					2.01	2.00	2.02	4.04	1,800	322
					2.01	2.06	2.00	4.16	1,420	341
Neat.	37.5	9			2.00	2.06	2.00	4.12	2,000	485
					2.02	1.98	2.06	4.06	2,100	517
					2.01	2.02	2.06	4.20	2,680	626
					2.02	2.06	2.06	4.26	2,290	536
					2.02	2.02	2.03	4.10	2,060	495

Aus. F. 18..... Austin.....

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.	Total.		Per square inch.	Mean.		
Ans. F. 18.....	Austin.....	Neat.		Per ct. 37.5	Days 1	Days 7	Days 1	Inches 1.98	Inches 1.99	Sq. ins. 4.14	Pounds 507	Pounds 507			
								2.06	2.08	4.06	544	544			
								2.01	2.06	4.16	687	687			
								2.02	2.04	4.10	561	561			
								1.99	2.06	4.06	562	562		562	
		Neat.		37.5	82			2.01	2.06	4.20	698	698			
								2.06	2.02	4.02	776	776			
								2.04	1.99	3.92	612	612			
								1.98	2.01	4.22	859	859			
								2.01	2.02	4.04	817	817		748	
		Neat.		37.5	1	80		2.01	2.07	2.06	618	618			
								1.99	2.10	4.24	585	585			
						2.01	2.12	4.28	579	579					
						2.04	2.00	4.08	618	618					
						1.99	2.06	2.02	589	589		588			
Neat.		37.5	91			1.99	2.02	2.04	898	898					
						2.08	2.00	4.12	870	870					
						2.06	2.06	4.12	862	862					
						2.02	2.07	4.14	848	848					
						2.02	2.00	4.10	865	865					
						2.00	2.06	4.16	868	868		749			
Neat.		37.5	1	89		2.03	1.98	2.04	698	698					
						2.00	2.00	4.08	686	686					
						2.03	2.01	2.07	683	683					
						2.08	2.04	4.22	694	694					
						2.06	2.01	2.06	676	676		678			
Neat.		37.5	188			2.00	2.05	2.08	714	714					
						2.08	2.02	2.06	908	908					
						2.06	2.01	4.14	990	990					
						2.08	2.00	2.04	882	882					
						1.97	2.00	2.08	820	820		850			

Neat.	87.5	1	181	1	2.01	2.02	2.04	4.12	2,580	626
.....	.....	.....	.....	.....	2.04	2.01	2.02	4.06	3,200	788
.....	.....	.....	.....	.....	2.08	2.04	2.02	4.06	2,780	681
.....	.....	.....	.....	.....	2.02	1.97	2.06	4.06	2,700	665
.....	.....	.....	.....	.....	.....	.....	.....	4.04	3,100	767
Neat.	34.5	4	.....	.....	2.00	2.08	2.00	4.06	1,700	419
.....	.....	.....	.....	.....	1.99	2.07	1.96	4.06	1,680	407
.....	.....	.....	.....	.....	2.02	2.06	2.02	4.12	1,700	407
.....	.....	.....	.....	.....	1.97	2.06	2.00	4.24	1,540	383
.....	.....	.....	.....	.....	.....	.....	.....	4.12	1,880	444
Neat.	34.5	12	.....	.....	2.02	2.01	2.01	4.04	2,150	582
.....	.....	.....	.....	.....	2.08	2.06	2.03	4.16	2,300	588
.....	.....	.....	.....	.....	1.98	2.07	2.04	4.22	2,370	582
.....	.....	.....	.....	.....	2.06	2.06	2.00	4.10	2,310	568
.....	.....	.....	.....	.....	2.00	2.04	2.02	4.12	2,420	587
Neat.	34.5	4	7	1	2.02	2.08	2.01	4.06	2,310	566
.....	.....	.....	.....	.....	2.02	2.06	2.01	4.06	2,150	585
.....	.....	.....	.....	.....	2.08	2.01	2.02	4.06	2,100	517
.....	.....	.....	.....	.....	2.01	2.04	1.99	4.06	2,120	522
.....	.....	.....	.....	.....	2.06	2.06	2.01	4.18	2,370	567
Neat.	34.5	35	.....	.....	2.02	2.04	2.06	4.18	3,280	785
.....	.....	.....	.....	.....	1.98	2.06	2.00	4.12	3,360	815
.....	.....	.....	.....	.....	2.00	2.06	2.02	4.18	3,910	985
.....	.....	.....	.....	.....	2.02	2.07	2.02	4.18	3,500	887
.....	.....	.....	.....	.....	1.97	2.04	1.99	4.06	2,510	618
Neat.	34.5	4	80	1	2.00	2.09	2.04	4.26	2,500	587
.....	.....	.....	.....	.....	2.04	2.06	2.02	4.16	2,210	581
.....	.....	.....	.....	.....	2.04	2.02	2.06	4.14	2,390	577
.....	.....	.....	.....	.....	2.00	2.04	2.04	4.16	2,450	569
.....	.....	.....	.....	.....	2.00	2.06	2.00	4.12	2,410	565
Neat.	34.5	99	.....	.....	2.05	2.04	2.00	4.06	5,840	1,480
.....	.....	.....	.....	.....	2.01	2.06	1.99	4.06	6,920	1,450
.....	.....	.....	.....	.....	2.00	2.08	2.02	4.10	6,300	1,640
.....	.....	.....	.....	.....	1.99	2.07	2.06	4.24	6,000	1,180
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1,400
Neat.	34.5	4	94	1	2.00	2.04	1.94	3.96	2,700	682
.....	.....	.....	.....	.....	2.06	2.06	2.04	4.18	2,960	708
.....	.....	.....	.....	.....	2.04	2.08	2.00	4.06	3,300	813
.....	.....	.....	.....	.....	2.01	2.06	2.06	4.20	2,900	690
.....	.....	.....	.....	.....	2.01	2.06	2.06	4.20	2,450	588
Neat.	34.5	189	.....	.....	2.00	2.01	2.06	4.12	6,100	1,480
.....	.....	.....	.....	.....	2.01	2.08	2.02	4.10	2,400	585
.....	.....	.....	.....	.....	2.08	2.00	2.06	4.12	3,200	1,490
.....	.....	.....	.....	.....	1.97	2.00	2.02	4.04	3,100	2,000
.....	.....	.....	.....	.....	2.08	2.02	2.08	4.10	3,400	1,620

Aug. M. 7..... Austin.....





CEMENT.

Ans. F. 19	Austin	Neat.	35.0	108	2.05	2.08	2.01	4.12	2,740	665
.....	.....	.....	.....	.....	1.98	2.03	1.99	4.04	2,850	705
.....	.....	.....	.....	.....	2.01	2.04	1.99	4.06	2,420	588
.....	.....	.....	.....	.....	2.03	2.09	1.98	4.15	2,400	577
.....	.....	.....	.....	.....	2.03	2.08	2.00	4.16	2,150	612
Neat.	.....	.....	35.0	7	1.98	2.08	2.00	4.16	1,600	385
.....	.....	.....	.....	.....	2.02	2.08	1.98	4.06	1,600	388
.....	.....	.....	.....	.....	2.00	2.06	1.96	4.12	8,760	910
.....	.....	.....	.....	.....	1.97	2.07	1.98	4.15	2,510	600
.....	.....	.....	.....	.....	2.06	2.07	1.98	4.12	8,080	750
Neat.	.....	.....	35.0	188	1.97	1.98	2.06	4.08	2,280	559
.....	.....	.....	.....	.....	1.97	1.99	2.07	4.12	1,900	481
.....	.....	.....	.....	.....	2.07	1.95	2.06	4.02	1,960	488
.....	.....	.....	.....	.....	2.02	2.04	2.06	4.20	2,450	583
.....	.....	.....	.....	.....	1.92	2.02	2.06	4.16	2,640	635
Neat.	.....	.....	35.0	7	2.07	1.99	2.04	4.06	4,600	1,180
.....	.....	.....	.....	.....	1.98	2.00	2.06	4.12	8,200	777
.....	.....	.....	.....	.....	1.99	2.00	2.08	4.16	2,500	601
.....	.....	.....	.....	.....	1.99	1.94	2.06	4.00	8,700	925
.....	.....	.....	.....	.....	1.99	2.02	2.06	4.16	4,600	909
Neat.	.....	.....	35.0	a1	2.02	2.01	2.01	4.04	2,100	590
.....	.....	.....	.....	.....	2.00	2.12	2.01	4.26	2,200	516
.....	.....	.....	.....	.....	2.00	2.00	2.06	4.10	2,350	573
.....	.....	.....	.....	.....	1.96	1.95	2.01	3.92	2,320	592
.....	.....	.....	.....	.....	2.06	2.08	1.99	4.04	2,600	644
Neat.	.....	.....	35.0	a1	1.97	2.04	2.03	4.14	2,280	551
.....	.....	.....	.....	.....	1.96	2.04	2.03	4.14	2,170	524
.....	.....	.....	.....	.....	1.98	2.05	2.03	4.16	2,500	601
.....	.....	.....	.....	.....	1.97	2.02	2.05	4.14	2,480	601
.....	.....	.....	.....	.....	2.02	2.03	2.00	4.06	2,210	544
Neat.	.....	.....	35.0	a1	1.98	2.03	2.05	4.16	2,880	692
.....	.....	.....	.....	.....	2.01	2.02	2.08	4.10	2,750	670
.....	.....	.....	.....	.....	2.06	2.00	2.06	4.12	2,680	650
.....	.....	.....	.....	.....	2.04	2.01	4.02	4.06	2,600	640
.....	.....	.....	.....	.....	2.00	2.02	2.06	4.16	2,680	644
Neat.	.....	.....	35.0	a1	2.02	2.04	2.04	4.16	3,700	911
.....	.....	.....	.....	.....	1.99	1.97	2.06	4.06	2,950	727
.....	.....	.....	.....	.....	2.05	2.01	2.07	4.16	2,960	712
.....	.....	.....	.....	.....	1.92	2.04	2.06	4.20	8,200	762
.....	.....	.....	.....	.....	1.95	2.05	2.04	4.18	8,450	825

This lot exposed to freezing weather 30 F and lower 1 hour after molding. Re-moved to freezer at zero F. the following day.

Do.

Do.

Do

α At 80° F. and lower.

DETAILS OF COMPRESSION TESTS OF SPECIMENS WHICH SET IN AIR AT 0° F., PRECEDED BY DIFFERENT INTERVALS AT 70° F., ETC.—Continued.

Marks.	Brand of cement.	Composition.			Time of setting in air at temperatures of—			Dimensions.		Sec-tional area.	Compressive strength.			Remarks.		
		Ce-ment.	Sand.	Water.	70° F.	0° F.	70° F.	Height.	Compressed surface.		Total.	Per square inch.	Mean.			
									Inches.						Inches.	
N. & R. F 26	Newark and Rosendale.	Neat.		Per ct. 88.0	Days 1	Days	Days	2.01	2.06	2.06	2.07	2.07	2.06	890	210	Pounds.
								2.02	2.06	2.06	2.07	2.07	2.06	890	210	
								2.03	2.06	2.06	2.07	2.07	2.06	890	210	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
								2.00	2.06	2.06	2.07	2.07	2.06	880	212	
		Neat.		88.0	9			2.01	2.06	2.06	2.07	2.07	2.06	2,490	570	
								1.99	2.06	2.06	2.07	2.07	2.06	2,560	598	
								2.05	2.06	2.06	2.07	2.07	2.06	2,500	604	
								2.05	2.02	2.02	2.03	2.03	2,750	671		
								1.96	2.06	2.06	2.07	2.07	2,440	569	606	
		Neat.		88.0	1	7	1	2.06	2.04	2.04	2.05	2.05	1,890	388		
								2.00	2.10	2.10	2.00	2.00	1,400	329		
								2.08	2.10	2.10	2.00	2.00	1,450	345		
								2.04	2.05	2.05	2.00	2.00	1,400	339		
								2.01	2.05	2.05	2.01	2.01	1,620	391	347	
		Neat.		88.0	31			2.00	2.07	2.07	2.02	2.02	4,460	1,070		
								1.99	2.04	2.04	2.00	2.00	3,810	984		
								1.98	2.07	2.07	2.00	2.00	4,400	1,060		
								2.00	2.06	2.06	2.02	2.02	4,390	1,040		
								2.00	2.10	2.10	2.06	2.06	3,900	915	1,000	
		Neat.		88.0	1	29	1	1.99	2.05	2.05	2.02	2.02	2,010	486		
								1.99	2.06	2.06	2.00	2.00	1,980	481		
								2.00	2.04	2.04	2.05	2.05	2,000	478		
								1.99	2.07	2.07	2.00	2.00	2,100	507		
								2.02	2.06	2.06	2.08	2.08	1,900	450	480	
		Neat.		88.0	97			1.99	2.06	2.06	1.98	1.98	6,510	1,660		
								2.00	2.06	2.06	2.00	2.00	5,320	1,290		
								2.00	2.05	2.05	2.00	2.00	4,990	1,230		
								2.00	2.05	2.05	2.01	2.01	4,710	1,140		
								2.02	2.06	2.06	2.01	2.01	4,300	1,080	1,260	

Neat.	88.0	1	96	1	2.08	2.07	2.01	4.16	2,400	577	.....
.....	.....	.....	.....	.....	2.00	2.06	2.01	4.06	2,880	588	.....
.....	.....	.....	.....	.....	2.06	2.08	2.01	4.14	1,900	459	.....
.....	.....	.....	.....	.....	2.01	2.08	2.06	4.28	2,190	512	.....
.....	.....	.....	.....	.....	2.01	2.08	2.06	4.16	2,800	583	587
Neat.	88.0	184	.....	.....	2.01	2.01	2.06	4.18	6,100	1,460	.....
.....	.....	.....	.....	.....	2.08	1.96	2.04	4.00	6,700	1,680	.....
.....	.....	.....	.....	.....	2.06	2.00	2.00	4.10	4,600	1,100	.....
.....	.....	.....	.....	.....	2.00	2.01	2.01	4.14	6,250	1,270	.....
.....	.....	.....	.....	.....	2.00	2.01	2.06	4.14	6,500	1,570	1,420
Neat.	88.0	1	182	1	2.00	2.00	2.06	4.16	2,100	508	.....
.....	.....	.....	.....	.....	1.94	2.06	2.06	4.22	2,000	498	.....
.....	.....	.....	.....	.....	1.97	2.00	2.06	4.10	2,800	643	.....
.....	.....	.....	.....	.....	2.11	1.97	2.06	4.04	2,240	552	.....
.....	.....	.....	.....	.....	2.01	2.04	2.06	4.20	2,200	524	527
Neat.	88.1	4	.....	.....	2.00	2.06	2.08	4.18	1,400	385	.....
.....	.....	.....	.....	.....	1.99	2.05	1.97	4.04	1,450	369	.....
.....	.....	.....	.....	.....	1.99	2.06	2.06	4.22	1,500	365	.....
.....	.....	.....	.....	.....	2.01	2.05	2.08	4.26	1,410	331	.....
.....	.....	.....	.....	.....	1.97	2.04	2.00	4.08	1,380	341	844
Neat.	88.1	14	.....	.....	2.02	2.08	2.00	4.16	2,400	577	.....
.....	.....	.....	.....	.....	1.99	2.06	1.99	4.10	2,210	588	.....
.....	.....	.....	.....	.....	2.00	2.09	2.00	4.18	2,420	579	.....
.....	.....	.....	.....	.....	2.00	2.08	1.98	4.12	2,450	596	.....
.....	.....	.....	.....	.....	1.94	2.02	2.06	4.16	2,920	702	566
Neat.	88.1	4	9	1	1.99	3.08	2.04	4.14	2,010	466	.....
.....	.....	.....	.....	.....	1.99	2.08	1.99	4.14	1,990	481	.....
.....	.....	.....	.....	.....	1.99	2.06	1.98	4.06	1,900	468	.....
.....	.....	.....	.....	.....	2.02	2.07	2.02	4.18	1,820	455	.....
.....	.....	.....	.....	.....	2.02	2.06	1.98	4.06	2,010	496	478
Neat.	88.1	85	.....	.....	2.02	2.07	2.02	4.18	4,010	959	.....
.....	.....	.....	.....	.....	2.00	2.06	2.00	4.12	3,750	910	.....
.....	.....	.....	.....	.....	2.00	2.04	2.00	4.06	4,200	1,080	.....
.....	.....	.....	.....	.....	2.00	2.06	2.02	4.14	4,560	1,100	.....
.....	.....	.....	.....	.....	2.00	2.08	1.99	4.14	8,610	8,610	974
Neat.	88.1	4	80	1	2.02	2.09	2.02	4.22	2,400	589	.....
.....	.....	.....	.....	.....	1.97	2.06	2.02	4.14	1,910	461	.....
.....	.....	.....	.....	.....	1.99	2.07	2.02	4.18	2,080	498	.....
.....	.....	.....	.....	.....	1.99	2.06	1.98	4.08	2,270	568	.....
.....	.....	.....	.....	.....	1.99	2.07	2.02	4.18	2,090	500	517

N. & R. M 11.... Newark and Rosendale.



Neat.	38.1	7	7	1	1.08	2.08	2.08	2.00	4.08	2,150	580
.....	.....	.....	.....	.....	1.97	2.02	2.02	1.97	3.98	2,090	594
.....	.....	.....	.....	.....	2.04	2.02	2.02	2.02	4.98	2,100	595
.....	.....	.....	.....	.....	2.01	2.01	2.01	1.99	4.98	2,110	597
.....	.....	.....	.....	.....	.....	.....	.....	4.00	4.00	2,080	515
Neat.	38.1	40	.....	.....	2.07	2.02	2.04	2.04	4.16	4,580	1,100
.....	.....	.....	.....	.....	2.01	2.03	2.02	2.01	4.06	4,630	1,140
.....	.....	.....	.....	.....	1.99	2.04	2.02	2.02	4.10	4,280	1,040
.....	.....	.....	.....	.....	2.06	2.03	2.07	2.04	4.22	4,300	1,020
.....	.....	.....	.....	.....	.....	.....	.....	4.14	4.14	4,640	1,100
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1,060
Neat.	38.1	7	82	1	2.00	2.02	2.06	2.06	4.16	2,990	719
.....	.....	.....	.....	.....	2.00	2.01	2.05	2.05	4.12	2,700	655
.....	.....	.....	.....	.....	2.00	2.04	1.99	2.02	4.06	2,910	717
.....	.....	.....	.....	.....	2.04	2.01	2.02	2.04	4.06	2,620	621
.....	.....	.....	.....	.....	2.02	2.06	2.04	2.04	4.20	2,950	702
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	688
Neat.	38.1	100	.....	.....	2.06	2.04	2.03	2.03	4.14	6,400	1,650
.....	.....	.....	.....	.....	2.00	2.01	2.00	2.00	4.02	6,200	1,290
.....	.....	.....	.....	.....	2.01	2.08	2.01	2.01	4.08	6,300	1,300
.....	.....	.....	.....	.....	2.02	2.03	2.00	2.00	4.06	6,500	1,350
.....	.....	.....	.....	.....	1.98	2.04	2.01	2.01	4.10	6,000	1,220
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1,340
Neat.	38.1	7	92	1	2.01	2.04	2.06	2.06	4.18	3,900	789
.....	.....	.....	.....	.....	2.01	2.01	2.06	2.06	4.12	3,900	704
.....	.....	.....	.....	.....	2.04	2.03	2.03	2.03	4.12	3,500	850
.....	.....	.....	.....	.....	2.01	2.04	2.06	2.06	4.20	3,300	786
.....	.....	.....	.....	.....	2.04	2.04	2.02	2.02	4.12	3,300	801
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	786
Neat.	38.1	191	.....	.....	1.96	2.06	2.04	2.04	4.18	4,900	1,170
.....	.....	.....	.....	.....	2.01	2.06	2.02	2.02	4.16	5,200	1,250
.....	.....	.....	.....	.....	2.06	1.92	2.06	2.06	3.96	4,600	1,160
.....	.....	.....	.....	.....	2.06	2.02	2.02	2.02	4.08	5,900	1,450
.....	.....	.....	.....	.....	2.01	2.08	2.02	2.02	4.10	6,400	1,560
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	1,820
Neat.	38.1	7	183	1	2.04	2.04	2.06	2.06	4.18	3,100	742
.....	.....	.....	.....	.....	2.02	2.00	2.06	2.06	4.12	3,700	898
.....	.....	.....	.....	.....	1.99	2.08	2.02	2.02	4.10	4,400	1,070
.....	.....	.....	.....	.....	2.00	2.02	2.04	2.04	4.12	3,800	900
.....	.....	.....	.....	.....	1.97	2.01	2.00	2.00	4.02	4,100	1,020

# CEMENTS WHICH SET IN AIR AT DIFFERENT TEMPERATURES.

## RÉSUMÉ OF RESULTS.

Brand of cement.	Date of manu- facture.	Composition.			Time of setting in air at temperatures of:—			Total age.	Mean com- pressive strength per square inch.	Remarks.
		Cement.	Sand.	Water.	70° F.	90° F.	70° F.			
					Days.	Days.	Days.			
Alpha	1902. Feb. 20	Neat.	.....	Per cent. 25.0	1	.....	.....	1	Pounds. 582	
		.....	.....	.....	9	.....	.....	9	4,990	
		.....	.....	.....	88	.....	.....	88	6,320	
		.....	.....	.....	98	.....	.....	98	5,480	
Do.	do.	Neat.	.....	25.0	1	.....	.....	9	2,400	
		.....	.....	.....	7	.....	.....	7	2,900	
		.....	.....	.....	31	.....	.....	31	3,680	
		.....	.....	.....	91	.....	.....	91	3,670	
Do.	Mar. 8	Neat.	.....	25.0	1	.....	.....	181	4,460	
		.....	.....	.....	179	.....	.....	179	4,740	
		.....	.....	.....	4	.....	.....	4	5,980	
		.....	.....	.....	12	.....	.....	12	5,720	
Do.	do.	Neat.	.....	25.0	4	.....	.....	98	5,450	
		.....	.....	.....	188	.....	.....	188	4,720	
		.....	.....	.....	4	.....	.....	4	5,220	
		.....	.....	.....	4	.....	.....	4	5,720	
Do.	Apr. 26	Neat.	.....	25.0	4	.....	.....	188	5,560	
		.....	.....	.....	7	.....	.....	7	5,780	
		.....	.....	.....	17	.....	.....	17	4,660	
		.....	.....	.....	38	.....	.....	38	5,170	
Do.	do.	Neat.	.....	25.0	7	.....	.....	106	5,940	
		.....	.....	.....	198	.....	.....	198	5,160	
		.....	.....	.....	7	.....	.....	7	4,580	
		.....	.....	.....	7	.....	.....	7	5,170	
Atlas	Feb. 27	Neat.	.....	24.0	1	.....	.....	105	5,350	
		.....	.....	.....	9	.....	.....	9	690	
		.....	.....	.....	33	.....	.....	33	4,180	
		.....	.....	.....	96	.....	.....	96	5,020	
.....	.....	.....	188	.....	.....	188	5,560			
.....	.....	.....	188	.....	.....	188	5,410			

Do.....do.....	Neat.	24.0	1	7	1	9	2,140
			1	81	1	33	2,550
			1	84	1	36	2,770
			1	181	1	133	2,950
Do.....	Neat.	23.5	4			4	3,270
			12			12	4,230
			37			37	4,430
			96			96	5,310
			190			190	5,040
Do.....	Neat.	23.5	4	7	1	12	3,630
			4	32	1	37	3,458
			4	91	1	96	4,180
			4	186	1	191	3,970
Do.....	Neat.	24.0	7			7	3,730
			15			15	4,390
			38			38	5,110
			97			97	5,930
			191			191	5,730
Do.....do.....	Neat.	24.0	7	7	1	15	4,210
			7	30	1	38	3,960
			7	89	1	97	4,420
			7	184	1	192	4,500
Star, with plaster.....	Neat.	27.0	1			1	1,090
			11			11	4,410
			33			33	5,340
			91			91	5,630
			187			187	5,500
Do.....do.....	Neat.	27.0	1	9	1	11	2,680
			1	31	1	33	3,350
			1	89	1	91	3,410
			1	185	1	187	4,070
Do.....	Neat.	26.0	10			10	5,080
			33			33	5,660
			94			94	6,080
			186			186	6,400
Do.....do.....	Neat.	25.0	2	7	1	10	4,240
			2	30	1	33	4,110
			2	91	1	94	5,170
			2	183	1	186	5,540
Do.....	Neat.	25.0	4			4	5,040
			12			12	5,730
			36			36	6,400
			100			100	6,400
			190			190	6,800

RESUME OF RESULTS—Continued.

Brand of cement.	Date of man- ufacture.	Composition.			Time of setting in air at temperatures of—			Total age.	Mean com- pressive strength per square Inch.	Remarks.
		Cement.	Sand.	Water.	70° F.	0° F.	70° F.			
Star, with plaster.....	1902, Mar. 6	Neat.	.....	Per cent. 25.0	Days. 4	Days. 7	Days. 1	12	5,620	
					4	31	1	36	5,190	
					4	95	1	100	5,920	
					4	185	1	190	6,270	
Do.....	Mar. 14	Neat.	.....	24.5	7	.....	.....	7	4,710	
					15	.....	.....	15	5,820	
					42	.....	.....	42	5,400	
					95	.....	.....	95	6,260	
					189	.....	.....	189	6,340	
Do.....do	.....do	Neat.	.....	24.5	7	7	1	15	4,740	
					7	34	1	42	5,660	
					7	87	1	95	5,870	
					7	182	1	190	5,790	
Do.....	Feb. 19	Neat	.....	24.0	1 at 20° to 26° F.	7	1	9	1,290	This lot exposed to weather 20° F. 1 hour after molding, and ranged from 20° to 26° F. the first day. Put in freezer at zero F. the next day.
						25	1	31	1,250	
						180	1	34	1,810	
						.....	.....	182	1,700	
Star, without plaster.....	Feb. 17	Neat.	.....	29.5	1	.....	.....	1	338	
					6	.....	.....	9	2,450	
					82	.....	.....	82	3,400	
					82	.....	.....	92	2,800	
					184	.....	.....	184	4,400	
Do.....do	.....do	Neat.	.....	29.5	1	7	1	9	1,400	
					1	30	1	32	1,680	
					1	90	1	92	2,310	
					1	182	1	184	2,090	
Do.....	Feb. 28	Neat.	.....	30.0	3	.....	.....	3	1,870	
					11	.....	.....	11	3,490	
					35	.....	.....	35	3,100	
					95	.....	.....	95	3,460	
					203	.....	.....	203	3,380	





## RESUME OF RESULTS—Continued.

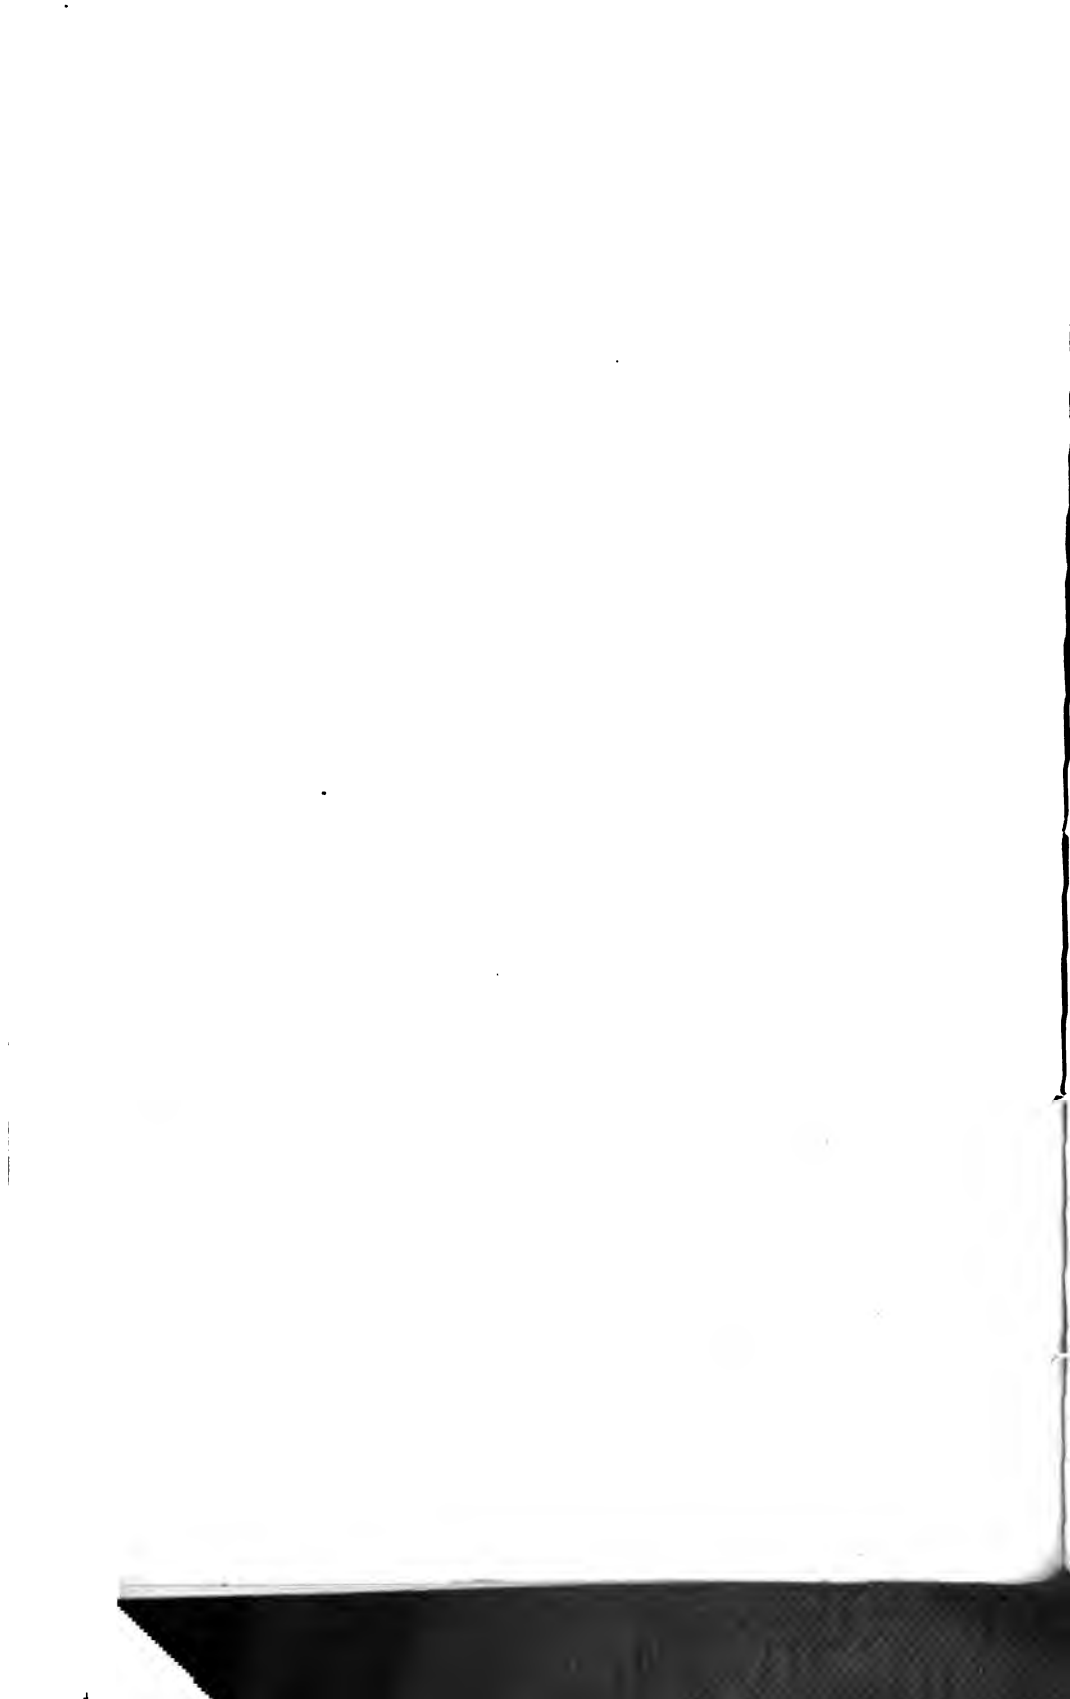
Brand of cement.	Date of manu- facture.	Composition.			Time of setting in air at temperatures of—			Total age.	Mean com- pressive strength per square inch.	Remarks.
		Cement.	Sand.	Water.	70° F.	0° F.	70° F.			
Austin.....	1902 Mar. 7	Neat.....	.....	Per cent. 84.5	Days. 4	Days. .....	Days. .....	Pounds. 407		
					12	.....	.....	559		
					35	.....	.....	798		
					99	.....	.....	1,400		
					189	.....	.....	1,620		
Do.....	.....do	Neat.....	.....	84.5	4	7	1	541		
					4	30	1	574		
					4	94	1	695		
					4	184	1	913		
Do.....	Mar. 15	Neat.....	.....	85.0	7	.....	7	492		
					14	.....	14	571		
					41	.....	41	628		
					103	.....	103	612		
					198	.....	198	545		
Do.....	.....do	Neat.....	.....	85.0	7	6	1	498		
					7	33	1	535		
					7	95	1	608		
					7	181	1	909		
Do.....	Feb. 19	Neat.....	.....	85.0	c1	7	1	569	This lot exposed to freezing weather—30° F. and lower—1 hour after molding. Removed to freezer at zero F. the following day.	
					c1	29	1	564		
					c1	92	1	659		
					c1	180	1	787		
					1	.....	1	201		
Newark and Rosendale.....	Feb. 26	Neat.....	.....	86.0	1	.....	1	405		
					9	.....	9	1,040		
					31	.....	31	1,240		
					97	.....	97	1,240		
					184	.....	184	1,420		
Do.....	.....do	Neat.....	.....	86.0	1	7	1	847		
					1	29	1	460		
					1	68	1	537		
					1	182	1	527		

c At 30° F. and lower.







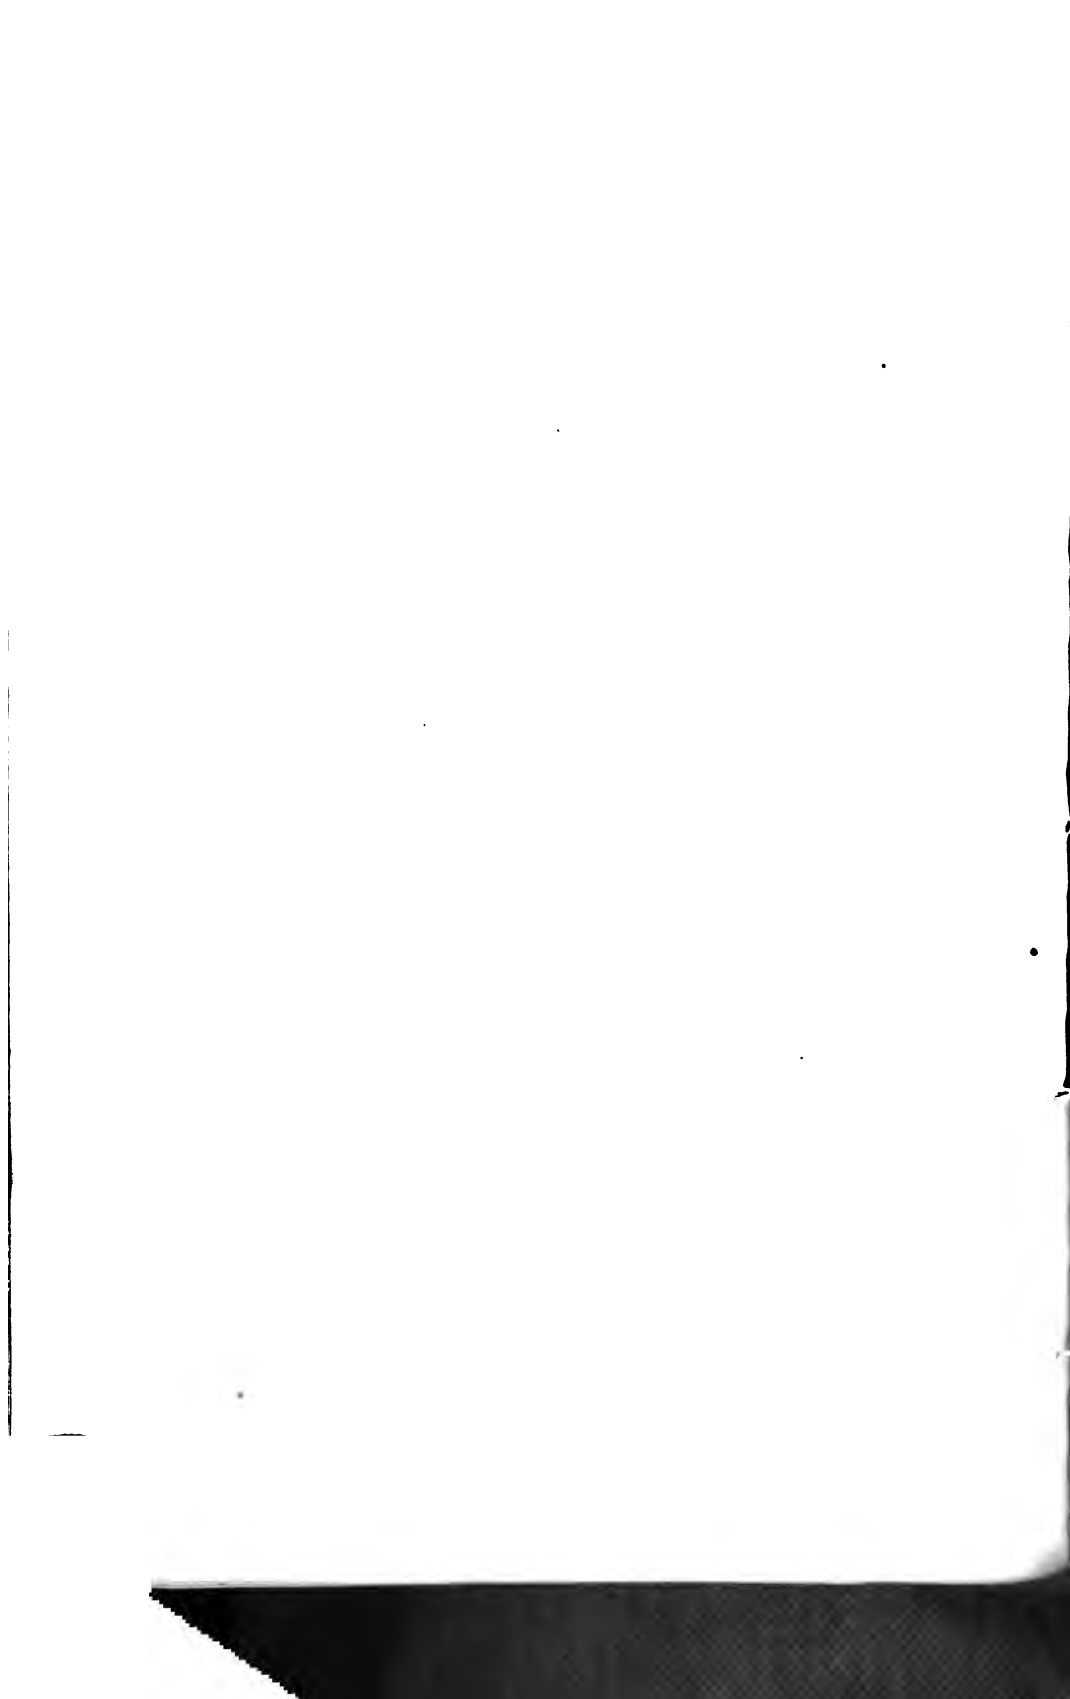















THE MORNING PETER



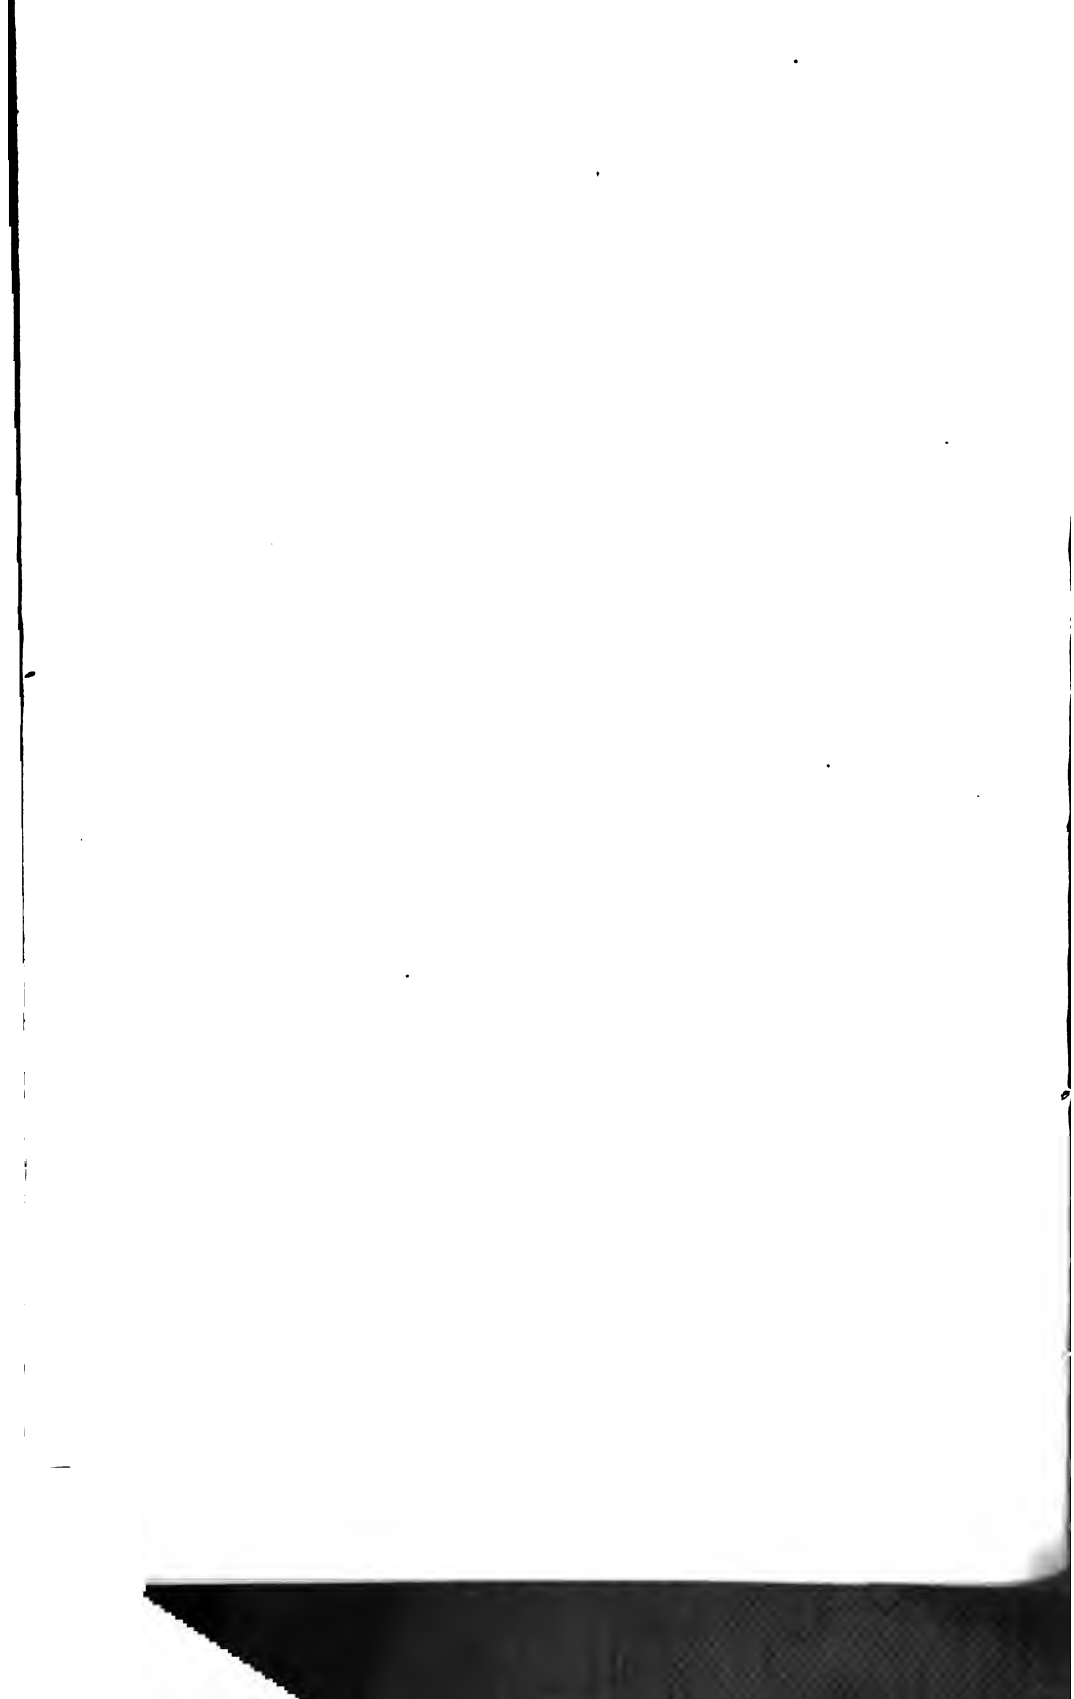



















*Compressive strength.*

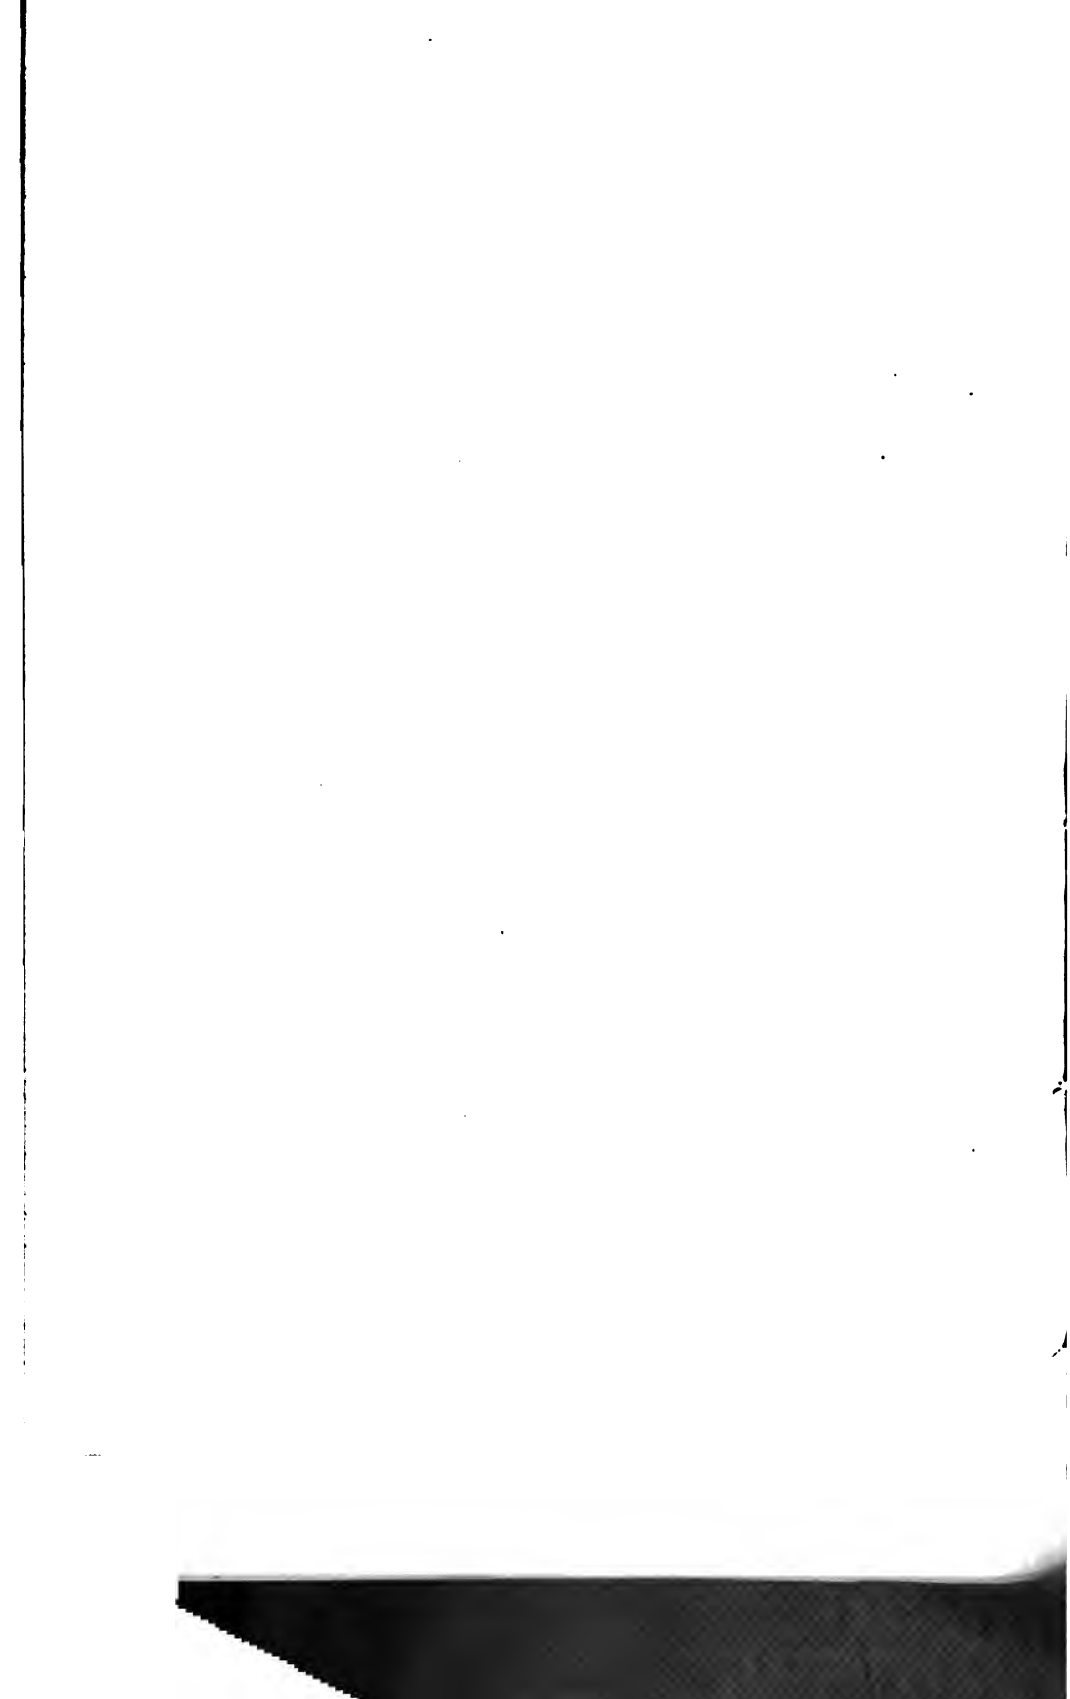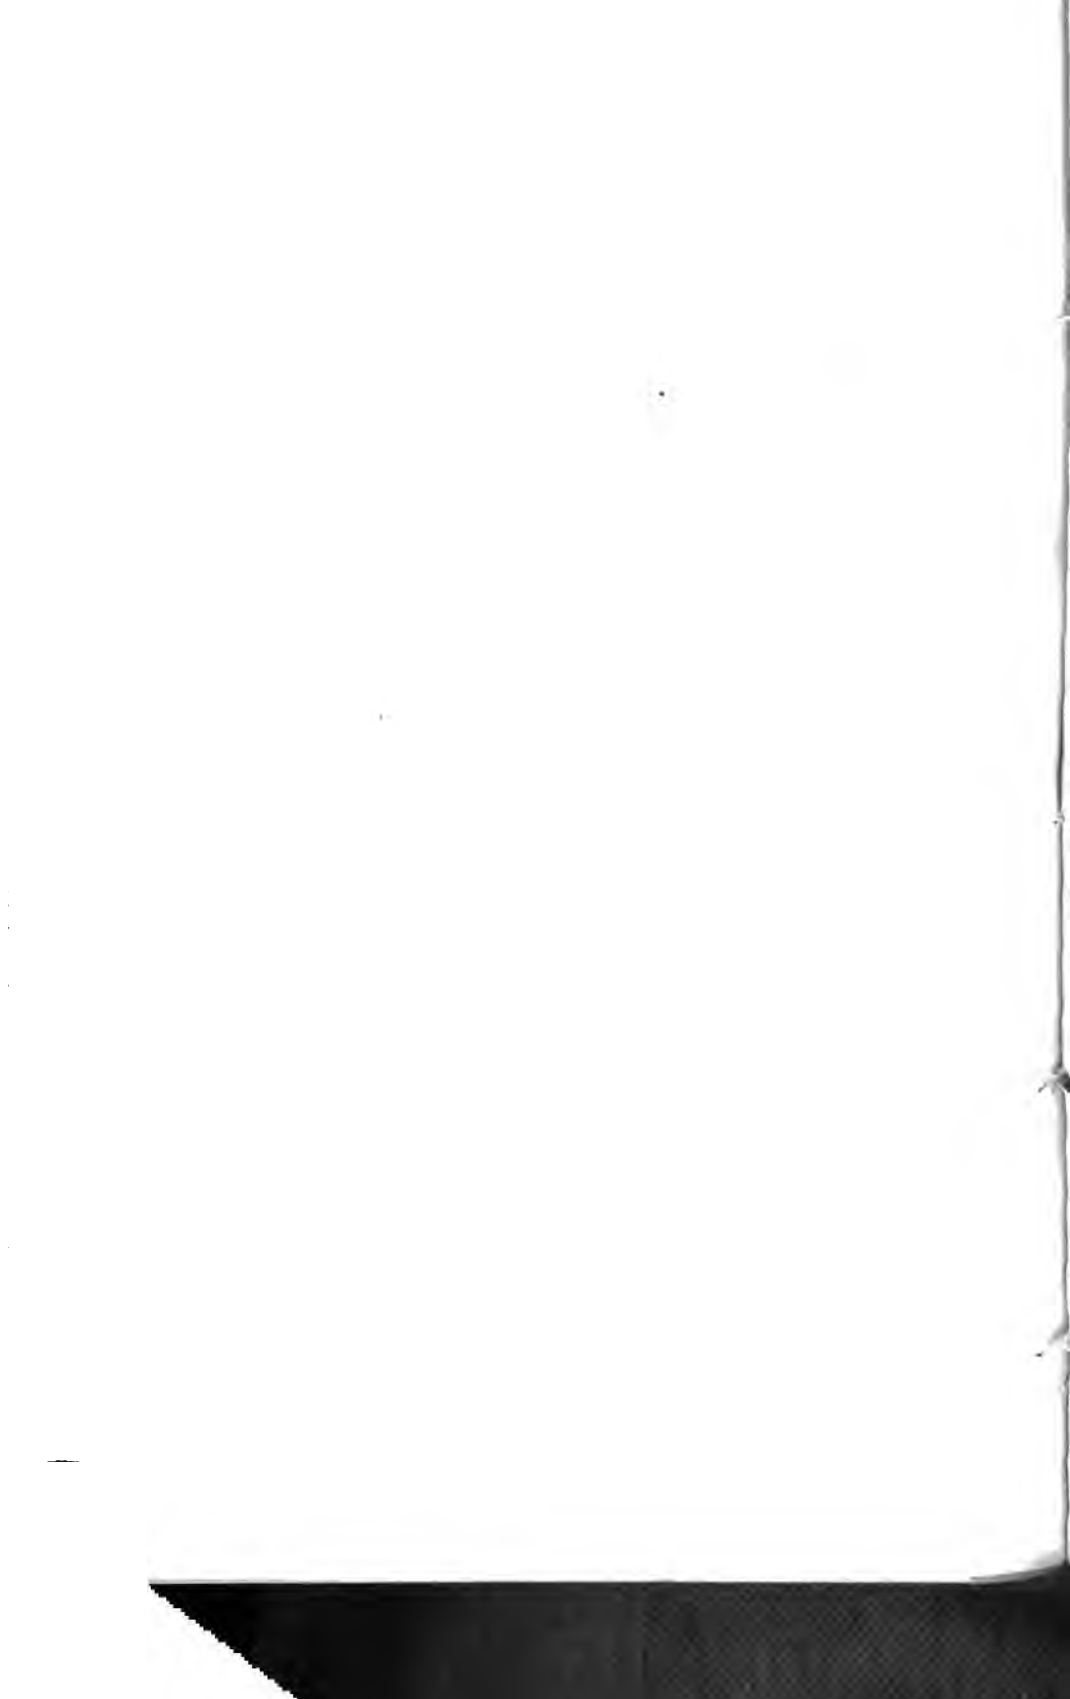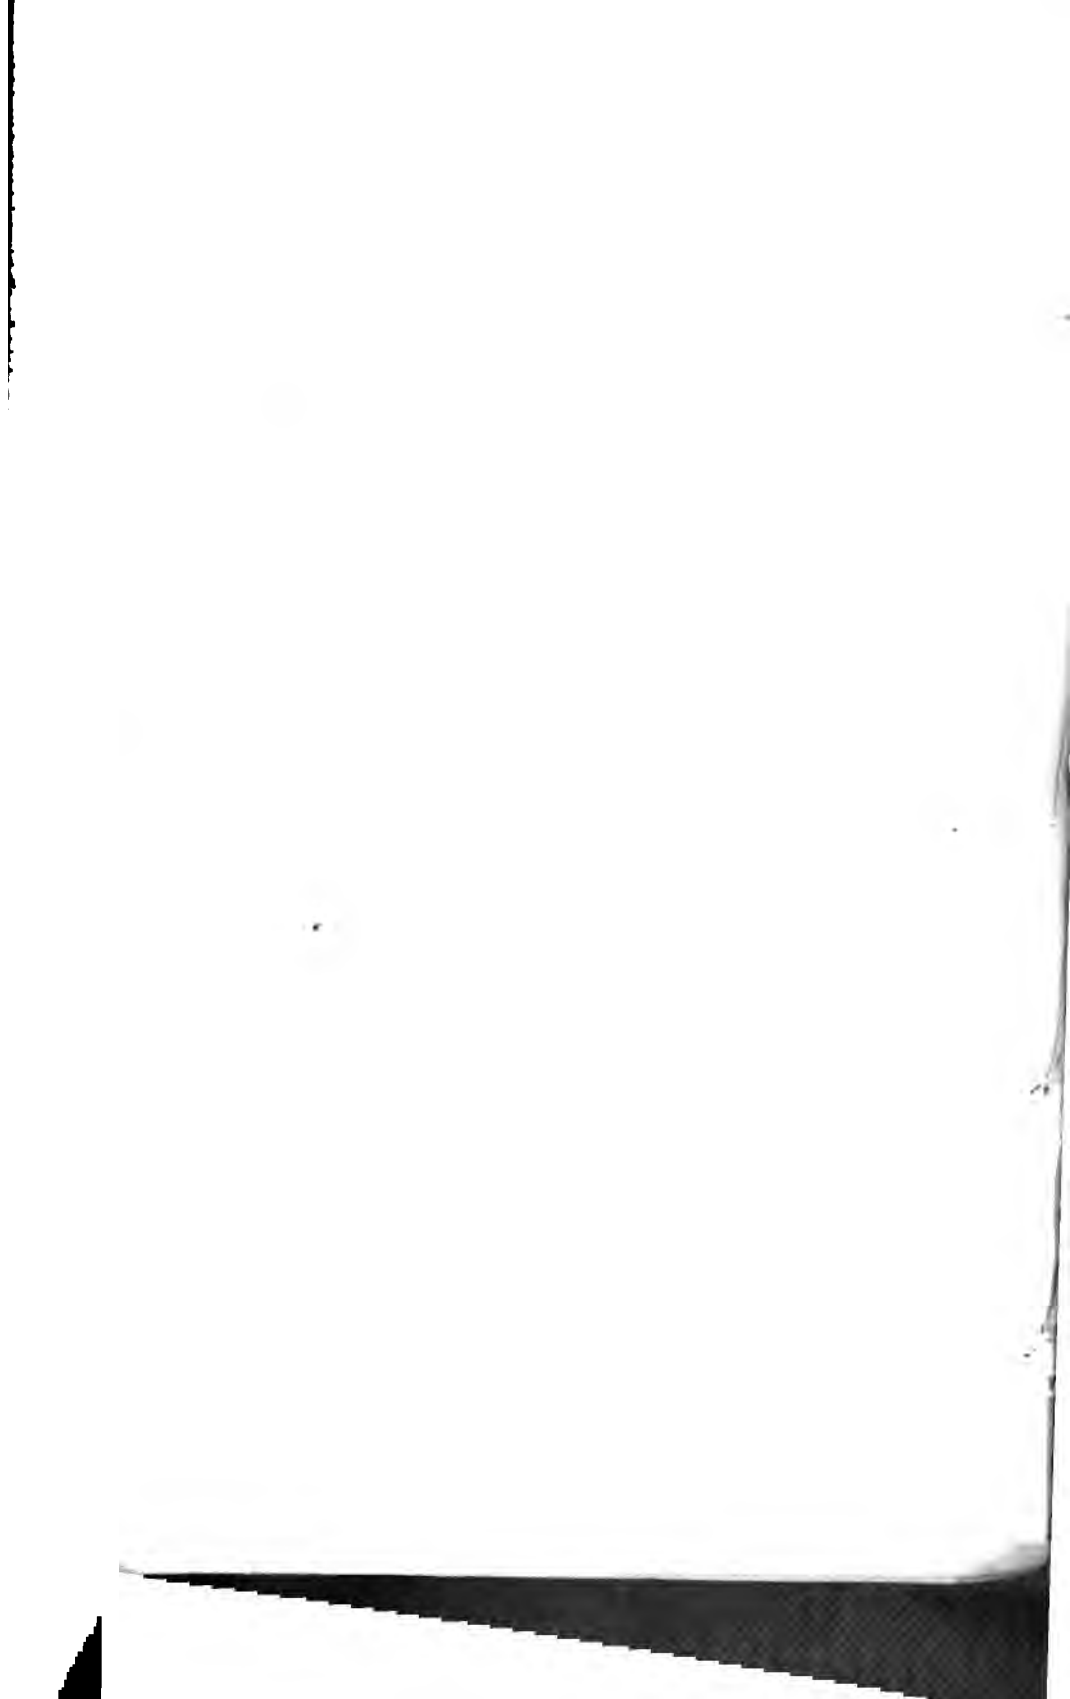
*The maximum is*








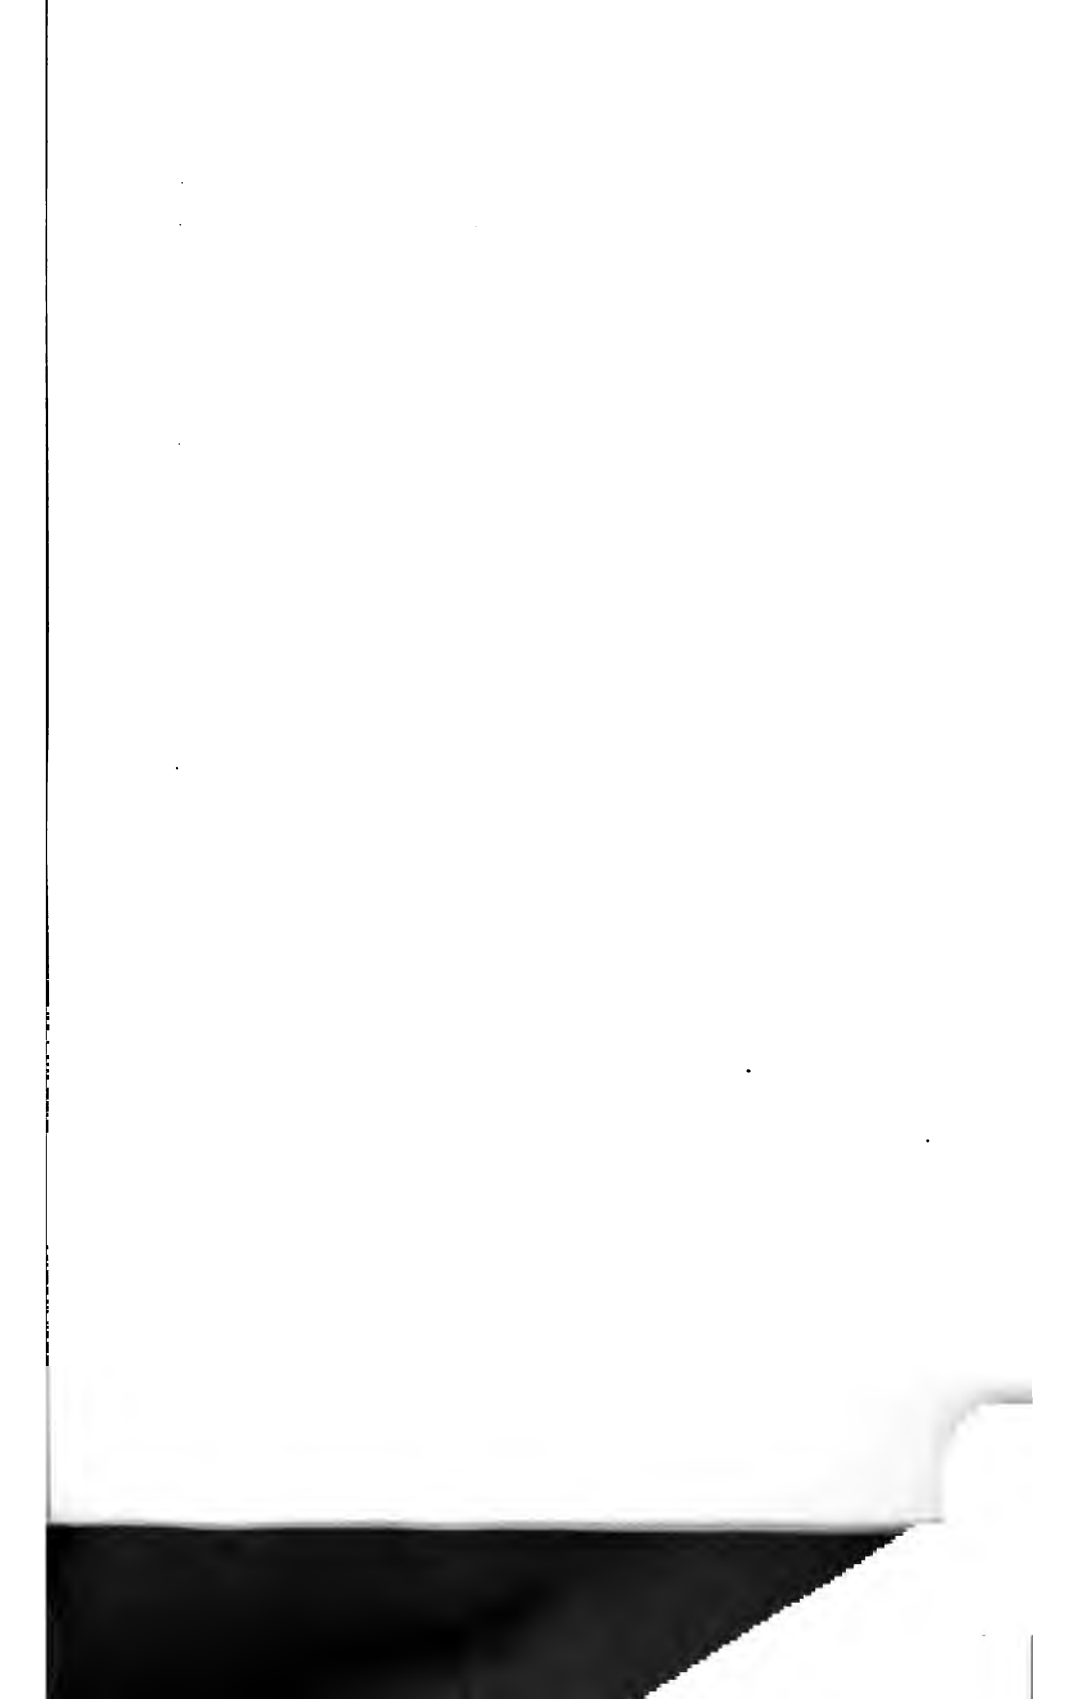



































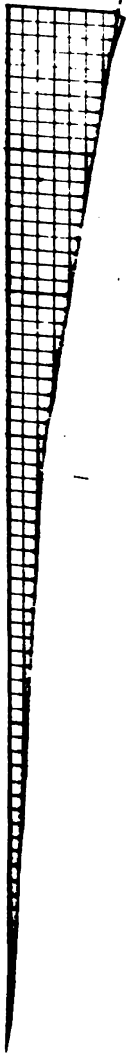


































CEMENT AND MORTAR CUBES.

COMPARATIVE TESTS ON MATERIAL SET IN AIR AND IN WATER.

The comparison of strength herewith made is between 2" cubes of the same batch, one-half the number of specimens made having been set in air and one-half set in water.  
 A number of cubes of larger sizes were made of some brands.

The 2" cubes were tested between flat steel platfoms, one side of one platform having a spherical face to assist in the adjustment of the specimen in the testing machine. The radius of curvature of this face was 2 1/4". This platform was allowed to accommodate itself, bearing against a flat seat, and follow any yielding of the material.  
 The cubes of larger size than 2" were tested between platfoms having a ball and socket adjustment, which were locked in position at the commencement of each test after adjustment had been effected.

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, EXCEPTING THE FIRST DAY AFTER MIXING, WHICH WAS IN AIR.

Brand of cement.	Composition.		Age in—		Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur-face.		Total.	Per square inch.	Mean.	
Atlas .....	1	1	Per ct. 82.0	Days 7	Days	Inches	Inches	Sq. inches.	Pounds.	Pounds.	Pounds.	
					2.02	2.04	2.04	4.22	9,510	2,250	.....	
					2.06	2.06	2.05	4.10	11,940	2,920	.....	
					2.04	2.04	2.03	4.14	11,800	2,670	.....	
					2.02	2.01	2.07	4.18	10,850	2,490	.....	
					2.04	2.06	2.04	4.18	10,200	2,440	2,540	
Do.....	1	1	82.0	1	2.04	2.04	2.05	4.28	11,420	2,670	.....	
					2.04	2.04	2.05	4.24	11,620	2,740	.....	
					2.00	2.00	2.03	4.20	9,480	2,260	.....	
					2.03	2.02	2.01	4.06	10,500	2,580	.....	
					2.02	2.06	2.06	4.24	11,100	2,620	2,580	
Do.....	1	1	82.0	80	2.09	2.09	2.04	4.26	13,500	3,170	.....	
					2.03	2.06	2.05	4.22	11,800	2,900	.....	
					1.94	2.07	2.05	4.24	13,250	3,180	.....	
					2.01	2.02	2.05	4.14	13,400	3,240	.....	
					2.03	2.04	2.04	4.10	11,200	2,660	8,010	Defective corner.

Do.....	1	1	82.0	1	29	2.04	2.04	2.02	4.12	12,500	8,090
.....	.....	.....	.....	.....	.....	2.05	2.04	2.03	4.14	13,900	8,290
.....	.....	.....	.....	.....	.....	2.02	2.04	2.01	4.10	13,200	8,270
.....	.....	.....	.....	.....	.....	2.03	2.04	2.04	4.16	13,800	8,240
.....	.....	.....	.....	.....	.....	2.08	2.04	2.04	4.18	16,000	8,610
Do.....	1	1	82.0	92	.....	2.10	1.99	2.07	4.12	14,980	8,640
.....	.....	.....	.....	.....	.....	2.04	2.09	2.08	4.35	14,050	8,280
.....	.....	.....	.....	.....	.....	2.06	2.01	2.01	4.04	12,420	8,080
.....	.....	.....	.....	.....	.....	2.04	2.05	2.04	4.20	13,800	8,170
.....	.....	.....	.....	.....	.....	2.01	2.09	1.99	4.16	15,900	8,820
Do.....	1	1	82.0	1	91	2.06	2.08	2.02	4.10	20,400	4,980
.....	.....	.....	.....	.....	.....	2.01	2.02	2.05	4.14	19,100	4,610
.....	.....	.....	.....	.....	.....	2.03	2.06	2.03	4.18	23,500	5,620
.....	.....	.....	.....	.....	.....	2.04	2.01	2.04	4.10	17,700	4,820
.....	.....	.....	.....	.....	.....	2.10	1.94	2.03	8.94	12,700	8,220
Do.....	1	1	82.0	98	.....	3.08	3.02	3.08	9.30	42,400	4,560
.....	.....	.....	.....	.....	.....	3.03	3.04	3.03	9.21	36,900	4,010
.....	.....	.....	.....	.....	.....	3.02	3.01	3.04	9.15	38,200	4,170
.....	.....	.....	.....	.....	.....	3.08	3.02	3.03	9.15	35,900	8,920
.....	.....	.....	.....	.....	.....	3.08	3.02	3.04	9.18	35,200	8,880
Do.....	1	1	82.0	1	92	3.08	3.02	3.08	9.30	67,500	7,280
.....	.....	.....	.....	.....	.....	3.02	3.00	3.07	9.21	68,200	6,860
.....	.....	.....	.....	.....	.....	3.01	3.07	3.07	9.42	68,500	6,210
.....	.....	.....	.....	.....	.....	3.02	3.04	3.10	9.42	56,200	5,970
.....	.....	.....	.....	.....	.....	3.05	3.02	3.03	9.15	60,700	6,680
Do.....	1	1	83.7	92	.....	3.99	4.07	4.00	16.28	59,100	8,680
.....	.....	.....	.....	.....	.....	4.08	4.00	4.00	16.00	55,600	8,480
Do.....	1	1	83.7	1	91	4.11	4.02	4.05	16.82	69,800	4,280
.....	.....	.....	.....	.....	.....	4.07	4.02	4.02	16.16	92,400	6,720
Do.....	1	1	83.7	92	.....	5.98	6.06	6.03	36.54	187,000	8,750
.....	.....	.....	.....	.....	.....	6.02	6.01	5.97	35.88	138,400	8,860
Do.....	1	1	83.7	1	91	6.09	5.99	6.04	36.18	219,900	6,080
.....	.....	.....	.....	.....	.....	6.06	6.09	6.08	36.72	190,800	6,180
Do.....	1	1	82.0	183	.....	2.02	2.02	2.08	4.16	15,200	8,650
.....	.....	.....	.....	.....	.....	2.08	2.11	2.02	4.25	13,800	8,170
.....	.....	.....	.....	.....	.....	2.03	2.09	2.03	4.21	13,600	8,160
.....	.....	.....	.....	.....	.....	2.00	2.01	2.08	4.18	13,400	8,680
.....	.....	.....	.....	.....	.....	2.00	1.99	2.04	4.08	13,000	8,200
Do.....	1	1	82.0	1	182	2.06	2.06	2.04	4.18	19,300	4,620
.....	.....	.....	.....	.....	.....	2.07	1.96	2.07	4.06	18,300	4,510
.....	.....	.....	.....	.....	.....	2.03	2.02	2.00	4.04	19,400	4,800
.....	.....	.....	.....	.....	.....	2.04	2.01	2.04	4.10	21,100	5,150
.....	.....	.....	.....	.....	.....	2.08	2.01	2.08	4.18	20,600	4,980

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—		Dimensions.			Sec-tional area. <i>Sq. inches.</i>	Compressive strength.			Remarks.
	Ce-ment.	Sand.	Water.	Air.	Water.	Height. <i>Inches.</i>	Compressed sur-face.			Total. <i>Pounds.</i>	Per square inch.	Mean. <i>Pounds.</i>	
							<i>Per ct.</i>	<i>Days.</i>					
Lehigh	Neat.		27.0	31		2.00	2.04	1.96	22,400	5,600	5,600		
						2.01	2.04	2.01	20,100	4,860	4,860		
						2.01	2.03	2.03	16,400	3,860	3,860		
						1.98	2.04	1.99	18,500	4,560	4,560		
						1.92	2.02	2.05	15,300	3,700	3,700	4,540	
Do	Neat.		27.0	1	30	2.00	2.08	1.98	26,900	6,580	6,580		
						2.02	2.08	2.01	28,600	7,010	7,010		
						2.02	2.06	2.00	24,500	5,850	5,850		
						2.00	2.05	2.05	28,300	6,740	6,740		
						2.00	2.07	2.03	24,800	5,790	5,790	6,400	
Do	Neat.		27.0	92		2.00	2.05	2.04	16,900	4,040	4,040		
						1.99	2.06	2.01	19,100	4,640	4,640		
						1.90	2.04	2.03	16,800	3,940	3,940		
						2.01	2.02	2.06	23,700	5,700	5,700		
						1.99	2.02	2.00	16,500	4,080	4,080		
Do	Neat.		27.0	1	91	2.01	2.01	2.06	26,700	6,450	6,450		
						2.08	2.00	2.05	22,600	5,760	5,760		
						1.99	2.00	2.04	32,700	8,010	8,010		
						2.02	2.00	2.06	26,900	6,580	6,580		
						2.00	2.00	2.05	26,700	6,510	6,510	6,660	
Do	Neat.		27.0	91		3.14	3.00	3.02	49,600	5,470	5,470		
						3.00	3.08	3.04	53,800	5,680	5,680		
						3.00	3.07	3.01	51,700	5,600	5,600		
						3.00	3.08	3.05	46,800	5,060	5,060		
						3.10	3.00	3.04	47,400	5,200	5,200	6,400	
Do	Neat.		27.0	1	91	3.06	3.01	3.05	64,200	9,170	9,170		
						3.06	3.01	3.05	75,500	8,220	8,220		
						3.01	3.11	3.01	57,100	8,210	8,210		
						3.08	3.01	3.08	75,700	8,360	8,360		
						3.01	3.08	3.02	77,400	8,360	8,360	8,680	

Do.....	1	1	84.0	81	1.99	2.06	2.02	4.16	7.900	1.900	.....
.....	.....	.....	.....	.....	1.98	2.09	1.98	4.14	11,200	.....	.....
.....	.....	.....	.....	.....	1.99	2.14	1.97	4.22	10,900	2,580	.....
.....	.....	.....	.....	.....	2.03	2.05	2.01	4.12	11,200	2,720	.....
.....	.....	.....	.....	.....	2.08	2.05	1.99	4.08	10,700	2,620	2,510
Do.....	1	1	84.0	1	1.99	2.04	2.04	4.16	15,400	8,700	.....
.....	.....	.....	.....	.....	2.04	2.06	2.04	4.20	18,800	4,860	.....
.....	.....	.....	.....	.....	2.02	2.08	2.08	4.18	15,700	3,780	.....
.....	.....	.....	.....	.....	2.00	2.09	2.08	4.24	19,000	4,480	.....
.....	.....	.....	.....	.....	2.01	2.06	2.01	4.18	14,800	3,540	3,970
Do.....	1	1	84.0	91	2.05	1.90	2.05	3.90	9,400	2,410	.....
.....	.....	.....	.....	.....	1.99	2.00	2.12	4.24	10,300	2,480	.....
.....	.....	.....	.....	.....	1.99	1.97	2.11	4.16	10,900	2,620	.....
.....	.....	.....	.....	.....	2.02	2.00	2.06	4.16	10,500	2,520	.....
.....	.....	.....	.....	.....	2.08	2.01	2.06	4.14	12,100	2,920	2,580
Do.....	1	1	84.0	1	2.08	2.04	2.05	4.18	21,400	5,120	.....
.....	.....	.....	.....	.....	2.00	2.05	2.09	4.28	20,100	4,700	.....
.....	.....	.....	.....	.....	2.01	2.00	2.06	4.12	20,600	5,000	.....
.....	.....	.....	.....	.....	1.99	2.08	2.06	4.18	19,600	4,690	.....
.....	.....	.....	.....	.....	2.02	2.06	2.08	4.18	22,400	5,860	4,970
Do.....	1	1	84.0	90	3.00	3.09	3.08	9.36	28,400	3,080	.....
.....	.....	.....	.....	.....	3.04	3.01	3.12	9.39	32,100	3,420	3,230
.....	.....	.....	.....	.....	3.09	3.02	3.08	9.80	47,600	5,120	.....
.....	.....	.....	.....	.....	3.10	3.00	3.09	9.27	36,400	5,760	5,440
Peninsular.....	Neat.	.....	25.5	7	2.05	1.98	2.02	4.00	20,500	5,180	.....
.....	.....	.....	.....	.....	2.04	1.99	2.00	3.98	21,700	5,130	.....
.....	.....	.....	.....	.....	2.04	1.98	1.96	3.94	18,700	4,750	.....
.....	.....	.....	.....	.....	2.08	1.98	2.04	3.90	18,200	4,500	.....
.....	.....	.....	.....	.....	2.05	2.02	1.98	3.90	20,600	5,280	4,970
Do.....	Neat.	.....	25.5	1	1.92	2.06	2.06	4.24	25,500	6,010	.....
.....	.....	.....	.....	.....	2.08	1.97	2.01	4.06	23,200	5,710	.....
.....	.....	.....	.....	.....	2.06	1.99	2.01	4.00	28,200	7,100	.....
.....	.....	.....	.....	.....	2.08	1.97	2.06	4.06	26,800	6,480	.....
.....	.....	.....	.....	.....	2.06	1.98	2.05	4.06	24,300	5,990	6,230
Do.....	Neat.	.....	25.5	30	2.08	1.99	2.08	4.04	29,500	7,300	.....
.....	.....	.....	.....	.....	1.99	2.04	2.08	4.14	28,400	5,650	.....
.....	.....	.....	.....	.....	2.02	1.96	2.02	4.00	22,000	5,500	.....
.....	.....	.....	.....	.....	2.02	1.99	2.04	4.06	24,900	6,130	.....
.....	.....	.....	.....	.....	2.00	1.99	2.08	4.04	24,800	6,140	6,140
Do.....	Neat.	.....	25.5	1	1.99	2.01	2.06	4.14	29,400	7,100	.....
.....	.....	.....	.....	.....	2.04	1.97	2.01	3.96	33,400	8,480	.....
.....	.....	.....	.....	.....	2.05	1.97	2.01	3.96	40,700	10,280	.....
.....	.....	.....	.....	.....	2.04	1.98	2.06	4.06	31,500	7,720	.....
.....	.....	.....	.....	.....	2.04	1.98	2.06	4.06	31,500	7,720	8,870
.....	.....	.....	.....	.....	2.04	1.98	2.00	3.96	42,900	10,880	.....

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—		Dimensions.			Sectional area.	Compressive strength.			Remarks.										
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur- face.			Total.	Per square inch.	Mean.											
							Inches.	Inches.															
Peninsular	Neat.	.....	Per cent. 25.5	.....	Days. 92	.....	2.05	2.01	1.99	Sq. inches 4.00	Pounds 24,400	Pounds 6,100	.....										
														Do.	Neat.	.....	2.00	2.05	1.98	4.06	28,400	5,760	6,080
Do.	Neat.	.....	25.5	91	.....	2.05	2.07	1.99	4.12	37,400	9,080	.....											
													Do.	Neat.	.....	1.98	2.06	4.14	40,800	9,860	.....		
																						Do.	Neat.
Do.	Neat.	.....	25.5	94	.....	3.02	3.02	3.03	9.15	81,800	8,940	.....											
													Do.	Neat.	.....	3.01	3.06	8.01	77,900	8,400	8,670		
																						Do.	Neat.
Do.	Neat.	.....	25.5	91	.....	3.03	3.05	3.01	9.18	120,200	13,090	.....											
													Do.	Neat.	.....	3.06	3.03	8.00	112,600	12,390	12,550		
																						Do.	Neat.
Do.	Neat.	.....	25.5	94	.....	4.08	4.08	4.08	16.24	136,000	8,370	.....											
													Do.	Neat.	.....	3.99	4.00	16.32	131,000	11,090	11,420		
																						Do.	Neat.
Do.	Neat.	.....	25.5	96	.....	6.04	6.00	6.00	86.24	284,200	7,290	.....											
													Do.	Neat.	.....	6.02	6.06	36.36	237,400	7,900	7,985		
																						Do.	Neat.
Do.	1	.....	84.2	7	.....	2.01	2.02	2.05	4.14	13,400	3,240	.....											
													Do.	Neat.	.....	2.08	1.99	4.00	11,400	2,850	.....		
																						Do.	Neat.
Do.	1	.....	84.2	1	6	.....	1.96	2.04	4.04	12,600	3,120	.....											
													Do.	Neat.	.....	1.99	2.01	4.06	11,800	2,850	2,850		
																						Do.	Neat.
Do.	1	.....	84.2	1	6	.....	2.04	2.04	4.04	10,600	2,610	.....											
													Do.	Neat.	.....	2.01	1.99	4.06	13,700	3,310	.....		
																						Do.	Neat.
Do.	1	.....	84.2	1	6	.....	2.03	2.03	4.14	11,600	2,800	2,880											
													Do.	Neat.	.....	2.06	2.06	4.14	11,600	2,800	.....		
																						Do.	Neat.

Do.....	1	1	34.2	30	.....	2.05	2.01	2.00	4.02	12,700	8,160	.....
Do.....	1	1	34.2	1	29	1.99	1.99	2.06	4.10	13,500	8,240	.....
Do.....	1	1	34.2	1	.....	2.09	1.99	2.03	4.04	16,100	8,400	.....
Do.....	1	1	34.2	1	.....	2.02	1.99	2.07	4.12	18,500	4,490	.....
Do.....	1	1	34.2	1	.....	2.05	2.01	2.04	4.10	17,900	4,370	.....
Do.....	1	1	34.2	1	.....	2.01	1.96	2.03	3.96	21,500	5,450	.....
Do.....	1	1	34.2	1	.....	2.01	2.00	2.07	4.14	19,500	4,710	.....
Do.....	1	1	34.2	1	.....	2.01	2.01	2.06	4.14	18,200	4,400	4,680
Do.....	1	1	34.2	92	.....	2.04	2.01	2.01	4.04	12,100	8,000	.....
Do.....	1	1	34.2	94	.....	2.01	2.03	2.01	4.08	15,600	8,410	.....
Do.....	1	1	34.2	94	.....	3.00	3.02	3.00	9.06	51,500	5,690	.....
Do.....	1	1	34.2	94	.....	3.07	3.00	3.03	9.09	45,100	4,960	5,820
Do.....	1	1	34.2	8	91	3.01	3.03	3.09	9.96	67,200	7,183	.....
Do.....	1	1	34.2	8	91	3.01	3.03	3.06	9.18	73,100	7,960	.....
Do.....	1	1	34.2	94	.....	4.08	3.98	3.98	15.64	76,900	4,920	.....
Do.....	1	1	34.2	94	.....	4.13	4.00	3.89	15.56	79,900	5,130	5,025
Do.....	1	1	34.2	8	91	3.96	4.06	3.97	16.12	134,500	8,340	.....
Do.....	1	1	34.2	96	.....	4.06	3.96	3.96	15.76	117,400	7,450	7,886
Do.....	1	1	34.2	96	.....	6.01	6.07	5.92	35.28	204,500	5,800	5,775
Do.....	1	1	34.2	5	91	6.03	6.00	6.03	36.18	308,400	8,520	8,440
Do.....	1	1	34.2	5	91	6.03	6.00	6.00	36.00	301,000	8,360	8,440
Do.....	1	2	48.1	7	.....	2.06	2.04	2.04	4.16	5,220	1,250	.....
Do.....	1	2	48.1	7	.....	2.06	2.02	2.03	4.10	5,800	1,290	.....
Do.....	1	2	48.1	7	.....	2.06	2.01	2.04	4.10	6,850	1,550	.....
Do.....	1	2	48.1	7	.....	2.01	2.02	2.01	4.06	5,810	1,430	.....
Do.....	1	2	48.1	7	.....	2.01	2.08	2.06	4.18	5,660	1,350	1,370
Do.....	1	2	48.1	1	6	2.05	2.04	2.01	4.10	5,500	1,840	.....
Do.....	1	2	48.1	1	6	2.06	2.04	2.01	4.10	5,720	1,400	.....
Do.....	1	2	48.1	1	6	2.03	1.96	2.04	4.06	7,480	1,840	.....
Do.....	1	2	48.1	1	6	2.08	2.02	2.04	4.12	5,430	1,320	.....
Do.....	1	2	48.1	1	6	2.08	2.04	2.06	4.24	5,500	1,300	1,440
Do.....	1	2	48.1	30	.....	2.04	2.01	2.01	4.04	5,350	1,820	.....
Do.....	1	2	48.1	30	.....	2.00	2.01	2.01	4.06	6,450	1,660	.....
Do.....	1	2	48.1	30	.....	1.99	2.02	2.03	4.10	5,900	1,410	.....
Do.....	1	2	48.1	30	.....	2.04	2.01	2.08	4.06	6,700	1,640	.....
Do.....	1	2	48.1	30	.....	2.06	2.02	2.08	4.10	6,060	1,480	1,490
Do.....	1	2	48.1	1	29	2.08	2.06	2.08	4.16	9,750	2,840	.....
Do.....	1	2	48.1	1	29	2.01	2.08	2.05	4.16	11,420	2,750	.....
Do.....	1	2	48.1	1	29	2.04	2.06	2.05	4.22	11,510	2,730	.....
Do.....	1	2	48.1	1	29	2.01	2.02	2.02	4.08	12,000	2,940	.....
Do.....	1	2	48.1	1	29	2.01	2.02	2.01	4.06	12,060	2,970	2,750

1 day in air before and 2 days in air after interval in water.

Do.

1 day in air before and 4 days in air after interval in water.





Do.....	1	3	68.0	101	.....	6.00	6.02	6.12	37.08	65,200	1,760	.....	1,765
Do.....	1	8	68.0	5	96	6.06	6.04	6.07	36.54	64,100	1,760	.....	1,765
Do.....	1	4	87.0	7	.....	6.07	6.04	6.10	36.84	105,400	2,890	.....	2,975
Do.....	1	4	87.0	1	6	2.00	2.00	2.08	4.06	1,960	490	.....	490
Do.....	1	4	87.0	1	6	2.02	2.02	2.02	4.06	1,800	440	.....	440
Do.....	1	4	87.0	1	6	1.97	2.02	2.02	4.06	1,870	458	.....	458
Do.....	1	4	87.0	1	6	2.04	2.02	2.08	4.10	2,810	560	.....	560
Do.....	1	4	87.0	1	6	2.02	2.08	2.08	4.12	1,760	425	.....	478
Do.....	1	4	87.0	1	6	2.05	1.99	2.06	4.10	2,420	590	.....	590
Do.....	1	4	87.0	1	6	2.01	2.08	2.02	4.16	2,290	550	.....	550
Do.....	1	4	87.0	1	6	2.01	2.08	2.06	4.18	2,270	548	.....	548
Do.....	1	4	87.0	1	6	1.96	2.04	2.04	4.16	2,190	528	.....	528
Do.....	1	4	87.0	1	6	2.02	1.99	2.02	4.02	2,810	575	.....	557
Do.....	1	4	87.0	30	.....	2.02	2.06	2.00	4.10	2,290	566	.....	566
Do.....	1	4	87.0	1	29	2.02	2.02	2.06	4.16	3,060	788	.....	788
Do.....	1	4	87.0	1	29	1.99	2.06	2.04	4.18	2,410	577	.....	577
Do.....	1	4	87.0	1	29	2.02	2.06	1.99	4.10	2,860	702	.....	702
Do.....	1	4	87.0	1	29	2.01	2.02	2.02	4.08	2,910	718	.....	686
Do.....	1	4	87.0	1	29	2.06	2.04	2.06	4.18	4,140	990	.....	990
Do.....	1	4	87.0	1	29	2.02	2.06	2.04	4.10	3,680	898	.....	898
Do.....	1	4	87.0	1	29	2.08	2.02	2.04	4.12	4,280	1,040	.....	1,040
Do.....	1	4	87.0	1	29	2.01	2.07	2.01	4.16	3,680	878	.....	900
Do.....	1	4	87.0	100	.....	3.06	3.01	3.06	9.21	10,500	1,140	.....	1,140
Do.....	1	4	87.0	100	.....	3.01	3.08	3.06	9.21	7,900	832	.....	832
Do.....	1	4	87.0	100	.....	3.01	3.01	3.06	9.21	8,300	891	.....	891
Do.....	1	4	87.0	100	.....	3.02	3.02	3.02	9.21	9,200	1,010	.....	1,010
Do.....	1	4	87.0	100	.....	3.02	3.04	3.06	9.20	11,600	1,260	.....	1,080
Do.....	1	4	87.0	5	96	3.01	3.07	3.06	9.46	17,400	1,840	.....	1,840
Do.....	1	4	87.0	5	96	3.01	3.06	3.10	9.46	19,600	2,070	.....	2,070
Do.....	1	4	87.0	5	96	3.02	3.02	3.12	9.42	17,900	1,900	.....	1,900
Do.....	1	4	87.0	5	96	3.01	3.02	3.12	9.42	17,800	1,844	.....	1,844
Do.....	1	4	87.0	5	96	3.01	3.06	3.11	9.49	21,000	2,210	.....	1,970
Do.....	1	4	87.0	100	.....	3.99	4.06	4.00	16.24	18,900	1,160	.....	1,160
Do.....	1	4	87.0	100	.....	4.00	4.06	3.99	16.26	19,500	1,200	.....	1,180
Do.....	1	4	87.0	5	96	4.00	4.07	4.08	16.40	32,300	1,970	.....	1,970
Do.....	1	4	87.0	5	96	4.00	4.02	4.01	16.12	33,400	2,070	.....	2,020
Do.....	1	4	87.0	100	.....	6.04	6.01	6.00	36.06	41,000	1,140	.....	1,140
Do.....	1	4	87.0	100	.....	6.08	6.08	6.12	36.90	43,300	1,170	.....	1,155
Do.....	1	4	87.0	5	96	6.05	6.02	6.06	36.60	58,200	1,450	.....	1,450
Do.....	1	4	87.0	5	96	6.96	6.09	6.10	37.15	56,800	1,580	.....	1,490

1 day in air before and 4 days in air after interval in water.

Do.

Do.

Do.

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—			Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur-face.		Total.		Per square inch.	Mean.		
							Inches.	Inches.						
Cathedral	Neat	28.8	28.8	7	Days.	Inches.	2.01	2.00	2.03	Sq. inches.	4.06	Pounds.	9,400	Pounds.
													7,910	
													7,800	
													8,080	
													9,070	
Do.	Neat.	28.8	1	6	Days.	Inches.	2.02	2.08	2.08	Sq. inches.	4.18	Pounds.	8,980	Pounds.
													7,880	
													7,280	
													7,540	
													1,900	
Do.	Neat.	28.8	33	Days.	Inches.	1.98	2.04	2.03	2.01	Sq. inches.	4.08	Pounds.	10,850	Pounds.
													10,400	
													2,560	
													2,670	
													2,590	
Do.	Neat.	28.8	1	32	Days.	Inches.	2.01	2.05	2.01	Sq. inches.	4.12	Pounds.	10,000	Pounds.
													9,980	
													2,420	
													2,880	
													2,690	
Do.	Neat.	28.8	92	Days.	Inches.	2.01	2.00	2.02	2.02	Sq. inches.	4.04	Pounds.	11,900	Pounds.
													11,300	
													2,800	
													2,850	
													3,080	
Do.	Neat.	28.8	1	91	Days.	Inches.	2.05	1.92	2.02	Sq. inches.	3.88	Pounds.	9,800	Pounds.
													2,530	
													2,840	
													3,110	
													3,890	
Do.	Neat.	28.8	98	Days.	Inches.	3.02	3.02	3.06	3.06	Sq. inches.	9.24	Pounds.	28,400	Pounds.
													3,070	
													3,070	
													3,070	
													3,200	

1 day in air before and 1 day in air  
after interval in water.

Do.....	Neat.....	28.8	2	91	3.05	3.02	8.09	9.33	30,900	8,310	3,845
Do.....	1	36.6	7	.....	3.02	3.06	8.10	9.46	32,000	8,380	.....
Do.....	1	36.6	4	8	2.01	2.04	2.05	4.18	5,850	1,400	.....
Do.....	1	36.6	4	.....	2.04	2.01	2.02	4.12	5,520	1,340	.....
Do.....	1	36.6	4	.....	2.06	2.06	2.04	4.06	5,560	1,370	.....
Do.....	1	36.6	4	.....	2.02	2.07	1.99	4.12	4,920	1,190	.....
Do.....	1	36.6	4	.....	2.00	2.02	2.06	4.16	6,020	1,450	1,850
Do.....	1	36.6	4	.....	2.04	2.02	1.98	3.90	5,800	1,860	.....
Do.....	1	36.6	4	.....	2.01	2.01	2.01	3.92	5,450	1,890	.....
Do.....	1	36.6	4	.....	2.05	2.06	2.04	4.14	5,910	1,430	.....
Do.....	1	36.6	4	.....	2.01	2.04	2.04	4.16	4,910	1,180	.....
Do.....	1	36.6	4	.....	2.01	2.04	2.01	4.10	5,540	1,350	1,840
Do.....	1	36.6	32	.....	1.99	2.00	2.00	4.00	8,800	2,200	.....
Do.....	1	36.6	4	28	2.03	2.02	2.00	4.04	8,100	2,000	.....
Do.....	1	36.6	4	.....	2.02	2.01	2.02	4.06	9,100	2,240	.....
Do.....	1	36.6	4	.....	2.01	2.00	1.98	3.96	8,800	2,100	.....
Do.....	1	36.6	4	.....	2.05	2.00	2.02	4.04	8,700	2,150	2,140
Do.....	1	36.6	4	.....	1.92	2.08	2.06	4.18	8,500	2,030	.....
Do.....	1	36.6	4	.....	2.04	2.03	1.92	3.90	9,100	2,830	.....
Do.....	1	36.6	4	.....	2.00	2.04	2.02	4.12	9,000	2,180	.....
Do.....	1	36.6	4	.....	2.04	2.04	1.95	3.98	8,500	2,140	.....
Do.....	1	36.6	4	.....	2.05	2.06	2.01	4.12	8,200	1,990	2,180
Do.....	1	36.6	92	.....	1.96	2.00	2.00	4.00	7,600	1,900	.....
Do.....	1	36.6	1	91	2.02	2.04	2.08	4.14	9,400	2,270	.....
Do.....	1	36.6	1	.....	2.02	2.09	2.02	4.22	10,700	2,540	.....
Do.....	1	36.6	1	.....	2.01	2.02	2.02	4.08	9,000	2,270	.....
Do.....	1	36.6	1	.....	2.08	2.04	2.02	4.12	8,400	2,040	2,180
Do.....	1	36.6	1	.....	2.00	2.06	2.05	4.22	10,200	2,420	.....
Do.....	1	36.6	1	.....	2.03	2.07	2.04	4.10	9,800	2,890	.....
Do.....	1	36.6	1	.....	2.00	2.00	2.04	4.22	10,050	2,880	.....
Do.....	1	36.6	1	.....	2.08	2.06	2.02	4.06	10,600	2,600	.....
Do.....	1	36.6	92	.....	3.02	3.08	3.06	4.11	9,800	2,250	2,410
Do.....	1	36.6	1	.....	3.02	3.08	3.06	9.27	22,900	2,470	2,470
Do.....	1	36.6	1	91	3.02	3.08	3.04	9.21	25,400	2,760	2,760
Do.....	1	36.6	7	.....	2.04	2.06	2.01	4.13	8,310	792	.....
Do.....	1	36.6	7	.....	2.01	2.10	2.02	4.28	8,260	763	.....
Do.....	1	36.6	7	.....	1.91	2.04	2.06	4.18	2,830	677	.....
Do.....	1	36.6	7	.....	2.01	2.06	2.08	4.16	8,160	760	.....
Do.....	1	36.6	7	.....	2.01	2.06	2.08	4.18	2,500	598	718

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement	Composition.			Age in—		Dimensions.			Compressive strength.			Remarks.	
	Ce-ment	Sand.	Water.	Air.	Water.	Height.	Compressed sur- face.		Sec- tional area.	Total.	Per square inch.		Mean.
							Inches.	Inches.					
Cathedral	1	2	Per ct.		Days.	Days.	2.04	2.10	2.02	4.24	Pounds.	Pounds.	
							2.02	2.04	2.02	4.08	788	788	
							1.98	2.04	2.00	4.08	3,680	3,680	
							2.02	2.06	2.00	4.16	2,600	2,600	
							1.99	2.09	2.01	4.20	2,900	2,900	
Do.	1	2		80		1.99	2.08	2.02	4.20	4,900	1,020	1,020	
						2.00	2.04	2.02	4.12	3,750	910	910	
						1.99	2.04	2.00	4.08	2,900	711	711	
						1.99	2.09	2.00	4.12	2,700	655	655	
						2.02	2.06	2.00	4.10	3,220	788	788	
Do.	1	2		28		2.01	2.08	2.01	4.18	4,200	1,000	1,000	
						2.02	2.01	2.01	4.10	4,200	1,220	1,220	
						2.01	2.04	2.04	4.20	4,800	1,080	1,080	
						2.02	2.07	2.03	4.20	4,850	1,040	1,040	
						2.00	2.07	2.03	4.20	4,680	1,100	1,100	
Do.	1	2		98		2.02	2.04	2.03	4.14	2,900	700	700	
						2.03	2.04	2.04	4.16	3,400	817	817	
						2.01	2.01	2.04	4.10	4,850	1,180	1,180	
						2.00	2.01	2.05	4.12	3,200	777	777	
						2.00	1.97	2.01	3.96	3,100	788	788	
Do.	1	2		92		2.05	2.02	2.03	4.10	5,400	1,320	1,320	
						2.04	2.06	2.06	4.18	5,200	1,240	1,240	
						2.04	2.06	2.07	4.26	5,500	1,280	1,280	
						2.00	2.03	2.05	4.16	5,500	1,320	1,320	
						2.06	2.01	2.07	4.16	6,000	1,440	1,440	
Do.	1	3	63.3	7		1.95	2.06	1.98	4.08	1,390	341	341	
						2.04	2.02	2.02	4.08	1,620	397	397	
						2.00	2.02	2.04	4.12	1,100	267	267	
						2.00	2.08	2.00	4.16	1,450	349	349	
						2.04	2.03	2.00	4.06	1,300	320	320	

385

Do.....	1	8	63.3	1	6	1.97	2.08	1.98	4.12	1,480	347	
						2.07	2.01	2.01	4.16	1,150	378	
						1.99	1.99	1.98	3.94	1,470	348	
						2.04	2.05	1.99	4.06	1,010	248	
						2.02	2.06	1.99	4.10	1,020	249	297
Do.....	1	8	63.3	31		2.06	2.07	2.00	4.14	1,900	485	
						2.06	2.05	2.02	4.14	2,200	581	
						1.98	2.06	2.00	4.12	1,980	481	
						2.04	2.06	2.02	4.16	2,100	505	
						2.01	2.04	2.06	4.20	2,080	488	488
Do.....	1	8	63.3	1	30	1.96	2.06	2.02	4.16	1,900	457	
						2.05	2.05	1.98	3.96	2,000	505	
						2.00	2.10	2.00	4.20	1,920	457	
						2.03	2.02	2.00	4.04	1,980	480	
						2.01	2.06	2.00	4.12	1,900	461	472
Do.....	1	8	63.3	92		2.00	2.02	2.08	4.10	2,400	585	
						2.02	2.02	2.00	4.04	2,600	644	
						1.99	2.03	2.03	4.12	2,200	584	
						2.02	2.03	2.02	4.10	2,900	707	
						1.98	1.99	2.03	4.04	2,300	569	608
Do.....	1	8	63.3	1	91	2.00	2.02	2.08	4.10	2,100	512	
						2.02	2.00	2.04	4.08	2,500	613	
						2.02	2.01	2.03	4.08	3,300	809	
						2.01	2.07	2.02	4.13	2,400	574	
						2.06	1.96	2.00	3.90	2,400	615	625
Do.....	1	8	63.3	98		3.03	3.00	3.05	9.15	8,500	929	
						3.00	3.02	3.08	9.30	8,280	888	
						3.02	3.06	3.03	9.24	8,700	942	
						3.02	3.06	3.07	9.39	9,500	1,010	
						3.00	3.00	3.15	9.45	6,000	685	881
Do.....	1	8	63.3	2	91	3.01	3.06	3.07	9.46	9,600	1,010	
						3.10	3.00	3.06	9.13	8,800	969	
						3.02	3.07	3.08	9.46	9,100	982	
						3.00	3.01	3.13	9.48	8,640	911	
						3.01	3.06	3.06	9.36	8,500	908	960
Do.....	1	8	63.3	93		4.07	4.00	3.99	15.96	14,700	921	
Do.....	1	3	63.3	2	91	4.06	4.00	4.00	16.00	14,400	900	
						4.09	4.00	4.01	16.04	15,100	941	921
Do.....	1	3	63.3	2	91	2.00	2.09	2.01	4.20	7,000	1,670	
						2.06	2.09	2.04	4.26	6,620	1,540	
						2.01	2.03	1.98	4.16	6,700	1,610	
						2.01	2.08	1.98	4.14	7,170	1,730	
						1.97	2.08	1.98	4.12	7,400	1,800	1,670

1 day in air before and 1 day in air after interval in water.

Do.

Silica.....



Do.....	Neat.....	25.8	1	92	4.08	3.99	3.98	16.88	42,300	2,690	2,800
Do.....	1	32.0	6	.....	1.97	2.06	2.01	4.14	4,240	1,020	.....
Do.....	1	32.0	1	5	2.04	2.04	2.01	4.10	4,810	1,170	.....
Do.....	1	32.0	1	5	2.04	2.06	2.01	4.14	4,490	1,060	.....
Do.....	1	32.0	1	5	2.08	2.09	2.01	4.20	4,120	961	.....
Do.....	1	32.0	1	5	2.01	2.04	2.01	4.10	4,370	1,190	1,090
Do.....	1	32.0	32	.....	1.98	2.05	1.99	4.08	6,040	1,480	.....
Do.....	1	32.0	1	81	2.06	2.05	2.02	4.14	5,900	1,830	.....
Do.....	1	32.0	1	81	1.99	2.06	2.06	4.22	5,400	1,940	.....
Do.....	1	32.0	1	81	2.01	2.06	2.04	4.20	7,000	1,810	.....
Do.....	1	32.0	1	81	2.01	2.04	2.01	4.10	5,100	1,860	.....
Do.....	1	32.0	1	81	2.01	2.08	2.04	4.14	7,500	1,810	1,920
Do.....	1	32.0	92	.....	2.02	2.02	2.07	4.18	6,700	1,600	.....
Do.....	1	32.0	92	.....	1.98	2.05	2.05	4.18	7,100	1,700	.....
Do.....	1	32.0	92	.....	2.00	2.02	2.08	4.20	6,800	1,570	.....
Do.....	1	32.0	92	.....	2.00	2.06	2.01	4.10	6,800	1,680	.....
Do.....	1	32.0	92	.....	2.00	2.06	2.05	4.22	6,800	1,490	1,610
Do.....	1	32.0	1	91	2.00	2.02	2.06	4.18	9,800	2,240	.....
Do.....	1	32.0	1	91	2.00	2.00	2.06	4.12	10,100	2,450	.....
Do.....	1	32.0	1	91	2.01	2.02	2.08	4.20	10,300	2,450	.....
Do.....	1	32.0	1	91	1.90	2.05	2.07	4.24	9,300	2,190	.....
Do.....	1	32.0	1	91	2.00	2.01	2.12	4.28	10,100	2,370	2,940
Do.....	1	32.0	92	.....	3.04	3.02	3.10	9.36	13,200	1,410	.....
Do.....	1	32.0	92	.....	3.00	3.07	3.05	9.38	13,700	1,460	1,440
Do.....	1	32.0	1	91	3.02	3.05	3.11	9.49	27,400	2,990	2,990
Do.....	1	32.0	1	91	3.01	3.09	3.12	9.64	28,800	2,470	2,680
Do.....	1	44.0	5	.....	1.99	2.06	1.98	4.08	1,710	419	.....
Do.....	1	44.0	5	.....	2.08	2.05	1.98	4.06	1,400	345	.....
Do.....	1	44.0	5	.....	2.02	2.09	2.00	4.18	1,710	409	.....
Do.....	1	44.0	5	.....	2.06	2.07	2.00	4.14	1,610	389	.....
Do.....	1	44.0	5	.....	2.00	2.06	2.04	4.20	1,550	369	386

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—			Dimensions.			Sec- tional area.	Compressive strength.			Remarks.
	Ce- ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur- face.		Total.		Per square inch.	Mean.		
							Inches.	Inches.						
Silica.....	Neat.	.....	Per ct. 25.8	Days, 1	Days, 6	1.99	2.06	2.08	Sq. inches.	Pounds.	Pounds.	Pounds.		
	Neat.	.....	.....	.....	.....	2.01	2.04	1.98	4.04	8,600	2,040	.....		
	Neat.	.....	.....	.....	.....	2.06	2.07	1.99	4.12	7,990	1,850	.....		
	Neat.	.....	.....	.....	.....	2.06	2.09	2.00	4.18	7,160	1,740	.....		
	Neat.	.....	.....	.....	.....	2.01	2.09	1.99	4.16	7,660	1,790	.....		
Do.....	Neat.	.....	25.8	31	.....	1.97	2.01	2.08	4.16	8,400	2,020	.....		
	Neat.	.....	.....	.....	.....	2.08	2.08	1.97	4.06	9,450	2,320	.....		
	Neat.	.....	.....	.....	.....	2.02	2.05	2.04	4.04	8,800	2,080	.....		
	Neat.	.....	.....	.....	.....	1.96	2.06	1.96	4.18	8,700	2,090	.....		
Do.....	Neat.	.....	25.8	1	30	1.99	2.06	1.99	4.02	6,900	1,720	2,070		
	Neat.	.....	.....	.....	.....	2.00	2.06	2.02	4.10	11,800	2,760	.....		
	Neat.	.....	.....	.....	.....	2.02	2.10	2.04	4.14	11,900	2,870	.....		
	Neat.	.....	.....	.....	.....	2.02	2.10	2.02	4.28	12,600	2,940	.....		
	Neat.	.....	.....	.....	.....	1.99	2.06	2.01	4.24	11,500	2,710	.....		
Do.....	Neat.	.....	25.8	93	.....	1.94	1.99	2.06	4.14	11,900	2,870	2,880		
	Neat.	.....	.....	.....	.....	1.98	2.00	2.04	4.08	9,600	2,340	.....		
	Neat.	.....	.....	.....	.....	1.88	2.02	2.08	4.10	10,300	2,510	.....		
	Neat.	.....	.....	.....	.....	2.01	1.97	2.08	4.00	9,050	2,260	.....		
	Neat.	.....	.....	.....	.....	2.08	1.99	2.02	4.02	10,100	2,510	2,420		
Do.....	Neat.	.....	25.8	1	92	2.02	2.00	2.10	4.20	13,200	8,140	.....		
	Neat.	.....	.....	.....	.....	2.01	2.00	2.11	4.22	12,700	8,010	.....		
	Neat.	.....	.....	.....	.....	2.04	2.01	2.07	4.16	13,000	2,130	.....		
	Neat.	.....	.....	.....	.....	2.01	2.00	2.07	4.14	12,900	8,120	.....		
	Neat.	.....	.....	.....	.....	2.00	2.00	2.07	4.14	13,100	8,160	3,110		
Do.....	Neat.	.....	25.8	93	.....	3.00	3.08	3.13	9.64	18,300	1,900	.....		
	Neat.	.....	.....	.....	.....	3.00	3.06	3.06	9.86	18,500	1,980	.....		
	Neat.	.....	.....	.....	.....	3.07	3.00	3.07	9.21	18,200	1,960	1,960		
Do.....	Neat.	.....	25.8	1	92	3.02	3.06	3.14	9.61	33,200	8,450	.....		
	Neat.	.....	.....	.....	.....	3.01	3.09	3.11	9.61	33,100	8,440	.....		
	Neat.	.....	.....	.....	.....	3.01	3.08	3.07	9.46	32,900	8,460	.....		
Do.....	Neat.	.....	25.8	98	.....	3.97	4.05	3.99	16.16	30,400	1,880	1,880		



Do.....	Neat.....	25.8	1	92	4.08	8.99	8.98	15.98	42,800	2,660	2,800
Do.....	1	32.0	6	.....	4.00	4.07	4.08	16.82	48,400	2,980	.....
Do.....	1	32.0	1	5	1.97	2.06	2.01	4.14	4,240	1,020	.....
Do.....	1	32.0	1	5	2.02	2.08	2.01	4.04	4,410	1,090	.....
Do.....	1	32.0	1	5	2.00	2.06	2.00	4.14	8,830	2,920	.....
Do.....	1	32.0	1	5	1.98	2.08	2.00	4.10	8,610	856	.....
Do.....	1	32.0	1	5	2.00	2.06	1.98	4.08	8,820	818	942
Do.....	1	32.0	1	5	2.04	2.06	2.01	4.10	4,810	1,170	.....
Do.....	1	32.0	1	5	2.04	2.06	2.01	4.14	4,480	1,060	.....
Do.....	1	32.0	1	5	2.08	2.09	2.01	4.20	4,120	981	.....
Do.....	1	32.0	1	5	1.98	2.11	2.06	4.35	4,410	1,010	.....
Do.....	1	32.0	1	5	2.01	2.04	2.01	4.10	4,870	1,190	1,090
Do.....	1	32.0	32	.....	1.98	2.06	1.99	4.08	6,040	1,480	.....
Do.....	1	32.0	32	.....	2.06	2.06	2.02	4.14	5,500	1,330	.....
Do.....	1	32.0	32	.....	1.99	2.02	2.01	4.06	6,700	1,650	.....
Do.....	1	32.0	32	.....	2.04	2.06	2.08	4.16	5,900	1,420	.....
Do.....	1	32.0	32	.....	2.02	2.02	2.06	4.14	5,900	1,430	1,460
Do.....	1	32.0	1	31	2.00	2.06	2.04	4.18	8,320	1,990	.....
Do.....	1	32.0	1	31	1.99	2.06	2.06	4.22	8,400	1,990	.....
Do.....	1	32.0	1	31	2.01	2.06	2.04	4.20	7,600	1,810	.....
Do.....	1	32.0	1	31	2.01	2.04	2.01	4.10	8,100	1,890	.....
Do.....	1	32.0	1	31	2.01	2.08	2.04	4.14	7,500	1,810	1,920
Do.....	1	32.0	92	.....	2.02	2.02	2.07	4.18	6,700	1,600	.....
Do.....	1	32.0	92	.....	1.96	2.08	2.06	4.18	7,100	1,700	.....
Do.....	1	32.0	92	.....	1.96	2.02	2.08	4.20	6,600	1,570	.....
Do.....	1	32.0	92	.....	2.00	2.04	2.04	4.10	6,900	1,680	.....
Do.....	1	32.0	92	.....	2.00	2.06	2.06	4.22	6,800	1,490	1,610
Do.....	1	32.0	1	91	2.00	2.02	2.06	4.16	9,300	2,240	.....
Do.....	1	32.0	1	91	2.00	2.00	2.06	4.12	10,100	2,450	.....
Do.....	1	32.0	1	91	1.90	2.02	2.08	4.20	10,800	2,450	.....
Do.....	1	32.0	1	91	2.00	2.07	2.07	4.24	9,500	2,190	.....
Do.....	1	32.0	1	91	2.00	2.01	2.12	4.26	10,100	2,870	2,940
Do.....	1	32.0	92	.....	8.04	8.02	8.10	9.86	18,200	1,410	.....
Do.....	1	32.0	92	.....	8.00	8.07	8.06	9.36	13,700	1,460	1,440
Do.....	1	32.0	1	91	8.02	8.08	8.11	9.49	27,400	2,890	.....
Do.....	1	32.0	1	91	8.01	8.09	8.12	9.64	28,800	2,470	2,680
Do.....	1	44.0	5	.....	1.99	2.06	1.98	4.08	1,710	419	.....
Do.....	1	44.0	5	.....	2.03	2.08	2.00	4.08	1,400	848	.....
Do.....	1	44.0	5	.....	2.02	2.09	2.00	4.18	1,710	408	.....
Do.....	1	44.0	5	.....	2.06	2.07	2.00	4.14	1,610	388	.....
Do.....	1	44.0	5	.....	2.00	2.06	2.04	4.20	1,550	368	886

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—		Dimensions.			Sec-tional area.	Compressive strength.			Remarks.	
	Ce-ment.	Sand.	Water.	Air.	Days.	Water.	Height.	Compressed sur-face.		Sq. inches.	Total.	Per square inch.		Mean.
Silica	1	2	44.0	1	Days.	4	2.05	2.03	3.88	1,550	389	.....	.....	
							2.05	2.04	4.06	1,980	493	.....	.....	
							2.05	2.01	4.02	1,900	473	.....	.....	
							2.02	2.05	4.08	1,480	363	.....	.....	
						2.05	2.03	4.20	1,570	398	424	.....		
Do.	1	2	44.0	31	.....	.....	2.01	2.07	1.98	2,850	695	.....	.....	
							2.01	2.09	2.04	2,900	702	.....	.....	
							2.01	2.07	2.01	3,300	798	.....	.....	
							2.02	2.08	2.01	2,670	654	.....	.....	
						2.01	2.06	4.14	2,880	698	708	.....		
Do.	1	2	44.0	1	30	.....	2.03	2.04	3.88	3,760	959	.....	.....	
							1.92	2.04	4.14	3,100	749	.....	.....	
							1.98	2.06	1.99	3,600	918	.....	.....	
							2.05	2.03	2.01	3,350	821	.....	.....	
						2.05	2.05	3.94	3,710	942	880	.....		
Do.	1	2	44.0	92	.....	.....	1.98	2.00	4.16	4,100	986	.....	.....	
							2.00	2.01	2.04	3,700	902	.....	.....	
							2.04	1.94	2.05	2,900	729	.....	.....	
							2.02	2.00	2.06	4,12	8,200	777	.....	
						2.01	2.02	4.20	3,600	857	850	.....		
Do.	1	2	44.0	1	91	.....	1.99	2.05	4.06	4,500	1,110	.....	.....	
							2.10	2.04	4.14	5,000	1,210	.....	.....	
							2.00	1.99	2.07	4,550	1,100	.....	.....	
							2.01	2.10	4.33	5,400	1,250	.....	.....	
						2.01	2.08	4.18	3,860	923	1,120	.....		
Do.	1	2	44.0	92	.....	.....	3.07	3.00	3.05	7,620	883	.....	.....	
							3.03	3.01	3.07	7,040	782	.....	.....	
							3.01	3.06	3.10	8,100	867	.....	.....	
							3.04	3.00	3.06	9,400	1,020	.....	.....	



COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.			Age in—		Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur-face.			Total.	Per square inch.	Mean.	
							Per ct.	Days.					
Silica.....	1	3	58.0	93		3.00	3.02	3.06	9.30	4,700	505	Pounds.	
						3.00	3.05	3.06	9.15	4,600	503		
						3.05	3.00	3.07	9.18	6,500	708		
						3.05	3.00	3.07	9.21	5,800	680	587	
Do.....	1	3	58.0	1	93	3.06	3.02	3.09	9.33	8,500	911		
						3.02	3.03	3.04	9.21	8,600	934		
						3.01	3.07	3.08	9.46	9,500	1,000		
						3.02	3.00	3.10	9.30	8,300	892	984	
Do.....	1	3	58.0	93		4.03	3.99	4.03	16.08	11,300	703		
						3.97	4.03	4.00	16.12	12,100	751		
						4.07	3.97	4.02	15.96	9,800	614		
						3.97	4.05	4.01	16.24	8,100	499		
						4.05	3.99	4.06	16.20	8,400	519	617	
Do.....	1	3	58.0	1	93	3.99	4.05	4.16	16.85	15,200	902		
						4.07	3.96	4.11	16.36	11,600	709		
						4.02	3.99	4.05	16.16	12,900	798		
						3.99	4.05	4.06	16.44	14,000	852		
						4.06	3.96	3.98	15.76	13,400	850	822	
Newark and Rosen-dale.	Neat.		37.6	7		2.01	2.06	2.05	4.26	2,000	469		
						2.03	2.02	1.99	4.02	2,190	545		
						2.06	2.04	2.09	4.26	1,990	467		
						2.03	2.01	2.05	4.12	2,010	488		
						2.04	2.05	2.05	4.10	2,150	524	499	
Do.....	Neat.		37.6	1	6	2.08	2.06	2.03	4.18	1,710	409		
						1.99	2.04	2.00	4.08	1,400	343		
						2.02	2.03	2.05	4.16	1,650	373		
						2.03	2.02	2.07	4.20	1,690	379		
						2.04	2.03	2.02	4.10	1,610	383	379	
Do.....	Neat.		37.6	39		2.01	2.09	2.03	4.24	4,400	1,040		
						2.04	2.06	2.03	4.18	6,000	1,200		
						2.01	2.05	2.03	4.16	4,500	1,080		
						2.01	2.04	2.04	4.16	3,980	1,037		
						2.00	2.06	2.06	4.08	3,500	858	1,030	

Do.....	Neat.....	37.6	1	38	2.02	2.04	2.02	4.12	6,000	1,460	.....
.....	.....	.....	.....	.....	2.04	2.04	2.09	4.26	6,100	1,430	.....
.....	.....	.....	.....	.....	2.04	2.05	2.10	4.31	5,600	1,300	.....
.....	.....	.....	.....	.....	2.01	2.05	2.04	4.18	6,700	1,600	.....
.....	.....	.....	.....	.....	2.02	2.06	2.04	4.20	6,910	1,650	1,490
Do.....	Neat.....	37.6	98	.....	2.03	2.03	2.07	4.20	7,100	1,690	.....
.....	.....	.....	.....	.....	2.01	2.01	2.08	4.18	6,740	1,610	.....
.....	.....	.....	.....	.....	2.06	2.05	2.05	4.22	5,700	1,350	.....
.....	.....	.....	.....	.....	2.02	2.04	2.07	4.22	6,050	1,430	.....
.....	.....	.....	.....	.....	2.03	2.07	2.07	4.28	5,400	1,280	1,470
Do.....	Neat.....	37.6	1	92	2.05	2.04	2.07	4.22	6,900	1,640	.....
.....	.....	.....	.....	.....	1.95	2.07	2.02	4.18	9,600	2,300	.....
.....	.....	.....	.....	.....	2.06	2.06	2.05	4.22	8,200	1,940	.....
.....	.....	.....	.....	.....	2.05	2.03	2.08	4.22	9,800	2,320	.....
.....	.....	.....	.....	.....	2.02	2.03	2.08	4.22	7,600	1,780	2,000
Do.....	Neat.....	37.6	96	.....	3.00	3.06	3.11	9.52	12,900	1,360	.....
.....	.....	.....	.....	.....	3.05	3.00	3.10	9.30	11,900	1,280	.....
.....	.....	.....	.....	.....	3.00	3.06	3.10	9.49	12,400	1,310	.....
.....	.....	.....	.....	.....	3.08	3.01	3.17	9.54	14,100	1,460	1,360
Do.....	Neat.....	37.6	3	92	3.02	3.07	3.14	9.64	24,300	2,520	.....
.....	.....	.....	.....	.....	3.02	3.06	3.11	9.55	21,600	2,280	.....
.....	.....	.....	.....	.....	3.05	3.06	3.14	9.85	23,600	2,560	.....
.....	.....	.....	.....	.....	3.02	3.08	3.13	9.70	24,600	2,540	2,450
Do.....	Neat.....	37.6	96	.....	4.00	4.07	4.06	16.52	24,300	1,470	.....
.....	.....	.....	.....	.....	3.97	4.07	4.02	16.36	20,100	1,200	1,350
Do.....	Neat.....	37.6	4	92	4.00	4.05	4.02	16.28	37,600	2,310	.....
.....	.....	.....	.....	.....	4.04	3.99	4.01	16.00	38,500	2,410	2,360
Do.....	Neat.....	37.6	96	.....	5.97	6.04	6.19	37.39	46,700	1,250	1,250
Do.....	Neat.....	37.6	4	92	6.05	6.00	6.19	37.14	75,100	2,020	2,020
Do.....	Neat.....	37.6	186	.....	2.00	2.03	2.07	4.20	9,300	2,210	.....
.....	.....	.....	.....	.....	2.02	2.02	2.06	4.16	8,400	2,020	.....
.....	.....	.....	.....	.....	2.00	2.02	2.06	4.16	7,650	1,840	.....
.....	.....	.....	.....	.....	2.03	2.01	2.06	4.14	7,500	1,810	.....
.....	.....	.....	.....	.....	2.04	2.06	2.08	4.28	8,200	1,920	1,960
Do.....	Neat.....	37.6	1	183	2.02	2.06	2.07	4.26	10,900	2,560	.....
.....	.....	.....	.....	.....	2.06	2.09	2.05	4.28	9,200	2,150	.....
.....	.....	.....	.....	.....	2.03	2.06	2.05	4.20	9,100	2,170	.....
.....	.....	.....	.....	.....	2.03	2.06	2.09	4.31	9,400	2,180	.....
.....	.....	.....	.....	.....	2.03	2.02	2.04	4.12	9,650	2,340	2,280

1 day in air before and 2 days in air after interval in water.

1 day in air before and 3 days in air after interval in water.

Do.

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.		Age in—		Dimensions.			Sectional area.	Compressive strength.			Remarks.						
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur- face.		Total.	Per square inch.	Mean.							
							Inches.						Sq. inches.					
Obelisk.....	Neat.....	.....	40.5	Days 6	Days .....	Inches. 2.03	Inches. 2.04	Sq. inches. 4.16	Pounds. 8,900	Pounds. 938	Pounds. .....	.....						
													.....	2.06	4.12	8,150	765	.....
													.....	2.03	4.08	8,880	826	.....
													.....	2.01	4.14	8,780	913	.....
													.....	2.05	4.14	8,670	922	873
Do.....	Neat.....	.....	40.5	1	5	2.01	1.99	4.02	2,680	665	.....	.....						
													.....	2.05	4.04	2,490	618	.....
													.....	2.02	4.04	3,000	743	.....
													.....	2.01	4.06	2,710	667	.....
													.....	2.01	4.26	2,700	634	665
Do.....	Neat.....	.....	40.5	38	.....	2.01	2.00	3.98	6,720	1,690	.....	.....						
													.....	2.02	4.12	6,400	1,550	.....
													.....	2.00	4.04	6,020	1,490	.....
													.....	2.02	4.14	6,200	1,500	.....
													.....	2.00	4.02	4,700	1,170	1,480
Do.....	Neat.....	.....	40.5	1	37	2.03	2.03	4.08	5,100	1,250	.....	.....						
													.....	2.03	4.10	5,300	1,230	.....
													.....	2.03	4.12	5,600	1,330	.....
													.....	1.98	4.10	5,920	1,440	.....
													.....	2.00	3.94	5,600	1,320	1,350
Do.....	Neat.....	.....	40.5	92	.....	1.97	2.00	3.98	6,400	1,610	.....	.....						
													.....	2.03	4.09	6,000	2,940	.....
													.....	2.03	4.04	6,300	2,800	.....
													.....	1.98	4.04	7,100	3,400	.....
													.....	1.98	3.98	8,300	2,690	1,960
Do.....	Neat.....	.....	40.5	1	91	2.05	2.00	4.02	7,400	1,840	.....	.....						
													.....	2.03	4.00	8,100	2,060	.....
													.....	2.05	4.08	10,000	2,450	.....
													.....	1.99	4.00	8,300	2,830	.....
													.....	2.07	4.13	10,500	2,510	2,240

Do.....	Neat.....	40.5	94	3.00	3.02	3.01	9.09	18,900	2,080	.....
.....	.....	.....	.....	3.00	3.01	2.99	9.00	19,800	2,200	.....
.....	.....	.....	.....	3.00	3.01	3.00	9.00	19,100	2,120	.....
.....	.....	.....	.....	3.01	3.04	3.00	9.12	17,600	1,960	.....
.....	.....	.....	.....	3.01	3.04	3.00	9.12	19,700	2,160	2,100
Do.....	Neat.....	40.5	3	3.06	3.03	3.02	9.15	23,100	2,520	.....
.....	.....	.....	91	3.02	3.08	3.00	9.24	24,700	2,670	.....
.....	.....	.....	91	3.02	3.10	2.97	9.21	24,800	2,690	.....
.....	.....	.....	.....	3.04	3.02	3.07	9.27	24,100	2,600	.....
.....	.....	.....	.....	3.04	3.05	2.99	9.12	23,200	2,540	2,600
Do.....	Neat.....	40.5	95	4.03	3.97	3.90	15.48	31,200	2,020	.....
.....	.....	.....	.....	3.98	4.06	3.91	16.84	36,600	2,250	2,135
Do.....	Neat.....	40.5	4	4.05	4.00	3.98	15.92	48,600	2,740	.....
.....	.....	.....	91	4.09	4.00	3.97	15.88	41,400	2,610	2,675
Do.....	Neat.....	40.5	185	1.99	1.98	2.00	3.96	10,600	2,680	.....
.....	.....	.....	.....	1.98	1.99	2.03	4.04	9,500	2,850	.....
.....	.....	.....	.....	1.98	2.01	2.00	4.02	9,750	2,480	.....
.....	.....	.....	.....	2.04	2.00	2.01	4.02	9,820	2,440	.....
.....	.....	.....	.....	1.97	2.00	2.01	4.02	9,700	2,410	2,460
Do.....	Neat.....	40.5	1	2.04	2.03	2.02	4.10	10,500	2,560	.....
.....	.....	.....	182	2.01	2.04	2.05	4.18	11,600	2,780	.....
.....	.....	.....	.....	2.08	2.06	2.01	4.18	10,300	2,460	.....
.....	.....	.....	.....	2.02	2.02	2.01	4.06	10,100	2,490	.....
.....	.....	.....	.....	2.06	2.04	2.03	4.14	10,600	2,560	2,570
Do.....	1	1	42.0	2.04	2.04	2.02	4.12	2,710	658	.....
.....	.....	.....	7	2.01	2.05	2.02	4.10	2,400	585	.....
.....	.....	.....	.....	2.02	2.03	2.03	4.25	2,680	684	.....
.....	.....	.....	.....	2.07	2.03	1.98	3.92	2,800	740	.....
.....	.....	.....	.....	2.04	2.02	2.01	4.06	2,780	672	670
Do.....	1	1	42.0	2.01	2.03	2.00	4.06	2,400	591	.....
.....	.....	.....	1	2.02	2.07	2.02	4.13	2,420	573	.....
.....	.....	.....	.....	2.03	2.03	2.02	4.10	2,280	554	.....
.....	.....	.....	.....	2.08	2.05	2.03	4.16	2,450	589	.....
.....	.....	.....	.....	2.02	2.04	2.03	4.14	2,200	581	569
Do.....	1	1	42.0	2.06	2.06	2.01	4.18	4,500	1,060	.....
.....	.....	.....	35	2.02	2.05	2.06	4.26	4,450	1,040	.....
.....	.....	.....	.....	2.05	2.03	2.05	4.16	5,550	1,390	.....
.....	.....	.....	.....	2.10	2.02	2.01	4.06	4,100	1,010	.....
.....	.....	.....	.....	2.02	2.01	2.05	4.12	5,120	1,140	1,140

1 day in air before and 2 days in air after interval in water.

1 day in air before and 3 days in air after interval in water.

Do.

COMPRESSION TESTS IN WHICH ONE-HALF OF THE BATCH OF SPECIMENS WAS SET IN AIR AND ONE-HALF IN WATER, ETC.—Continued.

Brand of cement.	Composition.		Age in—		Dimensions.			Sectional area.	Compressive strength.			Remarks.	
	Ce-ment.	Sand.	Water.	Air.	Water.	Height.	Compressed sur- face.		Total.	Per square inch.	Mean.		
							Inches.						Inches.
Obelisk.....	1	1	42.0	1	84	2.02	1.98	2.02	4.00	3,900	975	.....	
						2.04	2.04	2.04	4.12	4,200	1,020	.....	
						2.03	2.03	1.88	3.92	4,800	1,220	.....	
						2.01	2.00	2.03	4.06	4,400	1,060	.....	
Do.....	1	1	42.0	92	.....	2.04	2.02	2.01	4.06	5,100	1,290	.....	
						2.00	1.98	2.06	4.08	7,300	1,790	.....	
						2.02	2.02	2.01	4.06	5,100	1,260	.....	
						2.01	2.06	2.06	4.24	5,900	1,820	.....	
Do.....	1	1	42.0	1	91	2.00	2.05	2.06	4.20	6,600	1,570	.....	
						2.00	2.02	2.06	4.20	6,400	1,520	.....	
						2.06	2.02	2.06	4.16	7,200	1,780	.....	
						2.02	2.02	2.04	4.12	7,000	1,700	.....	
Do.....	1	1	42.0	92	.....	2.01	2.01	2.01	4.04	6,400	1,580	.....	
						3.02	3.06	3.12	9.55	15,400	1,610	.....	
						3.01	3.01	3.12	9.39	15,100	1,610	.....	
						3.02	3.00	3.11	9.33	12,400	1,330	.....	
Do.....	1	1	42.0	1	91	3.02	3.11	3.14	9.77	16,200	1,660	.....	
						3.02	3.01	3.12	9.39	16,900	1,760	.....	
						3.03	3.02	3.15	9.51	17,100	1,800	.....	
						3.02	3.11	3.13	9.73	17,600	1,810	.....	



## CEMENT AND MORTAR CUBES.

Summary of results on 2-inch cubes. One-half of each batch set in air, one-half in water.

(Specimens set in water were set the first day after mixing in air.)

Brand.	Composition.			Age.	Mean compressive strength.	
	Cement.	Sand.	Water.		Set in air, per square inch.	Set in water, per square inch.
Atlas.....	1	1	<i>Per cent.</i> 82.0	1 week .....	<i>Pounds.</i> 2,540	2,580
				1 month .....	3,010	3,470
				3 months .....	3,390	4,550
Lehigh.....	Neat.		27.0	1 month .....	4,540	6,400
				3 months .....	4,480	6,650
Do .....	1	1	34.0	1 month .....	2,510	3,970
				3 months .....	2,580	4,970
Pentusular.....	Neat.		25.5	1 week .....	4,970	6,260
				1 month .....	6,140	8,870
				3 months .....	6,090	9,560
Do .....	1	1	34.2	1 week .....	2,850	2,880
				1 month .....	3,400	4,680
				3 months .....	3,410	
Do .....	1	2	48.1	1 week .....	1,370	1,440
				1 month .....	1,490	2,750
Do .....	1	4	87.0	1 week .....	473	557
				1 month .....	656	950
Cathedral.....	Neat.		28.8	1 week .....	2,060	1,900
				1 month .....	2,590	2,600
				3 months .....	2,840	3,200
Do .....	1	1	36.6	1 week .....	1,350	<sup>a</sup> 1,340
				1 month .....	2,140	<sup>a</sup> 2,130
				3 months .....	2,190	2,410
Do .....	1	2		1 week .....	718	<sup>b</sup> 725
				1 month .....	816	<sup>b</sup> 1,060
				3 months .....	851	1,320
Do .....	1	3	68.8	1 week .....	335	297
				1 month .....	488	472
				3 months .....	608	625
Silica .....	Neat.		25.8	1 week .....	1,670	1,880
				1 month .....	2,070	2,830
				3 months .....	2,420	3,110
Do .....	1	1	32.0	6 days .....	942	1,090
				1 month .....	1,460	1,920
				3 months .....	1,610	2,340
Do .....	1	2	44.0	5 days .....	386	424
				1 month .....	424	708
				3 months .....	850	1,120
Do .....	1	3	58.0	4 days .....	130	132
				1 month .....	219	360
				3 months .....	306	571
Newark and Rosendale.....	Neat.		37.6	1 week .....	499	379
				39 days .....	1,030	1,490
				3 months .....	1,490	2,000
				6 months .....	1,960	2,280
Obelisk .....	Neat.		40.5	6 days .....	873	665
				38 days .....	1,480	1,350
				3 months .....	1,960	2,240
				6 months .....	2,460	2,570
Do .....	1	1	42.0	1 week .....	670	569
				35 days .....	1,140	1,050
				3 months .....	1,880	1,620

<sup>a</sup> 4 days in air.<sup>b</sup> 2 days in air.

## CEMENT CUBES.

Material set in air or in water followed by different periods of exposure under reversed conditions.

## FIRST SERIES.

Two batches of cubes were made for this series of tests. The specimens of one batch were set in air initial periods of time, from one week to three months, after which they were placed in water, where they remained until the time of testing.

In the other batch the conditions were reversed and an initial period in water was followed by a period in air. Also specimens from each batch set the full time in air and in water.

Tests were made when the material was four months old.

TESTS OF CUBES SET IN AIR, AND THOSE SET IN AIR FOLLOWED BY AN INTERVAL IN WATER.

Marks, ☆ J. 23.

Composition, Star cement, without plaster, neat.

Water used in gauging, 24.8 per cent of cement.

Age in—			Dimensions.			Sectional area.	Compressive strength.			Remarks.	
Air.		Water.	Height.	Compressed surface.			Total.	Per square inch.	Mean.		
Mos.	W <sup>ks.</sup>	Days.		Mos.	W <sup>ks.</sup>	Ins.	Ins.	Ins.	Sq. in.	Pounds.	Pounds.
	1	1			2.06	2.01	2.03	4.08	11,570	2,840	
					2.05	2.01	2.05	4.12	13,580	3,300	
					2.01	2.01	2.00	4.02	11,800	2,940	
					2.02	2.03	2.03	4.12	11,400	2,770	
					2.04	2.05	2.03	4.16	12,900	3,100	2,990
	2				2.01	1.99	2.04	4.06	13,500	3,330	
					2.03	2.03	2.04	4.14	12,790	3,090	
					2.03	2.03	2.05	4.16	12,800	2,960	
					1.99	1.97	2.00	3.94	12,970	3,290	
					2.03	1.99	2.04	4.06	12,950	3,180	3,170
	3				2.00	2.03	2.06	4.18	13,650	3,270	
					2.00	2.01	1.99	4.00	14,030	3,510	
					2.00	2.00	2.00	4.00	12,000	3,000	
					2.00	2.02	2.02	4.08	13,800	3,380	
					2.05	2.01	2.06	4.14	14,350	3,450	3,320
	3	2			2.00	2.00	2.02	4.04	16,500	4,080	
					2.02	2.02	2.03	4.10	18,360	4,480	
					2.04	2.09	2.00	4.18	13,400	3,210	
					2.00	2.05	2.06	4.22	14,320	3,390	
					2.00	2.05	2.04	4.18	15,700	3,760	3,780
	2				1.99	1.97	2.02	3.98	15,200	3,820	
					2.01	1.94	2.02	3.92	13,700	3,490	
					2.05	2.02	2.03	4.10	12,900	3,150	
					2.04	2.02	2.03	4.10	16,900	4,120	
					2.04	2.03	2.04	4.14	14,600	3,530	3,620
	3				2.01	2.00	2.04	4.08	16,300	4,000	
					2.00	2.00	1.99	3.98	14,100	3,540	
					2.06	1.95	2.02	3.94	11,800	2,990	
					2.01	2.03	2.01	4.08	11,200	2,750	
					2.06	2.03	2.03	4.12	15,600	3,790	3,410
	4				2.03	2.02	2.01	4.06	16,000	3,940	
					2.04	1.91	2.04	3.90	13,200	3,380	
					2.00	2.05	2.02	4.14	17,100	4,130	
					2.00	1.99	2.02	4.02	17,500	4,350	
					2.02	2.02	2.02	4.08	18,200	4,460	4,050

TESTS OF CUBES SET IN AIR, ETC.—Continued.

Age in—					Dimensions.			Sectional area.	Compressive strength.			Remarks.
Air.			Water.		Height.	Compressed surface.			Total.	Per square inch.	Mean.	
Mos.	W'ks.	Days.	Mos.	W'ks.		In.	In.	In.				Sq. in.
.....	.....	1	4	.....	2.02	2.06	2.00	4.12	25,400	6,170	.....	
.....	.....	.....	.....	.....	2.00	2.04	2.02	4.12	26,400	6,410	.....	
.....	.....	.....	.....	.....	2.08	2.05	2.08	4.16	25,900	6,280	.....	
.....	.....	.....	.....	.....	2.08	2.04	2.01	4.10	26,400	6,440	.....	
.....	.....	.....	.....	.....	2.01	2.03	2.00	4.06	21,700	5,340	6,120	
.....	1	.....	3	3	2.00	1.98	2.04	4.04	22,800	5,640	.....	
.....	.....	.....	.....	.....	2.02	2.05	2.06	4.22	16,200	3,840	.....	
.....	.....	.....	.....	.....	2.02	2.02	2.04	4.12	19,700	4,780	.....	
.....	.....	.....	.....	.....	2.00	1.99	2.02	4.02	22,000	5,470	.....	
.....	.....	.....	.....	.....	2.02	2.04	2.02	4.12	19,800	4,810	4,910	
.....	2	.....	3	2	2.02	2.03	2.04	4.14	16,800	4,060	.....	
.....	.....	.....	.....	.....	2.02	2.04	2.05	4.18	19,900	4,760	.....	
.....	.....	.....	.....	.....	2.04	2.03	2.00	4.06	17,600	4,380	.....	
.....	.....	.....	.....	.....	2.06	2.03	2.04	4.14	23,600	5,700	.....	
.....	.....	.....	.....	.....	2.02	2.00	1.98	3.96	19,700	4,970	4,760	
.....	3	.....	3	1	2.04	2.01	2.06	4.14	19,900	4,810	.....	
.....	.....	.....	.....	.....	2.07	2.01	2.07	4.16	21,000	5,050	.....	
.....	.....	.....	.....	.....	2.08	2.01	2.04	4.10	19,100	4,660	.....	
.....	.....	.....	.....	.....	2.01	1.99	2.02	4.02	14,600	3,630	.....	
.....	.....	.....	.....	.....	2.00	2.07	2.02	4.18	19,900	4,760	4,580	
.....	3	2	3	1	2.08	2.04	2.04	4.16	18,100	4,350	.....	
.....	.....	.....	.....	.....	2.01	2.04	2.04	4.16	19,600	4,690	.....	
.....	.....	.....	.....	.....	2.05	2.01	2.02	4.06	17,400	4,290	.....	
.....	.....	.....	.....	.....	1.98	2.00	2.05	4.10	20,300	4,950	.....	
.....	.....	.....	.....	.....	2.04	2.03	2.00	4.06	15,900	3,920	4,440	
.....	2	.....	2	.....	2.02	2.06	1.98	4.08	17,400	4,260	.....	
.....	.....	.....	.....	.....	2.02	2.00	2.00	4.00	16,900	4,230	.....	
.....	.....	.....	.....	.....	2.00	1.97	2.02	3.98	19,800	4,970	.....	
.....	.....	.....	.....	.....	2.05	2.08	2.01	4.08	20,700	5,070	.....	
.....	.....	.....	.....	.....	2.01	1.99	2.02	4.02	18,100	4,500	4,610	
.....	3	.....	1	.....	2.04	2.00	2.02	4.04	15,100	3,740	.....	
.....	.....	.....	.....	.....	2.02	2.04	2.06	4.20	17,200	4,100	.....	
.....	.....	.....	.....	.....	1.95	2.05	2.01	4.12	16,100	3,910	.....	
.....	.....	.....	.....	.....	2.05	2.08	2.03	4.12	18,800	4,560	.....	
.....	.....	.....	.....	.....	2.01	2.04	2.02	4.12	16,600	4,030	4,070	
.....	4	.....	.....	.....	3.07	3.00	3.10	9.30	89,400	4,240	.....	
.....	.....	.....	.....	.....	3.00	3.06	3.07	9.39	44,100	4,700	.....	
.....	.....	.....	.....	.....	3.00	3.05	3.09	9.42	41,900	4,450	.....	
.....	.....	.....	.....	.....	3.03	3.00	3.10	9.30	48,300	4,660	4,510	

TESTS OF CUBES SET IN WATER, AND THOSE SET IN WATER FOLLOWED BY AN INTERVAL IN AIR.

Specimens set the first day after gauging in air.

Marks, ☆ J. 20.

Composition, Star cement, without plaster, neat.

Water used in gauging, 27 per cent of cement.

Age in—						Dimensions.			Sectional area.	Compressive strength.			Remarks.
Air.	Water.			Air.	Height.	Compressed surface.				Total.	Per square inch.	Mean.	
Days.	Mos.	W'ks.	Days.	Mos.		W'ks.	Ins.	Ins.	Ins.	Sq. in.	Lbs.	Lbs.	Lbs.
1			6			1.95	2.04	2.00	4.08	15,000	3,680	.....	
						2.01	2.01	1.97	3.96	10,100	2,560	.....	
						2.00	2.03	2.06	4.18	15,400	3,680	.....	
						2.06	2.05	1.99	4.08	12,500	3,060	.....	
						1.93	2.05	2.05	4.20	14,300	3,400	3,270	
1		1	5			2.01	2.02	2.06	4.16	18,900	4,540	.....	
						2.02	2.06	1.99	4.10	17,720	4,320	.....	
						2.03	2.05	2.02	4.14	17,450	4,210	.....	
						2.02	2.07	2.00	4.14	19,400	4,690	.....	
						2.00	2.02	1.96	3.96	18,700	4,720	4,500	
1		2	6			2.07	2.04	2.05	4.18	19,500	4,670	.....	
						2.06	2.01	2.01	4.04	17,200	4,260	.....	
						2.01	2.02	1.99	4.02	17,900	4,450	.....	
						2.06	2.03	2.04	4.14	19,900	4,780	.....	
						2.05	2.02	2.03	4.10	20,200	4,980	4,620	
1		3	4			2.06	2.04	1.94	3.96	22,500	5,680	.....	
						2.01	2.06	2.08	4.31	21,600	5,010	.....	
						2.04	2.03	2.03	4.12	19,900	4,810	.....	
						2.09	2.04	2.02	4.12	18,500	4,490	.....	
						2.00	2.02	2.00	4.04	19,200	4,750	4,960	
1	2					2.07	2.02	2.04	4.12	20,500	4,980	.....	
						2.04	2.06	2.04	4.20	24,800	5,900	.....	
						1.99	2.02	2.08	4.10	23,500	5,780	.....	
						2.03	2.03	2.04	4.14	19,900	4,810	.....	
						1.98	2.02	2.02	4.08	22,400	5,490	5,380	
1	3					2.05	2.06	2.05	4.22	20,500	4,860	.....	
						2.02	2.06	2.08	4.28	24,500	5,720	.....	
						2.05	2.03	2.04	4.14	23,000	5,560	.....	
						2.02	2.07	2.01	4.16	26,100	6,270	.....	
						2.00	2.04	2.02	4.12	21,100	5,120	5,510	
				4		2.10	2.02	2.02	4.08	17,000	4,170	.....	
						2.00	2.01	2.02	4.06	13,100	3,230	.....	
						1.99	1.99	2.05	4.08	15,100	3,700	.....	
						2.03	2.00	2.08	4.16	17,800	4,160	.....	
						2.01	2.09	2.02	4.22	14,200	3,360	3,720	
1			6	3	3	2.05	1.94	2.02	3.92	22,500	5,740	.....	
						2.00	2.02	2.01	4.06	22,100	5,440	.....	
						2.00	2.03	2.00	4.06	21,100	5,200	.....	
						2.05	2.02	2.04	4.12	19,200	4,660	.....	
						2.00	2.04	2.01	4.10	16,700	4,070	5,020	
1		1	6	3	2	2.04	2.06	2.03	4.18	21,700	5,190	.....	
						2.00	2.02	2.04	4.12	20,500	4,980	.....	
						2.00	2.03	2.05	4.16	22,700	5,460	.....	
						2.00	2.02	2.08	4.20	27,400	6,520	.....	
						2.01	2.03	2.08	4.22	17,600	4,170	5,260	
1		2	6	3	1	1.99	2.03	2.00	4.06	22,100	5,440	.....	
						2.01	2.04	2.00	4.08	26,800	6,570	.....	
						2.02	2.03	2.01	4.08	21,700	5,320	.....	
						2.04	2.05	2.02	4.14	28,100	6,790	.....	
						2.03	2.03	2.04	4.14	26,300	6,350	6,090	
1		3	4	3 <sup>a</sup>		2.05	2.04	2.05	4.18	24,100	5,770	.....	
						2.00	2.01	2.03	4.08	26,400	6,470	.....	
						2.00	2.04	2.00	4.08	22,900	5,610	.....	
						2.02	2.04	2.03	4.14	22,800	5,510	.....	
						2.03	2.10	2.02	4.24	21,400	5,050	5,680	

<sup>a</sup> And 4 days.

*Compressive str*

4,060

4,440

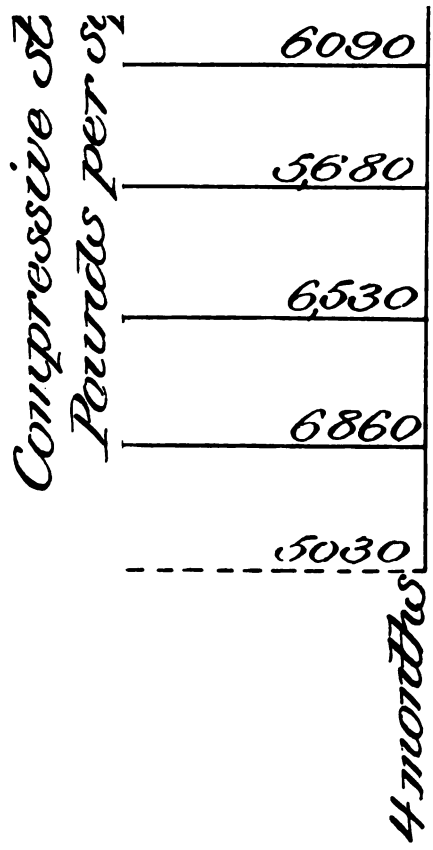
4,610

4,070

4,050

4 71107 d 713









CEMENT. SET IN AIR AND IN WATER.

TESTS OF CUBES SET IN WATER, ETC.—Continued.

Age in—						Dimensions.			Sectional area.	Compressive strength.			Remarks.
Air.	Water.			Air.		Height.	Compressed surface.			Total.	Per square inch.	Mean.	
Days.	Mos.	W'ks.	Days.	Mos.	W'ks.		Inch.	Inch.	Inch.				Sq. in.
1	2			2		2.03	2.06	2.02	4.16	80,600	7,860	.....	
						2.00	2.00	2.03	4.06	25,500	6,280	.....	
						1.98	2.01	2.03	4.08	21,400	5,260	.....	
						2.02	2.06	2.01	4.14	28,900	6,980	.....	
						2.02	2.04	2.06	4.20	28,500	6,790	6,580	
1	3			1		2.03	2.02	2.03	4.10	28,400	6,980	.....	
						2.01	2.02	1.98	4.00	28,800	5,830	.....	
						2.06	2.02	2.08	4.20	24,000	5,710	.....	
						2.04	1.92	2.01	3.86	30,200	7,820	.....	
						2.02	2.03	2.02	4.10	32,900	8,020	6,860	
1	4					2.02	2.03	2.02	4.10	23,000	5,610	.....	
						2.03	2.00	2.04	4.08	19,200	4,710	.....	
						2.04	1.91	2.05	3.92	18,300	4,670	.....	
						2.04	2.03	2.00	4.06	18,700	4,610	.....	
						2.02	2.07	2.04	4.22	23,500	5,570	5,030	
				4		3.00	3.03	3.08	9.33	37,600	4,080	.....	
						3.01	3.00	3.06	9.18	45,300	4,930	.....	
						3.07	3.00	3.05	9.15	46,100	5,040	.....	
						2.99	3.04	3.05	9.27	44,100	4,760	.....	
						3.01	3.01	3.03	9.12	43,600	4,780	4,710	
				4		4.06	4.00	4.03	16.12	74,700	4,680	.....	
						4.09	3.99	4.01	16.00	66,900	4,180	.....	
						4.07	3.98	3.96	15.76	70,100	4,450	.....	
						4.03	3.96	4.05	16.12	72,900	4,520	4,450	




Specimen	Material	Age	Strength	Modulus	Expansion	Weight	Water	Strength	Modulus	Expansion	Weight	Strength	Modulus	Expansion	Weight	Notes
S 26, 1x1	Steel	1	88.4	1	22	1	0	3.97	3.99	4.05	16.16	47,400	2,980	2,980	Fragments were a dark-green color. Had a strong ammoniacal odor.	
	Hoffman	Neat	34.9	1	22	0	0	4.00	4.05	4.17	16.89	82,100	4,860	4,860		
		Neat	34.9	1	22	8	8	4.08	4.00	4.19	16.76	88,100	4,960	4,960		
H 21	do	Neat	38.0	1	22	0	0	4.08	4.04	4.17	16.85	75,400	4,470	4,470	Cubes contained cracks before testing.	
		Neat	38.0	1	22	8	8	4.08	4.08	4.16	16.80	71,200	4,280	4,280		
		Neat	38.0	1	22	8	8	4.08	4.08	4.13	16.78	68,200	3,980	3,980		
H 1, 1x1	do	Neat	43.9	1	22	0	0	4.08	3.98	4.10	16.82	58,600	3,580	3,580		
		Neat	43.9	1	22	8	8	3.96	4.08	4.07	15.44	74,200	4,510	4,510		
		Neat	43.9	1	22	8	8	3.98	4.04	4.11	16.60	70,800	4,280	4,280		
H 20, 1x1	do	Neat	44.6	1	22	0	0	4.06	3.96	4.10	16.24	63,500	3,910	3,910		
		Neat	44.6	1	22	8	8	4.05	3.96	4.16	16.56	58,100	3,510	3,510		
		Neat	44.6	1	22	8	8	3.97	4.02	4.01	16.90	59,600	3,550	3,550		

COMPRESSIVE TESTS ON THE COMPARATIVE STRENGTH OF CEMENT SET IN WATER OR IN AIR, ETC.—Continued.  
Specimens which set in air during the first interval.

Marks.	Brand of cement.	Composition.			Age in—			Dimensions.			Sec- tional area.	Compressive strength.			Remarks.	
		Ce- ment.	Sand.	Water.	Mo. 22	Air.	Water.	Days.	Height.	Compressed surface.		Total.	Per square inch.	Mean.		
										Inches.						Inches.
H 21	Hoffman	Neat.		34.9			0			3.96 4.02 4.00	4.02 4.15 4.12	27,400 27,700 25,300	1,840 1,970 1,530			
										3.96 4.00	4.12 4.18	30,900	1,830	1,740		
		Neat.		34.9			9			4.06 4.02	4.14 3.97	25,600 30,700	1,550 1,880			
										4.04 4.04	4.13 4.07	27,400	1,670			
										3.97	4.07	25,600	1,580	1,670		
H 22	do	Neat.		38.0			22	0		3.98 3.97	4.06 4.10	21,900 28,300	1,860 1,720			
										3.98 3.99	4.12 4.14	25,100	1,520	1,525		
		Neat.		38.0			22	9		4.01 4.03	4.08 3.96	20,100 19,600	1,230 1,210			
										4.12 4.06	4.08 3.98	19,200 18,900	1,170 1,160			
H 1, 1×1	do	1	1	43.9			22	0		4.03 3.96	4.12 4.04	5,800 6,600	355 404	380		
										4.04	4.06	8,000	495	473		
		1	1	43.9			22	9		4.03 4.04	4.08 3.96	7,800 8,000	450 495			
										4.00	4.12	8,600	522			
		1	1	44.6			22	0		4.05 3.97	4.06 4.14	7,600 8,650	465 522			
										3.96	4.16	8,800	529	510		
		1	1	44.6			22	9		4.01 4.05	4.14 3.96	9,800 8,100	599 494			
										4.03 4.00	4.09 3.97	11,300 9,300	696 570			
										4.00	4.11					



4-INCH CUBE D19, DYCKERHOFF CEMENT.  
APPEARANCE 1 DAY AFTER HAVING BEEN HEATED TO 1,000 DEG. F.  
CUBE SET IN WATER 1 YEAR, 3 MONTHS, 23 DAYS BEFORE HEATING.  
LOSS IN WEIGHT UPON HEATING, 19 PER CENT.





4. A. H. ...  
... ..







4 INCH CUBE D19, DYCKERHOFF CEMENT.  
APPEARANCE 19 DAYS AFTER HAVING BEEN HEATED TO 1000 DEG. F.






4 INCH CUBE D20, DYCKERHOFF CEMENT.  
APPEARANCE 1 DAY AFTER HAVING BEEN HEATED TO 1000 DEG. F.  
CUBE SET IN AIR 1 YEAR, 3 MONTHS, 16 DAYS BEFORE HEATING.  
LOSS IN WEIGHT UPON HEATING, 11.1 PER CENT.





4 INCH CUBE D20, DYCKERHOFF CEMENT.  
APPEARANCE 6 DAYS AFTER HAVING BEEN HEATED TO 100° C. (212° F.)





4-INCH CUBE D20, DYCKERHOFF CEMENT.  
APPEARANCE 11 DAYS AFTER HAVING BEEN HEATED TO 1,000 DEG. F.





## CEMENTS AND MORTARS.

COMPRESSION TESTS OF CUBES AFTER HAVING BEEN HEATED TO  
DIFFERENT TEMPERATURES.

The cubes for this series were prepared and set in air or in water for a period of one year to a year and a half before they were heated, and intervals ranging from four days to nearly four months intervened between the time of heating and the time of testing.

The heated cubes were gradually raised to the temperatures recorded, and slowly cooled in dry sawdust or powdered asbestos. The time of heating was one hour, and the maximum temperature was maintained for one hour.

Cubes which were set in water were dried off on a radiator for twenty-four hours before heating in the muffle to the temperatures recorded.

During heating some of the cubes developed fine cracks, at first faintly shown, which enlarged after a few hours or days had elapsed. Photographs are shown illustrating the progressive development of these cracks. In other cases the cracks appeared more promptly. Among those which were heated to the higher temperatures of the series, which ranged from 200° to 1,000° F., there were cubes so badly cracked as to be unsuitable for testing.

TABLE SHOWING LOSS IN WEIGHT OF 4-INCH CUBES UPON HEATING.

Brand of cement.	Composition.			Cubes set in—	Age.			Heated to temperature of—	Weight of cubes				Loss.	Remarks.	
	Cement.	Sand.	Water.		Years.	Months.	Days.		Before heating.		After heating.				
									Lbs.	Ozs.	Lbs.	Ozs.			
Dyckerhoff	Neat.		Per cent. 29.0	Air	1	3	18	600	4	12.5	4	4.5	8.0	10.5	Each of the Dyckerhoff cubes showed slight cracks after heating.
									4	11.0	4	5.0	6.0	8.0	
									4	12.0	4	5.5	6.5	8.6	
Do.	Neat.		29.0	Air	1	3	16	700	4	11.0	4	5.0	6.0	8.0	
									4	11.0	4	4.5	6.5	8.1	
									4	8.5	4	3.5	5.0	6.9	
Do.	Neat.		29.0	Air	1	3	5	800	4	11.0	4	5.0	6.0	8.0	
									4	11.0	4	5.0	6.0	8.0	
									4	11.0	4	5.0	6.0	8.0	
Do.	Neat.		29.0	Air	1	3	2	900	4	10.5	4	3.5	7.0	9.4	
									4	12.5	4	5.0	7.5	9.8	
									4	11.0	4	3.5	7.5	10.0	
Do.	Neat.		29.0	Air	1	3	1	1,000	4	11.0	4	3.5	7.5	10.0	
									4	10.0	4	2.5	7.5	10.1	
									4	11.0	4	2.5	8.5	11.3	
Do.	Neat.		29.0	Air	1	3	16	1,000	4	12.5	4	4.0	8.5	11.1	
									5	2.0	4	4.0	14.0	17.1	
									5	2.0	4	4.5	16.5	19.5	
Do.	Neat.		29.0	Water	1	3	28	900	5	2.0	4	4.5	13.0	18.9	
									5	2.0	4	5.0	13.0	18.9	
									5	1.5	4	2.0	15.5	19.0	
Do.	Neat.		29.0	Water	1	3	23	1,000	5	1.5	4	2.0	15.5	19.0	
									5	1.5	4	4.5	14.0	17.0	
									5	1.0	4	3.0	14.0	17.3	
Steel	Neat.		28.0	Air	1	1	1	200	4	2.5	4	2.0	5	8	
									4	2.0	4	1.5	8	11.5	
									4	2.5	4	1.5	1.0	1.5	
Do.	Neat.		28.0	Air	1	1	2	300	4	1.5	3	14.0	3.5	5.3	
									4	2.0	3	14.5	3.5	5.3	
									4	2.5	3	15.0	3.5	5.3	

Do.....	Neat.....	28.0	Air.....	1	1	5	400	4	2.0	3	13.0	5.0	7.6
Do.....	Neat.....	28.0	Air.....	1	1	22	500	4	2.5	3	13.5	6.0	7.8
Do.....	Neat.....	28.0	Air.....	1	1	23	600	4	1.5	3	12.5	5.0	7.6
Do.....	Neat.....	28.0	Air.....	1	1	23	600	4	1.5	3	13.5	4.9	6.0
Do.....	Neat.....	28.0	Air.....	1	1	23	600	4	1.0	3	11.5	4.5	7.0
Do.....	Neat.....	28.0	Air.....	1	1	24	700	4	1.0	3	11.5	5.5	8.5
Do.....	Neat.....	28.0	Air.....	1	1	24	700	4	1.0	3	12.0	5.0	7.7
Do.....	Neat.....	28.0	Air.....	1	1	24	700	4	2.5	3	12.5	6.0	9.0
Do.....	Neat.....	28.0	Air.....	1	1	25	800	4	2.0	3	11.0	7.0	10.6
Do.....	Neat.....	28.0	Air.....	1	1	25	800	4	2.0	3	11.0	7.0	10.6
Do.....	Neat.....	28.0	Air.....	1	1	25	800	4	2.0	3	11.5	6.5	9.9
Do.....	Neat.....	28.0	Air.....	1	1	25	800	4	1.0	3	8.5	8.5	13.1
Do.....	Neat.....	28.0	Air.....	1	1	25	800	4	1.5	3	9.5	8.0	12.2
Do.....	Neat.....	28.0	Air.....	1	1	26	900	4	1.0	3	10.5	6.5	10.0
Do.....	Neat.....	28.0	Water.....	1	1	28	200	4	8.0	4	8.0	0	0
Do.....	Neat.....	28.0	Water.....	1	1	28	200	4	8.0	4	7.5	.5	.7
Do.....	Neat.....	28.0	Water.....	1	1	29	300	4	8.0	4	7.0	1.0	1.4
Do.....	Neat.....	28.0	Water.....	1	1	29	300	4	10.0	4	5.0	5.0	6.8
Do.....	Neat.....	28.0	Water.....	1	1	29	300	4	6.5	4	1.0	5.5	7.8
Do.....	Neat.....	28.0	Water.....	1	1	29	300	4	7.0	4	2.0	5.0	7.0
Do.....	Neat.....	28.0	Water.....	1	2	0	400	4	9.0	4	0	9.0	12.8
Do.....	Neat.....	28.0	Water.....	1	2	0	400	4	8.5	4	0	8.5	11.7
Do.....	Neat.....	28.0	Water.....	1	2	1	500	4	9.0	3	16.0	10.0	13.7
Do.....	Neat.....	28.0	Water.....	1	2	1	500	4	8.5	4	0	8.5	11.7
Do.....	Neat.....	28.0	Water.....	1	2	1	500	4	8.5	3	14.5	10.0	13.8
Do.....	Neat.....	28.0	Water.....	1	2	2	600	4	9.0	4	1.0	8.0	11.0
Do.....	Neat.....	28.0	Water.....	1	2	2	600	4	9.0	3	12.5	12.5	17.1
Do.....	Neat.....	28.0	Water.....	1	2	2	600	4	9.0	3	14.5	10.5	14.4
Do.....	Neat.....	28.0	Water.....	1	2	2	600	4	8.5	3	12.0	12.5	17.2
Do.....	Neat.....	28.0	Water.....	1	2	8	700	4	8.5	3	10.0	14.5	20.0
Do.....	Neat.....	28.0	Water.....	1	2	8	700	4	7.5	3	10.0	13.5	18.9
Do.....	Neat.....	28.0	Water.....	1	2	8	700	4	8.0	3	11.0	13.0	18.1
Do.....	Neat.....	28.0	Water.....	1	2	6	800	4	7.0	3	10.0	13.0	18.3
Do.....	Neat.....	28.0	Water.....	1	2	6	800	4	8.0	3	10.0	14.0	19.5
Do.....	Neat.....	28.0	Water.....	1	2	6	800	4	8.0	3	10.0	14.0	19.5
Do.....	Neat.....	28.0	Water.....	1	2	6	900	4	8.5	3	10.0	14.5	20.0

TABLE SHOWING LOSS IN WEIGHT OF 4-INCH CUBES UPON HEATING—Continued.

Brand of cement.	Composition.			Cubes set in—				Age.			Heated to temperature of—	Weight of cubes.				Loss.	Remarks.
	Cement.	Sand.	Water.	Per cent.	Cubes set in—	Years.	Months.	Days.	° F.	Before heating.		After heating.					
										Lbs.		Ozs.	Lbs.	Ozs.			
Steel.....	1	1	40.8	Air	1	6	24	200	4	6.0	4	5.5	4	5.5	.5	.7	
									4	6.0	4	6.5	4	6.0	.5	.7	
									4	7.0	4	6.0	4	6.0	1.0	1.4	
Do.....	1	1	40.8	Air	1	6	25	300	4	6.0	4	5.0	4	5.0	1.0	1.4	One crack after heating.
									4	6.0	4	5.0	4	5.0	1.0	1.4	
									4	5.5	4	4.5	4	4.5	1.0	1.4	
Do.....	1	1	40.8	Air	1	6	26	400	4	4.0	4	2.5	4	2.5	1.5	2.2	
									4	6.0	4	4.5	4	4.5	1.5	2.1	
									4	7.0	4	5.5	4	5.5	1.5	2.1	
Do.....	1	1	40.8	Air	1	6	27	600	4	5.0	4	3.0	4	3.0	2.0	2.9	
									4	5.0	4	3.0	4	3.0	2.0	2.9	
									4	6.0	4	4.0	4	4.0	2.0	2.9	
Do.....	1	1	38.4	Air	1	6	25	800	4	5.0	4	3.0	4	3.0	2.0	2.9	
									4	6.0	4	3.5	4	3.5	2.5	3.6	Do.
									4	6.0	4	3.5	4	3.5	2.5	3.6	Do.
Do.....	1	1	38.4	Air	1	6	27	900	4	7.0	4	4.0	4	4.0	3.0	4.2	
									4	5.5	4	3.0	4	3.0	2.5	3.6	Do.
									4	6.0	4	3.0	4	3.0	3.0	4.3	Do.
Do.....	1	1	38.4	Air	1	6	27	1,000	4	6.5	4	3.0	4	3.0	3.5	5.0	
									4	6.0	4	3.0	4	3.0	3.0	4.3	Do.
Do.....	1	1	40.8	Water	1	7	8	200	4	13.0	4	12.5	4	12.5	.5	.6	
									4	13.5	4	12.5	4	12.5	1.0	1.3	
									4	12.5	4	12.0	4	12.0	.5	.7	
Do.....	1	1	40.8	Water	1	7	4	800	4	14.0	4	11.5	4	11.5	2.5	3.2	
									4	12.5	4	8.5	4	8.5	4.0	5.2	
									4	12.0	4	9.0	4	9.0	3.0	4.0	
Do.....	1	1	40.8	Water	1	7	5	400	4	11.0	4	8.0	4	8.0	8.0	10.7	
									4	12.5	4	5.0	4	5.0	7.5	9.8	
									4	13.5	4	8.0	4	8.0	6.5	10.2	
Do.....	1	1	40.8	Water	1	7	16	600	4	11.5	4	5	4	5	11.0	14.6	
									4	14.0	4	3.0	4	3.0	11.0	14.1	
									4	14.0	4	3.0	4	3.0	11.0	14.1	
									4	14.0	4	3.0	4	3.0	11.0	14.1	

Do.....	1	1	40.8	Water	1	7	17	800	4	18.0	4	1.0	12.0	15.6
			38.4		1	7	14		3	12.5	3	1.5	12.0	15.5
			38.4		1	7	14		4	12.5	4	.5	12.0	15.7
Do.....	1	1	38.4	Water	1	7	15	1,000	4	13.0	4	.5	12.5	16.2
									4	13.5	4	.5	13.0	16.8
									4	14.0	4	1.0	13.0	16.7
<b>Mankato</b> .....	Neat.		38.0	Air	1	2	5	200	3	12.0	3	11.5	.5	.8
									3	12.0	3	11.5	.5	.8
									3	12.0	3	10.0	2.0	3.8
Do.....	Neat.		38.0	Air	1	2	6	300	3	10.5	3	8.0	2.5	4.3
									3	11.5	3	8.0	3.5	5.9
									3	11.0	3	8.0	3.0	5.1
Do.....	Neat.		38.0	Air	1	2	7	400	3	12.5	3	8.0	4.5	7.4
									3	9.5	3	6.5	4.0	7.0
									3	9.0	3	5.5	3.5	6.1
Do.....	Neat.		48.0	Air	1	2	8	500	3	8.0	3	3.0	5.0	8.9
									3	8.0	3	3.5	4.5	8.0
									3	9.0	3	5.0	4.0	7.0
Do.....	Neat.		48.0	Air	1	2	10	600	3	8.0	3	2.0	6.0	10.7
									3	8.5	3	3.0	6.5	9.7
									3	9.5	3	4.0	5.5	9.6
Do.....	Neat.		48.0	Air	1	2	11	700	3	8.0	3	1.0	7.0	12.5
									3	8.0	3	2.5	6.8	9.8
									3	8.5	3	3.0	5.5	9.8
Do.....	Neat.		48.0	Air	1	2	12	800	3	8.0	3	1.5	6.5	11.6
									3	8.5	3	1.5	7.0	12.4
									3	9.5	3	1.0	8.5	14.8
Do.....	Neat.		48.0	Air	1	2	13	900	3	10.0	3	.5	9.5	16.4
									3	8.5	3	0.	8.5	13.0
Do.....	Neat.		38.0	Water	1	2	14	200	4	5.5	4	4.5	1.0	1.4
									4	5.5	4	4.5	1.0	1.4
									4	5.5	4	4.5	2.0	3.1
									4	5.5	4	14.0	2.5	3.9

Each of the neat Mankato cubes set in air showed cracks after heating.

Each of the neat Mankato cubes set in water showed cracks after heating; practically separating the specimens into irregular-shaped pieces when the higher temperatures were employed.

TABLE SHOWING LOSS IN WEIGHT OF 4-INCH CUBES UPON HEATING—Continued.

Brand of cement.	Composition.			Cubes set in—	Age.			Heated to temperature of— °F.	Weight of cubes.						Loss.	Remarks.					
	Cement.	Sand.	Water.		Years.	Months.	Days.		Before heating.		After heating.		Per ct.								
									Lbs.	Per cent.	Lbs.	Per cent.									
Mankato.....	Neat.	.....	Per cent.	Water .....	1	2	16	300	4.0	4.0	3	14.5	6.6	8.1							
			48.0						2.0	3	10.0	8.0	12.1								
			48.0						3.5	3	12.5	7.0	10.4								
Do.....	Neat.	.....	38.0	Water .....	1	2	17	400	4.0	4.0	3	10.5	9.5	14.0							
			48.0						4.5	3	11.0	9.5	13.9								
			48.0						4.0	3	11.0	9.0	13.2								
Do.....	Neat.	.....	38.0	Water .....	1	2	18	500	4.5	4.5	3	9.0	11.5	16.8							
			48.0						2.5	3	10.5	10.5	16.8								
			48.0						15.5	3	12.0	12.0	20.3								
Do.....	Neat.	.....	48.0	Water .....	1	2	19	600	3.0	3.0	3	4.5	14.5	21.6							
			48.0						2.0	3	3.0	13.0	22.7								
			48.0						4	3.0	4.0	16.0	22.4								
Do.....	Neat.	.....	48.0	Water .....	1	2	20	700	4.5	4.5	3	8.5	16.0	23.7							
			38.0						6.0	3	6.0	16.0	22.9								
			48.0						3.0	3	0	19.0	28.4								
Do.....	Neat.	.....	48.0	Water .....	1	2	21	800	4.5	4.5	3	0	16.5	27.8							
			48.0						3.0	3	2.0	17.0	26.4								
			38.0						4.0	3	6.0	14.0	20.6								
Do.....	Neat.	.....	38.0	Water .....	1	2	24	900	4.0	4.0	3	4.5	15.5	22.8							
			48.0						3.0	3	2.0	17.0	26.4								
			28.0						15.5	3	15.0	.5	.8								
Do.....	1	1	Air .....	1	5	29	200	.....	.....	.....	.....	.....	.....	.....	.....						
																.....	.....	.....	.....	.....	.....
																.....	.....	.....	.....	.....	.....
Do.....	1	1	Air .....	1	6	0	.....	.....	.....	.....	.....	.....	.....	.....	.....						
																.....	.....	.....	.....	.....	.....
																.....	.....	.....	.....	.....	.....
Do.....	1	1	Air .....	1	6	1	300	.....	.....	.....	.....	.....	.....	.....	.....						
																.....	.....	.....	.....	.....	.....
																.....	.....	.....	.....	.....	.....
Do.....	1	1	Air .....	1	6	1	500	.....	.....	.....	.....	.....	.....	.....	.....						
																.....	.....	.....	.....	.....	.....
																.....	.....	.....	.....	.....	.....

The Mankato 1:1 cubes set in air had slight surface cracks before heating. No new cracks developed upon heating.

CEMENTS. STRENGTH AFTER HEATING.

Do.....	1	1	28.0	Air.....	1	6	8	700	3	14.5	3	12.5	2.0	2.2
Do.....	1	1	31.0	Air.....	1	6	8	900	3	14.0	3	12.5	2.0	2.1
Do.....	1	1	31.0	Air.....	1	6	6	900	3	13.5	3	10.0	3.5	5.7
Do.....	1	1	31.0	Air.....	1	6	7	900	3	13.0	3	10.0	3.0	4.9
Do.....	1	1	31.0	Air.....	1	6	7	900	3	12.5	3	10.0	2.5	4.1
Do.....	1	1	31.0	Air.....	1	6	8	1,000	3	13.5	3	9.5	4.0	6.5
Do.....	1	1	31.0	Air.....	1	6	8	1,000	3	13.5	3	9.5	4.0	6.5
Do.....	1	1	28.0	Water.....	1	6	7	200	3	15.5	3	12.0	3.5	5.5
Do.....	1	1	31.0	Water.....	1	6	9	200	4	7.5	4	6.5	1.0	1.4
Do.....	1	1	31.0	Water.....	1	6	9	200	4	8.5	4	6.5	2.0	2.8
Do.....	1	1	31.0	Water.....	1	6	10	300	4	8.5	4	7.5	1.0	1.4
Do.....	1	1	31.0	Water.....	1	6	10	300	4	8.0	4	3.5	4.5	6.3
Do.....	1	1	28.0	Water.....	1	6	9	700	4	10.0	4	6.0	4.0	5.4
Do.....	1	1	31.0	Water.....	1	6	9	700	4	7.5	4	5.0	2.5	3.5
Do.....	1	1	28.0	Water.....	1	6	14	500	4	8.0	3	14.5	9.5	13.2
Do.....	1	1	28.0	Water.....	1	6	13	500	4	8.5	3	14.5	10.0	13.8
Do.....	1	1	28.0	Water.....	1	6	13	500	4	8.0	3	14.5	9.5	13.2
Do.....	1	1	28.0	Water.....	1	6	14	700	4	9.0	3	12.0	13.0	17.8
Do.....	1	1	28.0	Water.....	1	6	14	700	4	9.0	3	12.5	12.5	17.1
Do.....	1	1	28.0	Water.....	1	6	14	700	4	9.0	3	13.0	12.0	16.5
Do.....	1	1	31.0	Water.....	1	6	16	900	3	9.0	3	10.0	15.0	20.6
Do.....	1	1	28.0	Water.....	1	6	15	900	3	9.0	3	10.5	14.5	19.9
Do.....	1	1	28.0	Water.....	1	6	15	900	3	9.0	3	10.5	14.5	19.9
Do.....	1	1	28.0	Water.....	1	6	15	900	3	9.0	3	10.5	14.5	19.9
Do.....	1	1	28.0	Water.....	1	6	16	1,000	4	9.5	3	10.5	15.0	20.2
Do.....	1	1	28.0	Water.....	1	6	16	1,000	4	10.0	3	11.0	15.0	20.1
Do.....	1	1	28.0	Water.....	1	6	16	1,000	4	11.0	3	11.5	15.5	20.7

No cracks visible after heating.

Do.

Cracked by heat.

Do.

Do.

Do.

COMPRESSION TESTS OF CEMENT CUBES AFTER HAVING BEEN HEATED TO DIFFERENT TEMPERATURES.

Brand of cement, Alpha.  
Cubes set in air before heating.

Marks.	Composition.			Age.			Treatment, heated to—	Dimensions.			Sec-tional area.	First crack.	Compressive strength.		Remarks.				
	Ce-ment.	Sand.	Water.	Year.	Mos.	Days.		Mos.	Days.	After heating.			Height.	Inches.		Inches.	Compressed surface.	Total.	Per square inch.
A 14	Neat.	.....	.....	1	1	16	Not heated	3.97	4.05	4.02	16.28	152,100	Pounds.	9,340					
							do	3.98	4.00	4.04	16.16	153,200	Pounds.	9,590					
							do	4.01	3.98	4.08	16.04	137,000	Pounds.	8,570					
Do	Neat.	.....	.....	1	1	16	200° F	4.01	3.97	4.05	16.08	114,000	Pounds.	7,920					
							do	3.97	4.00	4.04	16.16	135,000	Pounds.	9,650					
							do	4.03	3.98	4.06	16.16	139,000	Pounds.	8,920					
Do	Neat.	.....	.....	1	1	15	300° F	3.97	4.03	4.00	16.12	129,900	Pounds.	8,130					
							do	3.99	4.02	4.00	16.08	117,000	Pounds.	7,970					
							do	3.98	4.06	4.00	16.24	124,400	Pounds.	7,660					
Do	Neat.	.....	.....	1	18	28	400° F	4.08	3.97	3.97	15.76	143,600	Pounds.	8,670					
							do	4.02	4.02	4.02	15.96	117,000	Pounds.	8,520					
							do	3.98	4.01	4.02	16.12	151,200	Pounds.	9,380					
Do	Neat.	.....	.....	1	19	27	500° F	4.00	3.98	4.03	16.04	143,500	Pounds.	9,010					
							do	4.01	3.97	3.99	15.84	149,300	Pounds.	9,480					
							do	4.02	3.99	4.00	15.96	139,000	Pounds.	8,880					
Do	Neat.	.....	.....	1	22	24	600° F	4.01	3.99	3.98	15.88	124,000	Pounds.	9,100					
							do	4.01	3.98	4.01	15.96	151,000	Pounds.	10,080					
							do	3.96	4.00	4.03	16.12	141,600	Pounds.	8,810					
Do	Neat.	.....	.....	1	20	26	700° F	3.96	4.02	4.00	16.06	116,000	Pounds.	8,640					
							do	4.01	3.98	4.01	15.88	111,000	Pounds.	7,980					
							do	3.96	4.01	4.01	16.08	129,000	Pounds.	8,980					
Do	Neat.	.....	.....	1	21	25	800° F	4.02	3.95	4.00	15.80	124,500	Pounds.	9,010					
							do	4.03	3.96	4.01	15.88	74,000	Pounds.	7,890					
							do	3.94	4.00	4.01	16.04	96,000	Pounds.	7,290					
Do	Neat.	.....	.....	1	23	23	900° F	4.01	4.01	3.96	15.88	59,000	Pounds.	6,060					



The following cubes were set in water before heating:

A 12	Neat	24.0	1	1	19	Not heated	4.11	4.06	8.94	16.00	215,000	215,800	13,490
A 13	Neat	24.0	1	1	18	do	4.05	4.09	8.90	15.95	204,000	207,000	12,940
	Do	24.0	1	1	18	do	4.07	4.10	8.96	16.82	162,000	179,100	10,970
A 12	Neat	24.0	1	1	26	230° F	4.02	4.06	3.97	16.20	257,000	259,000	15,990
A 13	Neat	24.0	1	1	25	do	4.05	4.08	3.92	15.99	171,000	193,000	12,070
A 12	Neat	24.0	1	1	28	300° F	4.01	4.06	3.98	16.16	220,000	220,000	13,610
A 13	Neat	24.0	1	1	27	do	4.05	4.04	4.00	16.16	228,000	232,500	14,990
A 12	Neat	24.0	1	1	28	400° F	4.07	4.06	3.88	15.75	233,000	239,500	15,210
A 13	Neat	24.0	1	1	28	do	4.10	4.05	3.97	16.08	160,000	211,600	19,160
A 12	Neat	24.0	1	1	29	500° F	4.08	4.08	3.96	16.12	213,000	245,000	16,200
A 13	Neat	24.0	1	1	29	do	4.04	4.03	3.99	16.08	201,000	211,200	13,180
A 12	Neat	24.0	1	1	29	600° F	4.01	4.02	3.99	16.04	186,000	187,000	11,660
A 13	Neat	24.0	1	1	29	do	4.01	4.00	3.99	15.96	220,100	220,100	13,790
A 12	Neat	24.0	1	1	29	700° F	4.00	4.04	3.97	16.04	185,000	189,000	11,790
A 13	Neat	24.0	1	1	29	do	4.03	4.06	3.94	16.00	174,100	174,100	10,860
A 12	Neat	24.0	1	1	2	800° F	4.03	4.04	3.92	15.84	238,500	233,500	14,740
A 13	Neat	24.0	1	1	1	do	4.06	3.98	3.94	15.68	156,800	156,800	9,970
	Neat	24.0	1	1	1	do	4.06	3.98	3.94	15.68	156,800	156,800	10,000

Sustained load 1/2 minute, then fractured.

Sustained load 1/2 minute, then fractured.

Corner gone.

Brand of cement, Dyckerhoff.  
Cubes set in air before heating.

Marks.	Composition.			Age.			Treatment, heated to—	Dimensions.			Sectional area.	First crack.	Compressive strength.		Remarks.
	Cement.	Sand.	Water.	Yrs.	Mos.	Days.		Before heating.	After heating.	Height.			Compressed surface.	Sq. ins.	
D. 19.....	Neat.	.....	23.0	1	6	29	.....	.....	4.01	3.98	16.28	76,000	76,500	4,640	The heated cubes developed cracks which were more numerous and wider as higher temperatures were reached during the period of heating.
Do.....	Neat.	.....	23.0	1	6	29	.....	.....	4.04	3.99	16.00	86,700	86,700	5,420	
Do.....	Neat.	.....	23.0	1	6	29	.....	.....	4.06	3.99	16.08	80,800	80,800	4,990	
D. 20.....	Neat.	.....	23.0	1	3	13	3	10	3.91	4.04	16.44	58,000	66,800	4,060	
Do.....	Neat.	.....	23.0	1	3	13	3	10	4.07	3.96	16.88	69,800	69,800	4,400	
Do.....	Neat.	.....	23.0	1	3	13	3	10	4.10	3.96	13.84	72,500	72,500	4,580	
Do.....	Neat.	.....	23.0	1	3	16	3	12	3.91	4.02	16.16	49,700	49,700	3,080	
Do.....	Neat.	.....	23.0	1	3	16	3	12	4.07	4.03	13.86	57,900	57,900	3,630	
Do.....	Neat.	.....	23.0	1	3	16	3	12	4.06	4.02	13.88	56,400	59,400	3,740	
D. 19.....	Neat.	.....	23.0	1	3	5	3	24	4.02	3.96	15.04	70,100	70,100	4,870	
D. 20.....	Neat.	.....	23.0	1	3	4	3	24	4.08	3.96	15.88	59,300	59,300	3,730	
Do.....	Neat.	.....	23.0	1	3	4	3	24	4.04	3.97	15.60	64,400	75,800	4,740	

The following cubes set in water before heating:

D. 19.....	Neat.	.....	23.0	1	3	2	3	27	900° F	.....	4.00	3.97	4.09	62,000	109,900	6,770	Cracked during heating.
Do.....	Neat.	.....	23.0	1	3	2	3	27	.....	.....	3.96	3.99	4.04	140,500	140,500	8,720	

One specimen heated to 900° and 3 specimens to 1,000° F. rejected on account of being badly cracked.

Brand of cement, Steel.  
Cubes set in air before heating.

Marks.	Composition.			Age.			Treatment, heated to—	Dimensions.			Sec-tional area.	First crack.	Compressive strength.		Remarks.
	Ce-ment.	Sand.	Water.	Before heating.		After heat-ing.		Height.	Compressed surface.				Pounds.	Per square inch.	
				Year.	Mos.	Days.			Mos.	Days.					
S. 15.....	Neat.	.....	28.0	1	2	7	.....	4.04	3.97	4.03	16.00	Pounds.	44,000	2,750	
							Not heated..	4.08	3.94	4.03	15.88		42,100	2,650	
							.....do.....	4.02	3.93	4.01	15.76		42,800	2,720	
Do.....	Neat.	.....	28.0	1	1	1	6 200° F.....	4.04	3.99	4.06	16.20		42,100	2,600	
							.....do.....	4.08	4.01	3.97	15.92		39,600	2,490	
							.....do.....	4.01	4.06	3.96	16.08		46,200	2,870	
Do.....	Neat.	.....	28.0	1	1	2	5 300° F.....	3.97	4.03	4.01	16.16		52,500	3,250	
							.....do.....	4.01	4.00	3.98	15.92		52,200	3,280	
							.....do.....	3.99	4.04	3.95	15.96		49,100	3,080	
Do.....	Neat.	.....	28.0	1	1	5	2 400° F.....	4.05	4.06	3.97	16.12		45,900	2,850	
							.....do.....	4.06	3.93	4.01	15.76		54,600	3,460	
							.....do.....	4.01	3.98	4.02	16.00		47,500	3,540	
Do.....	Neat.	.....	28.0	1	1	22	15 500° F.....	3.96	4.00	3.99	15.96		48,600	3,060	
							.....do.....	4.00	3.98	4.06	16.12		50,700	3,150	
							.....do.....	3.96	4.00	4.02	16.08		51,000	3,170	
Do.....	Neat.	.....	28.0	1	1	23	15 600° F.....	3.95	4.00	4.03	16.12		60,100	3,870	
							.....do.....	3.98	4.00	4.00	16.00		67,700	4,230	
							.....do.....	3.96	3.96	4.05	16.00		57,000	3,850	
Do.....	Neat.	.....	28.0	1	1	24	14 700° F.....	3.93	4.00	4.00	16.00		35,000	3,160	
							.....do.....	4.00	3.97	3.99	16.03		39,200	3,440	
							.....do.....	3.96	3.99	4.06	16.16		36,500	3,040	
Do.....	Neat.	.....	28.0	1	1	25	13 800° F.....	3.99	4.00	3.95	15.90		53,900	3,410	
							.....do.....	3.98	3.92	4.03	15.96		48,400	2,900	
							.....do.....	4.02	3.98	3.94	15.63		37,600	2,180	
Do.....	Neat.	.....	28.0	1	1	26	12 900° F.....	3.98	4.10	3.93	16.11		36,900	2,820	

The following cubes were set in water before heating:

Marks.	Composition.		Age.			Treatment heated to—	Dimensions.		Sec-tional area.	First crack.	Compressive strength.		Remarks.
	Ce-ment.	Sand.	Water.	Before heating.	After heat-ing.		Height.	Compressed surface.			Total.	Per square inch.	
			Yrs.	Mos.	Days.		Inches.	Inches.	Sq. ins.	Pounds.	Pounds.		
S 15.....	Neat.	.....	1	2	20	Not heated	4.05	3.99	16.24	68,200	68,200	3,890	
							4.02	3.98	16.40	58,100	58,100	3,540	
							4.05	3.98	16.12	62,800	62,800	3,900	
Do.....	Neat.	.....	1	1	22	200° F.	4.04	3.98	16.12	68,500	68,500	3,940	
							4.05	3.99	16.24	59,400	59,400	3,660	
							4.02	3.99	16.16	60,500	60,500	3,780	
Do.....	Neat.	.....	1	1	21	300° F.	3.98	4.01	16.12	50,300	50,300	3,100	
							4.04	3.98	16.22	41,000	41,000	2,050	
							4.00	4.01	16.04	51,900	51,900	3,300	
Do.....	Neat.	.....	1	2	0	400° F.	3.98	4.07	16.28	51,000	54,500	3,350	
							4.08	3.99	16.00	46,200	46,200	2,890	
							4.05	3.99	16.24	53,500	58,200	3,400	
Do.....	Neat.	.....	1	2	1	500° F.	3.98	4.03	16.44	55,900	55,900	3,400	
							4.03	3.99	16.12	46,600	50,500	3,180	
							4.04	3.98	16.20	58,400	58,400	3,600	
Do.....	Neat.	.....	1	2	2	600° F.	4.01	3.97	16.28	45,000	50,400	3,100	
							3.99	4.06	16.24	66,000	67,800	4,170	
							4.04	3.98	16.08	62,000	68,100	3,920	
Do.....	Neat.	.....	1	2	3	700° F.	4.03	3.97	15.92	58,000	62,000	3,890	
							4.01	3.94	15.96	55,200	61,000	3,820	
							3.98	4.00	16.32	56,000	61,500	3,770	
Do.....	Neat.	.....	1	2	6	800° F.	4.05	3.97	15.88	42,000	47,000	2,980	Split cube.
							3.97	4.02	16.16	49,000	60,000	3,710	
							4.02	3.97	15.88	58,600	60,400	3,800	
Do.....	Neat.	.....	1	2	6	900° F.	3.95	4.00	16.12	45,400	54,600	3,380	

Brand of cement, Mankato. Cubes set in air before heating.

Marks.	Composition.				Age.				Treatment, heated to—	Dimensions.		First crack.	Compressive strength.		Remarks.		
	Cement.	Sand.		Water.		Before heating.		After heating.		Height.	Compressed surface.		Sec-tional area.	Total.		Per square inch.	
		Per cent.	Yrs.	Mos.	Days.	Mos.	Days.	Mos.									Days.
M 16	Neat.	38.0	1	2	19												
								Not heated									
								do.									
								do.									
Do	Neat.	38.0	1	2	5			14 200° F.									
								do.									
								do.									
Do	Neat.	38.0	1	2	6			13 300° F.									
								do.									
								do.									
Do	Neat.	38.0	1	2	7			12 400° F.									
								do.									
								do.									
M 17	Neat.	48.0	1	2	8			11 500° F.									
								do.									
								do.									
Do	Neat.	48.0	1	2	10			9 600° F.									
								do.									
								do.									
Do	Neat.	48.0	1	2	11			8 700° F.									
								do.									
								do.									
Do	Neat.	48.0	1	2	12			7 800° F.									
								do.									
								do.									
Do	Neat.	48.0	1	2	13			6 900° F.									
								do.									
								do.									

The above cubes developed cracks while heating. The first cracks noted in the tests were new cracks or the extension of the initial ones.

The following cubes set in water before heating:

Marks.	Composition.			Age.			Treatment heated to—	Dimensions.			Sec-tional area.	First crack.	Compressive strength.		Remarks.
	Ce-ment.	Sand.	Water.	Before heating.		After heat-ing.		Height.	Compressed surface.				Total.	Per square inch.	
				Yrs.	Mo.				Days.	Inches.					
M 16	Neat.	.....	Per ct.	1	4	3	Not heated	4.10	4.08	16.73	Pounds.	66,700	3,960		
M 17	Neat.	.....	38.0	1	4	3	do	4.06	4.11	16.44	62,100	64,500	3,920		
Do.	Neat.	.....	48.0	1	4	3	do	4.08	4.00	16.40	57,800	60,800	3,710		
M 16	Neat.	.....	38.0	1	2	14	200° F	4.00	4.06	16.61	68,600	72,400	4,360		
M 17	Neat.	.....	48.0	1	2	14	do	3.99	4.05	16.69	62,800	64,200	3,850		
Do.	Neat.	.....	48.0	1	2	14	do	4.06	4.09	16.36	68,500	64,200	3,920		
M 16	Neat.	.....	38.0	1	2	15	300° F	4.00	4.08	16.58	51,000	58,000	3,440		
M 17	Neat.	.....	48.0	1	2	15	do	4.07	4.00	16.56	56,500	58,800	3,560		
Do.	Neat.	.....	48.0	1	2	15	do	4.01	4.08	16.86	56,700	59,100	3,570		
M 16	Neat.	.....	38.0	1	2	17	400° F	4.06	4.00	16.24	66,100	66,100	4,070		
Do.	Neat.	.....	38.0	1	2	17	do	4.00	4.08	16.56	62,200	62,200	3,760		
Do.	Neat.	.....	38.0	1	2	17	do	4.08	4.06	16.90	57,800	59,700	3,600		
M 16	Neat.	.....	38.0	1	2	18	500° F	4.00	4.10	16.48	72,000	72,000	4,370		
M 17	Neat.	.....	48.0	1	2	18	do	4.00	4.02	16.48	68,800	65,500	3,970		
Do.	Neat.	.....	48.0	1	2	19	do	4.07	4.01	16.86	66,400	66,400	4,060		
Do.	Neat.	.....	48.0	1	2	19	600° F	4.04	4.06	16.28	67,000	67,200	4,130		
Do.	Neat.	.....	48.0	1	2	19	do	4.02	4.06	16.52	60,800	60,800	3,680		
Do.	Neat.	.....	48.0	1	2	20	do	4.09	3.98	16.16	41,000	68,900	4,280		
M 16	Neat.	.....	38.0	1	2	20	700° F	4.10	4.00	16.28	73,000	78,200	4,800		
M 17	Neat.	.....	48.0	1	2	20	do	4.03	4.00	16.40	68,000	66,000	4,020		
Do.	Neat.	.....	48.0	1	2	20	do	3.98	4.05	16.24	11,000	49,500	3,050		
M 16	Neat.	.....	38.0	1	2	21	800° F	4.08	4.09	16.86	41,000	41,000	4,360		
M 17	Neat.	.....	48.0	1	2	21	do	3.99	4.06	16.44	54,000	51,600	3,760		
Do.	Neat.	.....	48.0	1	2	21	do	4.05	3.99	16.20	58,300	58,300	3,600		
M 16	Neat.	.....	38.0	1	2	24	900° F	3.99	4.06	16.28	39,000	65,000	3,990		
M 17	Neat.	.....	48.0	1	2	24	do	4.01	4.01	16.06	29,000	32,000	1,990		

The above cubes, which set in water, after heating developed cracks practically separating the specimens into irregular shaped pieces. These cracks became wider and more numerous as the temperature to which the samples were heated increased. The first cracks referred to in the tests indicate the development of additional cracks due to the applied stresses.

The following cubes set in air before heating:

Marks.	Composition.			Age.			Treatment, heated to —	Dimensions.			Sec. tional area.	First crack.	Compressive strength.		Remarks.
	Ce-ment.	Sand.	Water.	Before heating.	After heat-ing.			Height.	Compressed surface.	Pounds.			Per square inch.		
M. 28	1	1	Per ct. 28.0	Yrs. 1	Mo. 6	Days 21	Not heated	Inches. 4.04	Inches. 3.99	Sq. ins. 16.32	Pounds. 8,600	Pounds. 526	This specimen was placed on a wet floor after heating and absorbed some water. It was in a damp state when tested.		
Do.	1	1	28.0	1	6	21	do.	4.07	4.04	16.44	8,100	493			
Do.	1	1	28.0	1	6	21	do.	3.98	4.04	16.46	8,900	540			
Do.	1	1	28.0	1	6	21	do.	4.02	3.98	16.36	9,700	568			
M. 27	1	1	31.0	1	6	22	200° F.	3.96	4.04	16.52	7,080	429	Do.		
M. 28	1	1	28.0	1	5	23	do.	3.97	4.06	16.69	7,300	437			
M. 27	1	1	31.0	1	6	21	do.	4.05	3.97	16.12	9,300	608			
Do.	1	1	31.0	1	6	1	300° F.	4.03	3.97	16.06	6,670	415	Do.		
Do.	1	1	31.0	1	6	1	do.	4.02	3.96	16.04	7,240	451			
Do.	1	1	31.0	1	6	1	do.	4.06	3.96	16.24	7,020	432			
M. 28	1	1	28.0	1	6	1	500° F.	3.96	4.03	16.60	6,780	405	Do.		
Do.	1	1	28.0	1	6	1	do.	4.01	3.97	16.28	7,680	472			
Do.	1	1	28.0	1	6	3	do.	3.97	4.04	16.56	8,900	537			
Do.	1	1	28.0	1	6	3	700° F.	3.96	3.99	16.40	5,920	361	Do.		
Do.	1	1	28.0	1	6	3	do.	3.95	4.03	16.76	5,780	352			
Do.	1	1	28.0	1	6	5	do.	4.01	3.94	16.19	6,400	400			
M. 27	1	1	31.0	1	6	6	900° F.	4.02	3.96	16.92	3,400	239	Do.		
Do.	1	1	31.0	1	6	7	do.	4.02	3.97	16.06	2,700	260			
Do.	1	1	31.0	1	6	7	do.	3.96	3.99	16.20	7,200	463			
Do.	1	1	31.0	1	6	8	1,000° F.	3.97	4.01	16.32	3,960	242	Do.		
Do.	1	1	31.0	1	6	8	do.	4.00	3.98	16.28	4,400	253			
M. 28	1	1	28.0	1	6	7	do.	3.97	4.04	16.69	7,700	461			

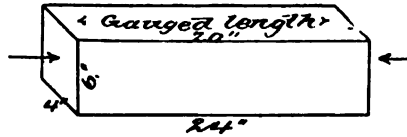
The following cubes set in water before heating.

Marks.	Composition.		Age.			Treatment, heated to—	Dimensions.		Sec-tional area.	First crack.	Compressive strength.		Remarks.
	Ce-ment.	Sand.	Water.	Before heating.			Height.	Compressed surface.			Total.	Per square inch.	
				Yrs.	Mos.								
M 27	1	1	Per ct.	1	6	21	3.99	4.08	16.32	39,200	2,400		
Do	1	1	31.0	1	6	21	4.04	4.02	16.44	31,200	2,080		
Do	1	1	31.0	1	6	21	3.99	4.08	16.56	33,100	2,000		
M 28	1	1	28.0	1	6	20	4.02	4.10	3.98	35,700	2,190		
M 27	1	1	31.0	1	6	9	3.99	4.03	4.09	35,400	2,150		
Do	1	1	31.0	1	6	9	4.00	4.11	16.65	30,200	1,960		
Do	1	1	31.0	1	6	9	4.00	4.09	16.69	34,600	2,070		
M 28	1	1	28.0	1	6	9	4.02	4.03	4.15	31,000	1,850		
M 27	1	1	31.0	1	6	10	4.05	4.09	16.36	32,200	1,970		
Do	1	1	31.0	1	6	10	4.00	4.01	16.40	33,400	2,040		
M 28	1	1	28.0	1	6	13	4.01	4.15	16.64	37,600	2,260		
Do	1	1	28.0	1	6	13	4.00	4.01	16.60	29,200	1,760		
M 27	1	1	31.0	1	6	14	4.00	4.06	16.65	36,100	2,170		
M 28	1	1	28.0	1	6	14	4.03	3.98	16.40	27,000	1,650		
Do	1	1	28.0	1	6	14	4.03	3.99	16.48	34,500	2,200		
Do	1	1	28.0	1	6	14	4.00	4.04	16.56	47,500	2,870		
M 27	1	1	31.0	1	6	16	3.97	4.07	16.65	21,400	35,200	Sides flaked off.	
Do	1	1	31.0	1	6	15	3.96	4.01	16.64	11,000	1,710	Do.	
M 28	1	1	28.0	1	6	15	3.96	4.05	16.65	24,100	24,600	Do.	
Do	1	1	28.0	1	6	16	4.06	3.96	16.24	10,000	26,200	Do.	
Do	1	1	28.0	1	6	16	4.08	3.98	16.40	30,100	1,840	Do.	
Do	1	1	28.0	1	6	16	4.03	4.00	16.48	13,000	27,100	Do.	



CEMENT AND MORTAR PRISMS—COMPRESSIVE ELASTIC PROPERTIES.

CEMENT AND MORTAR PRISMS.



No. 1468.

Marks, Alp. March 8.

Composition: Alpha cement, neat.

Water used in gauging, 21.9 per cent of cement.

Age, set in air, 1 month.

Weight per cubic foot, 135.5 pounds.

Dimensions, 23'.94 × 3'.84 × 6'.

Sectional area, 23.04 square inches.

Gauged length, 20'.

The cement was lumpy in the barrel.

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
2,804	100	0.	0.	Initial load.	
4,608	200	.0008	.0001		
6,912	300	.0014	.0001		
9,216	400	.0020	.0001		
11,520	500	.0028	.0001		
13,824	600	.0034	.0001		
16,128	700	.0042	.0001		
18,432	800	.0048	.0001		
20,736	900	.0056	.0001		
23,040	1,000	.0061	0.		
27,648	1,200	.0075	-.0001		
32,256	1,400	.0089	0.		
36,864	1,600	.0101	0.		
41,472	1,800	.0115	.0002		
46,080	2,000	.0131	.0004		E (500-2,000) = 3,000,000 pounds per square inch.
50,688	2,200	.0146	.0006		
55,296	2,400	.0161	.0008		
59,904	2,600	.0177	.0010		
64,512	2,800	.0192	.0014	E (500-3,000) = 3,030,000 pounds per square inch.	
69,120	3,000	.0208	.0016		

Test discontinued.

No. 1468a.

Test resumed after an interval of 6 months.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,304	100	0.	0.	Micrometer reset at zero.
11,520	500	.0028	.0001	
23,040	1,000	.0060	.0004	
36,864	1,600	.0097	.0006	
46,080	2,000	.0121	.0008	E (500-2,000)=3,488,000 pounds per square inch.
59,904	2,600	.0158	.0010	
69,120	3,000	.0181	.0010	
82,944	3,600	.0224	.0013	
92,160	4,000	.0250	.0015	E (2,000-4,000)=3,279,000 pounds per square inch.
105,984	4,600	.0288	.0019	
115,200	5,000	.0325	.0026	
129,024	5,600	.0370	.0031	Cracked along edge.
138,240	6,000	.0406	.0036	E (4,000-6,000)=2,968,000 pounds per square inch.
152,064	6,600	.0483	.0045	
196,500	8,580	.....	.....	Ultimate strength.

No. 1474.

Marks, Alp. April 26.

Composition: Alpha cement, neat.

Water used in gauging, 21.9 per cent of cement.

Age, set in water, 1 month. (First 2 days in air.)

Weight per cubic foot (immediately after being taken from the water), 137.3 pounds.

Dimensions, 24".05 × 3".85 × 6".08.

Sectional area, 23.4 square inches.

Gauged length, 20".

The cement was lumpy in the barrel. Prism had a crack along one edge when taken from the mold.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,340	100	0.	0.	Initial load.
4,680	200	.0001	0.	
7,020	300	.0003	0.	
9,360	400	.0006	0.	
11,700	500	.0011	0.	
14,040	600	.0016	0.	
16,380	700	.0023	.0001	
18,720	800	.0030	.0001	
21,060	900	.0035	.0002	
23,400	1,000	.0046	.0004	
25,740	1,200	.0064	.0008	
28,080	1,400	.0078	.0009	
37,440	1,600	.0095	.0011	
42,120	1,800	.0109	.0012	
46,800	2,000	.0121	.0012	E (500-2,000)=3,061,000 pounds per square inch.
51,480	2,200	.0136	.0014	
56,160	2,400	.0149	.0015	
60,840	2,600	.0164	.0016	
65,520	2,800	.0179	.0018	

No. 1474—Continued.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i> 70,200	<i>Pounds.</i> 3,000	<i>Inch.</i> .0192	<i>Inch.</i> .0019	
	200	.0025		
	600	.0051		
	1,000	.0075		
	1,400	.0101		
	1,800	.0125		
	2,200	.0149		
	2,600	.0172		
	2,200	.0152		
	1,800	.0131		
	1,400	.0099		
	1,000	.0066		
	600	.0059		
	200	.0031	.0019	
	200	.0024		
	600	.0051		
	1,000	.0077		
	1,400	.0102		
	1,800	.0126		
	2,200	.0150		
	2,600	.0173		
	2,200	.0153		
	1,800	.0132		
	1,400	.0110		
	1,000	.0086		
	600	.0061		
	200	.0030	.0018	Prism returned to water bath.

Test discontinued.

No. 1474a.

Test resumed after an interval of 4 months.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i> 2,340	<i>Pounds.</i> 100	<i>Inch.</i> 0.	<i>Inch.</i> 0.	Micrometer reset at zero.
11,700	500	.0016	0.	
23,400	1,000	.0038	0.	
37,440	1,600	.0064	0.	
46,800	2,000	.0082	0.	E (500-2,000) = 4,545,000 pounds per square inch.
60,840	2,600	.0109	0.	
70,200	3,000	.0128	0.	
84,240	3,600	.0156	.0001	
98,600	4,000	.0177	.0001	E (2,000-4,000) = 4,255,000 pounds per square inch.
107,640	4,600	.0205	.0002	
117,000	5,000	.0226	.0003	
131,040	5,600	.0263	.0006	Cracked along edge.
140,400	6,000	.0288	.0008	E (4,000-6,000) = 3,846,000 pounds per square inch.
216,700	9,260	.....	.....	Ultimate strength.

No. 1471.

Marks, Atl. March 13.

Composition: Atlas cement, neat.

Water used in gauging, 21.9 per cent of cement.

Age, set in air, 2 months 16 days.

Weight per cubic foot, 134.7 pounds.

Dimensions, 23".98 × 3".87 × 6".02.

Sectional area, 23.3 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,380	100	0.	0.	Initial load.
4,660	200	.0013	.0002	
6,990	300	.0026	.0008	
9,320	400	.0039	.0005	
11,650	500	.0051	.0006	
13,980	600	.0062	.0007	
16,310	700	.0075	.0008	
18,640	800	.0086	.0009	
20,970	900	.0097	.0010	
23,300	1,000	.0105	.0012	
27,960	1,200	.0125	.0012	
32,620	1,400	.0142	.0013	
37,280	1,600	.0160	.0014	
41,940	1,800	.0177	.0016	
46,600	2,000	.0198	.0019	E (500-2,000) = 2,326,000 pounds per square inch.
51,260	2,200	.0210	.0024	
55,920	2,400	.0230	.0027	
60,580	2,600	.0248	.0032	
65,240	2,800	.0270	.0039	
69,900	3,000	.0291	.0045	
.....	3,000	.0287	.0042	After resting 1 hour.
.....	200	.0050	.....	
.....	400	.0075	.....	
.....	600	.0098	.....	
.....	800	.0114	.....	
.....	1,000	.0134	.....	
.....	1,200	.0153	.....	
.....	1,400	.0169	.....	
.....	1,600	.0186	.....	
.....	1,800	.0201	.....	
.....	2,000	.0217	.....	
.....	2,200	.0233	.....	
.....	2,400	.0250	.....	
.....	2,200	.0238	.....	
.....	2,000	.0225	.....	
.....	1,800	.0211	.....	
.....	1,600	.0198	.....	
.....	1,400	.0183	.....	
.....	1,200	.0168	.....	
.....	1,000	.0151	.....	
.....	800	.0133	.....	
.....	600	.0112	.....	
.....	400	.0091	.....	
.....	200	.0066	.0050	
.....	.....	.....	.0045	After resting 5 minutes.

Test discontinued.

No. 1471a.

Test resumed after an interval of 4 months.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,350	100	0.	0.	Micrometer reset at zero.
11,650	500	.0044	.0001	
23,800	1,000	.0093	.0005	
37,250	1,600	.0143	.0009	
46,600	2,000	.0175	.0011	E (500-2,000) = 2,479,000 pounds per square inch.
60,580	2,600	.0225	.0016	
69,900	3,000	.0259	.0020	
83,880	3,600	.0315	.0031	E (2,000-4,000) = 2,581,000 pounds per square inch.
93,200	4,000	.0359	.0040	
107,180	4,600	.0423	.0052	
116,500	5,000	.0483	.0074	
127,000	5,460			Ultimate strength.

No. 1499.

Marks, L. July 14.

Composition: Lehigh cement, neat.

Water used in gauging, 27 per cent of cement.

Age, set in air, 1 month 26 days.

Weight per cubic foot, 129.2 pounds.

Dimensions, 24".03 x 3".90 x 6".03.

Sectional area, 23.52 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,352	100	0.	0.	Initial load.
4,704	200	.0011	0.	
7,056	300	.0024	.0002	
9,408	400	.0035	.0004	
11,760	500	.0046	.0005	
14,112	600	.0060	.0006	
16,464	700	.0069	.0008	
18,816	800	.0080	.0009	
21,168	900	.0090	.0009	
23,520	1,000	.0100	.0011	
	200	.0022		
	400	.0045		
	600	.0067		
	800	.0085		
	600	.0068		
	400	.0048		
	200	.0025	.0013	
28,224	1,200	.0119	.0013	
32,928	1,400	.0135	.0016	
37,632	1,600	.0151	.0019	
42,336	1,800	.0168	.0022	
47,040	2,000	.0186	.0025	E (500-2,000) = 2,500,000 pounds per square inch.
	200	.0035		
	400	.0057		
	600	.0078		
	800	.0095		
	600	.0080		
	400	.0060		
	200	.0036	.0025	

## No. 1499—Continued.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
51,744	2,200	.0204	.0027	
56,448	2,400	.0222	.0032	
61,152	2,600	.0246	.0037	
66,856	2,800	.0262	.0040	
70,560	3,000	.0288	.0044	
.....	200	.0064	.....	
.....	400	.0075	.....	
.....	600	.0095	.....	
.....	800	.0118	.....	
.....	600	.0097	.....	
.....	400	.0078	.....	
.....	200	.0055	.0041	
.....	200	.0051	.....	
.....	400	.0073	.....	
.....	800	.0112	.....	
.....	1,200	.0144	.....	
.....	1,600	.0174	.....	
.....	2,000	.0205	.....	
.....	1,600	.0178	.....	
.....	1,200	.0150	.....	
.....	800	.0120	.....	
.....	400	.0080	.....	
.....	200	.0057	.0044	
75,264	3,200	.0805	.0049	Crack at corner.
79,968	3,400	.0829	.0055	
84,672	3,600	.0852	.0059	
89,376	3,800	.0877	.0066	
94,080	4,000	.0408	.0072	E (2,000-4,000)=2,353,000 pounds per square inch.
.....	.....	.....	.0065	After 5 minutes.
.....	200	.0076	.....	
.....	400	.0100	.....	
.....	600	.0120	.....	
.....	800	.0139	.....	
.....	600	.0122	.....	
.....	400	.0102	.....	
.....	200	.0079	.0066	
136,300	5,800	.....	.....	Ultimate strength.



## No. 1501

Marks, L. July 16.

Composition: Lehigh cement, neat.

Water used in gauging, 25 per cent of cement.

Age, set in water, 1 month, 26 days.

Weight per cubic foot, 135.9 pounds.

Dimensions, 24".13 × 3".93 × 6".06.

Sectional area, 23.82 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,322	100	0.	0.	Initial load.
4,764	200	.0008	0.	
7,146	300	.0008	0.	
9,528	400	.0011	0.	
11,910	500	.0014	0.	
14,292	600	.0019	0.	
16,674	700	.0025	0.	
19,056	800	.0028	0.	
21,438	900	.0031	0.	
23,820	1,000	.0036	0.	
26,204	1,200	.0045	0.	
28,584	1,400	.0054	0.	
30,968	1,600	.0064	0.	
33,352	1,800	.0073	0.	
35,736	2,000	.0083	0.	
.....	200	.0008	.....	
.....	400	.0008	.....	
.....	600	.0016	.....	
.....	800	.0025	.....	
.....	1,000	.0035	.....	
.....	1,200	.0045	.....	
.....	1,400	.0055	.....	
.....	1,600	.0064	.....	
.....	1,400	.0054	.....	
.....	1,200	.0045	.....	
.....	1,000	.0035	.....	
.....	800	.0028	.....	
.....	600	.0017	.....	
.....	400	.0008	.....	
.....	200	.0001	0.	
52,404	2,200	.0091	0.	E(2,000-3,000) = 4,444,000 pounds persquare inch.
57,168	2,400	.0100	.0001	
61,932	2,600	.0111	.0001	
66,696	2,800	.0119	.0001	
71,460	3,000	.0129	.0001	
.....	600	.0013	.....	
.....	1,000	.0031	.....	
.....	1,600	.0059	.....	
.....	2,000	.0079	.....	
.....	2,600	.0109	.....	
.....	2,000	.0080	.....	
.....	1,600	.0060	.....	
.....	1,000	.0031	.....	
.....	600	.0015	.0001	
76,224	3,200	.0139	.0001	
80,988	3,400	.0150	.0002	
85,752	3,600	.0159	.0001	
90,516	3,800	.0169	.0002	
95,280	4,000	.0189	.0003	
179,600	7,540	.....	.....	Fragment detached along edge. Ultimate strength.



No. 1477.

Marks, Pen. June 17.

Composition: Peninsular cement, neat.

Water used in gauging, 22.2 per cent of cement.

Age, set in air, 2 months 13 days.

Weight per cubic foot, 135.3 pounds.

Dimensions, 24".17 x 3".90 x 6".03.

Sectional area, 23.52 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Com- pression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
2,352	100	0.	0.	
7,056	300	.0011	0.	
11,760	500	.0022	0.	
14,112	600	.0029	0.	
18,816	800	.0043	.0001	
23,520	1,000	.0055	.0001	
28,224	1,200	.0069	.0002	
32,928	1,400	.0080	.0003	
37,632	1,600	.0091	.0004	
42,336	1,800	.0100	.0004	Rested 3½ hours under initial load.
47,040	2,000	.0111	.0006	
51,744	2,200	.0125	.....	
56,448	2,400	.0138	.....	
61,152	2,600	.0150	.....	
65,856	2,800	.0162	.....	
70,560	3,000	.0174	.0010	
75,264	3,200	.0186	.0011	
79,968	3,400	.0200	.0012	
84,672	3,600	.0213	.0014	
.....	600	.0035	.....	E (500-2,000) = 3,571,000 pounds per square inch.
.....	1,000	.0059	.....	
.....	1,600	.0093	.....	
.....	2,000	.0118	.....	
.....	2,600	.0155	.....	
.....	3,000	.0178	.....	
.....	2,600	.0158	.....	
.....	2,000	.0120	.....	
.....	1,600	.0099	.....	
.....	1,000	.0064	.....	
.....	600	.0040	.0015	E (2,000-3,000) = 3,448,000 pounds per square inch.
70,560	3,000	.0179	.....	
84,672	3,600	.0216	.....	
89,376	3,800	.0231	.....	
94,080	4,000	.0248	.0020	
98,784	4,200	.0261	.0022	
103,488	4,400	.0279	.0024	
108,192	4,600	.0290	.0025	
112,896	4,800	.0305	.0028	
117,600	5,000	.0324	.0030	
.....	600	.0050	.....	E (3,000-4,000) = 3,125,000 pounds per square inch.
.....	1,000	.0071	.....	
.....	1,600	.0107	.....	
.....	2,000	.0132	.....	
.....	2,600	.0169	.....	
.....	3,000	.0194	.....	
.....	2,600	.0174	.....	
.....	2,000	.0138	.....	
.....	1,600	.0113	.....	
.....	1,000	.0077	.....	
.....	600	.0051	.0030	
.....	1,000	.0071	.....	Crack near end.
.....	2,000	.0181	.....	
.....	3,000	.0198	.....	
.....	4,000	.0256	.....	
.....	3,000	.0198	.....	
.....	2,000	.0140	.....	
.....	1,000	.0078	.0081	
.....	600	.0051	.....	
.....	1,000	.0071	.....	
.....	2,000	.0181	.....	
122,304	5,200	.0345	.0035	Ultimate strength.
157,800	6,710	.....	.....	

No. 1478.

Marks, Pen. June 18.

Composition: Peninsular cement, neat.

Water used in gauging, 27.5 per cent of cement.

Age, set in water, 2 months 14 days.

Weight per cubic foot (as taken from water), 138.0 pounds.

Dimensions, 24" .17 × 3" .88 × 6" .04.

Sectional area, 23.43 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,348	100	0.	0.	Initial load.
7,029	300	.0013	.0002	
11,715	500	.0023	.0001	
14,068	600	.0028	.0001	
18,744	800	.0038	.0001	
23,430	1,000	.0048	.0001	
28,118	1,200	.0059	.0001	
32,802	1,400	.0070	.0001	
37,488	1,600	.0081	.0002	
42,174	1,800	.0093	.0004	
46,860	2,000	.0105	.0005	E (500-2,000)=3,846,000 pounds per square inch.
51,546	2,200	.0118	.0005	
56,232	2,400	.0127	.0005	
60,918	2,600	.0140	.0006	
65,604	2,800	.0153	.0007	
70,290	3,000	.0164	.0008	E (2,000-3,000)=3,571,000 pounds per square inch.
74,976	3,200	.0175	.0009	
79,662	3,400	.0189	.0010	
84,348	3,600	.0200	.0011	
-----	600	.0040	-----	
-----	1,000	.0082	-----	
-----	1,600	.0094	-----	
-----	2,000	.0115	-----	
-----	2,600	.0149	-----	
-----	3,000	.0171	-----	
-----	2,800	.0150	-----	
-----	2,000	.0120	-----	
-----	1,600	.0099	-----	
-----	1,000	.0068	-----	
-----	600	.0044	.0011	
70,290	3,000	.0169	-----	
84,348	3,600	.0201	-----	
89,084	3,800	.0216	.0013	
98,720	4,000	.0227	.0014	E (3,000-4,000)=3,509,000 pounds per square inch.
96,406	4,200	.0240	.0015	
103,092	4,400	.0256	.0016	Cracked along lower edge.
107,778	4,600	.0273	.0019	
112,464	4,800	.0289	.0021	Small fragment detached from lower edge.
117,150	5,000	.0306	.0025	
-----	600	.0054	-----	
-----	1,000	.0078	-----	
-----	1,600	.0112	-----	
-----	2,000	.0136	-----	
-----	2,600	.0168	-----	
-----	3,000	.0202	-----	
-----	2,600	.0173	-----	
-----	2,000	.0141	-----	
-----	1,600	.0119	-----	
-----	1,000	.0086	-----	
-----	600	.0060	.0022	
-----	1,000	.0081	-----	
-----	2,000	.0135	-----	
-----	3,000	.0191	-----	
-----	4,000	.0250	-----	
-----	3,000	.0199	-----	
-----	2,000	.0145	-----	
-----	1,000	.0089	.0026	
121,836	5,200	.0321	.0027	
157,500	6,720	-----	-----	Ultimate strength.

No. 1479.

Marks, Pen. June 19.

Composition: Peninsular cement, 1; sand, 1.

Water used in gauging, 32.5 per cent of cement.

Age, set in air, 2 months 13 days.

Weight per cubic foot, 133.4 pounds.

Dimensions, 24".02 x 3".89 x 6".02.

Sectional area, 23.42 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
2,342	100	0.	0.	Initial load.	
4,684	200	.0008	0.		
7,026	300	.0014	0.		
9,368	400	.0020	0.		
11,710	500	.0028	0.		
14,052	600	.0032	0.		
18,736	800	.0047	0.		
23,420	1,000	.0063	.0001		
28,104	1,200	.0076	.0002		
32,788	1,400	.0098	.0006		
37,472	1,600	.0108	.0007		
42,156	1,800	.0125	.0010		
46,840	2,000	.0141	.0013		E (500-2,000) = 2,941,000 pounds per square inch.
51,524	2,200	.0158	.0013		
56,208	2,400	.0177	.0019		
60,892	2,600	.0200	.0025	E (2,000-3,000) = 2,489,000 pounds per square inch.	
65,576	2,800	.0220	.0029		
70,260	3,000	.0244	.0034		
74,944	3,200	.0265	.0037		
79,628	3,400	.0290	.0044		
84,312	3,600	.0318	.0051		
.....	600	.0080	.....		
.....	1,000	.0124	.....		
.....	1,600	.0169	.....		
.....	2,000	.0215	.....		
.....	2,600	.0246	.....		
.....	3,000	.0277	.....		
.....	2,600	.0254	.....		
.....	2,000	.0229	.....		
.....	1,600	.0189	.....		
.....	1,000	.0144	.....		
.....	600	.0110	.0067	Micrometer disturbed in its position.	
88,996	3,800	.0327	.0044		
93,680	4,000	.0371	.0060		
96,364	4,200	.....	.....	Ultimate strength.	

No. 1480.

Marks, Pen. June 20.

Composition: Peninsular cement, 1; sand, 1.

Water used in gauging, 31.8 per cent of cement.

Age, set in water, 2 months 12 days.

Weight per cubic foot (as taken from water), 139.5 pounds.

Dimensions, 24".16 × 3".90 × 6".02.

Sectional area, 23.48 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,348	100	0.	0.	Initial load.
4,696	200	.0006	0.	
7,044	300	.0011	0.	
9,392	400	.0018	0.	
11,740	500	.0025	0.	
14,088	600	.0030	.0001	
18,784	800	.0040	.0002	
23,480	1,000	.0050	.0002	
28,176	1,200	.0061	.0004	
32,872	1,400	.0070	.0004	
37,568	1,600	.0081	.0005	
42,264	1,800	.0091	.0005	
46,960	2,000	.0102	.0006	E (500-2,000) = 4,225,000 pounds per square inch.
-----	600	.0082	-----	
-----	1,000	.0064	-----	
-----	1,600	.0084	-----	
-----	1,000	.0067	-----	
-----	600	.0085	.0005	
51,656	2,200	.0115	.0006	
56,352	2,400	.0126	.0008	
61,048	2,600	.0136	.0009	
65,744	2,800	.0149	.0010	
70,440	3,000	.0160	.0011	E (2,000-3,000) = 3,774,000 pounds per square inch.
75,136	3,200	.0173	.0013	
79,832	3,400	.0185	.0014	
84,528	3,600	.0199	.0016	
-----	600	.0043	-----	
-----	1,000	.0066	-----	
-----	1,600	.0096	-----	
-----	2,000	.0118	-----	
-----	2,600	.0148	-----	
-----	3,000	.0170	-----	
-----	2,600	.0151	-----	
-----	2,000	.0126	-----	
-----	1,600	.0106	-----	
-----	1,000	.0075	-----	
-----	600	.0049	.0018	
89,224	3,800	.0215	.0018	
93,920	4,000	.0230	.0021	E (3,000-4,000) = 3,333,000 pounds per square inch.
161,700	6,890	-----	-----	Ultimate strength.

No. 1481.

Marks, Pen. June 12.

Composition: Peninsular cement, 1; sand, 2.

Water used in gauging, 48.1 per cent of cement.

Age, set in air, 2 months 21 days.

Weight per cubic foot, 125.4 pounds.

Dimensions, 24".16 × 3".86 × 6".09.

Sectional area, 23.51 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,351	100	0.	0.	Initial load.
4,702	200	.0008	0.	
7,053	300	.0017	0.	
9,404	400	.0025	.0002	
11,755	500	.0035	.0004	
14,106	600	.0045	.0005	
18,808	800	.0065	.0007	
23,510	1,000	.0086	.0011	
28,212	1,200	.0110	.0015	
32,914	1,400	.0134	.0020	
37,616	1,600	.0160	.0025	
42,318	1,800	.0191	.0033	
47,020	2,000	.0224	.0041	E (500-2,000) = 1,974,000 pounds per square inch.
.....	600	.0068	.....	
.....	1,000	.0128	.....	
.....	1,600	.0185	.....	
.....	1,000	.0187	.....	
.....	600	.0099	.0043	
51,722	2,200	.0261	.0053	Corner cracked.
56,424	2,400	.0338	.0090	
57,000	2,420	.....	.....	Ultimate strength.

No. 1482.

Marks, Pen. June 21.

Composition: Peninsular cement, 1; sand, 2.

Water used in gauging, 46.4 per cent of cement.

Age, set in water, 2 months 13 days.

Weight per cubic foot, 136.1 pounds.

Dimensions, 24".17 × 3".87 × 6".05.

Sectional area, 23.41 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
2, 341	100	0.	0.	
4, 682	200	.0006	0.	
7, 023	300	.0012	0.	
9, 364	400	.0016	0.	
11, 705	500	.0022	0.	
14, 046	600	.0028	0.	
16, 387	700	.0034	.0001	
18, 728	800	.0041	.0001	
21, 069	1, 000	.0054	.0001	
23, 410	1, 200	.0068	.0002	
25, 751	1, 400	.0078	.0001	
28, 092	1, 600	.0093	.0003	
30, 433	1, 800	.0110	.0005	
32, 774	2, 000	.0128	.0008	
.....	600	.0040	.....	
.....	1, 000	.0066	.....	
.....	1, 600	.0103	.....	
.....	1, 000	.0070	.....	
.....	600	.0045	.0009	
51, 502	2, 200	.0147	.0011	E (500-2,000) = 3,093,000 pounds per square inch.
53, 843	2, 400	.0167	.0015	
56, 184	2, 600	.0189	.0019	
58, 525	2, 800	.0213	.0020	
60, 866	3, 000	.0239	.0028	
63, 207	3, 200	.0269	.0034	
65, 548	3, 400	.0295	.0040	
67, 889	3, 600	.0321	.0048	
70, 230	3, 800	.0349	.0056	
72, 571	4, 000	.0379	.0064	
.....	600	.0081	.....	
.....	1, 000	.0115	.....	
.....	1, 600	.0163	.....	
.....	2, 000	.0196	.....	
.....	1, 600	.0173	.....	
.....	1, 000	.0131	.....	
.....	600	.0096	.0043	
91, 800	3, 920	.....	.....	Ultimate strength.

No. 1483.

Marks, Pen. June 13.

Composition: Peninsular cement, 1; sand, 3.

Water used in gauging, 68 per cent of cement.

Age, set in air, 2 months 20 days.

Weight per cubic foot, 118.8 pounds.

Dimensions, 24.20 × 3".83 × 6".05.

Sectional area, 23.17 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
2,317	100	0.	0.	
4,634	200	.0014	0.	E(500-1,000) = 1,389,000 pounds per square inch.
6,951	300	.0026	.0001	
9,268	400	.0036	.0001	
11,585	500	.0049	.0002	
13,902	600	.0065	.0005	
16,219	700	.0080	.0007	
18,536	800	.0098	.0011	
20,853	900	.0117	.0015	
23,170	1,000	.0139	.0020	
25,487	1,100	.0158	.0024	
27,804	1,200	.0188	.0034	
.....	200	.0045	.....	
.....	400	.0071	.....	
.....	600	.0102	.....	
.....	800	.0131	.....	
.....	1,000	.0160	.....	
.....	800	.0138	.....	
.....	600	.0112	.....	
.....	400	.0082	.....	
.....	200	.0050	.0036	
30,121	1,300	.0217	.0045	Ultimate strength.
32,438	1,400	.0249	.0056	
34,755	1,500	.0300	.0080	
34,900	1,510	.....	.....	

No. 1484.

Marks, Pen. June 23.

Composition: Peninsular cement, 1; sand, 3.

Water used in gauging, 58.3 per cent of cement.

Age, set in water, 2 months 11 days.

Weight, per cubic foot, 130.7 pounds.

Dimensions, 24".15 × 3".89 × 6".05.

Sectional area, 23.53 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,353	100	0.	0.	Initial load.
4,706	200	.0009	.0001	
7,059	300	.0015	.0003	
9,412	400	.0021	.0004	
11,765	500	.0030	.0004	
14,118	600	.0035	.0004	
16,471	700	.0043	.0005	
18,824	800	.0051	.0006	
21,177	900	.0060	.0007	
23,530	1,000	.0070	.0009	E (500-1,000) = 2,857,000 pounds per square inch.
25,883	1,100	.0080	.0009	
28,236	1,200	.0090	.0010	
.....	200	.0017	.....	
.....	400	.0030	.....	
.....	600	.0045	.....	
.....	800	.0062	.....	
.....	1,000	.0075	.....	
.....	800	.0068	.....	
.....	600	.0049	.....	
.....	400	.0035	.....	
.....	200	.0020	.0010	
80,589	1,300	.0101	.0012	
82,942	1,400	.0113	.0014	
85,295	1,500	.0126	.0015	
87,648	1,600	.0140	.0017	
40,001	1,700	.0153	.0020	
42,354	1,800	.0170	.0022	
44,707	1,900	.0189	.0025	
47,060	2,000	.0208	.0029	E (1,000-2,000) = 1,695,000 pounds per square inch.
.....	200	.0036	.....	
.....	400	.0055	.....	
.....	600	.0077	.....	
.....	800	.0095	.....	
.....	1,000	.0118	.....	
.....	1,200	.0137	.....	
.....	1,400	.0157	.....	
.....	1,600	.0176	.....	
.....	1,400	.0168	.....	
.....	1,200	.0149	.....	
.....	1,000	.0133	.....	
.....	800	.0115	.....	
.....	600	.0096	.....	
.....	400	.0073	.....	
.....	200	.0048	.0035	
51,766	2,200	.0260	.0047	
56,472	2,400	.0321	.0068	
60,500	2,570	.....	.....	Ultimate strength.



No. 1485.

Marks: Pen. June 14.  
 Composition: Peninsular cement, 1; sand, 4.  
 Water used in gauging, 87 per cent of cement.  
 Age, set in air, 2 months 21 days.  
 Weight per cubic foot, 113.4 pounds.  
 Dimensions, 24".14 × 3".85 × 6".03.  
 Sectional area, 23.22 square inches.  
 Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set,	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
2,322	100	0.	0.	
4,644	200	.0014	0.	
6,966	300	.0032	.0002	
9,288	400	.0052	.0005	
11,610	500	.0074	.0008	E (100-500) = 1,212,000 pounds per square inch.
13,932	600	.0101	.0015	
16,254	700	.0136	.0025	
18,576	800	.0174	.0036	
20,898	900	.....	.....	Ultimate strength.

No. 1486.

Marks, Pen. June 24.  
 Composition: Peninsular cement, 1; sand, 4.  
 Water used in gauging, 80 per cent of cement.  
 Age, set in water, 2 months 11 days.  
 Weight per cubic foot, 128.4 pounds.  
 Dimensions, 24".15 × 3".90 × 6".04.  
 Sectional area, 23.56 square inches.  
 Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.
2,356	100	0.	0.	
4,712	200	.0011	0.	
7,068	300	.0025	.0003	
9,424	400	.0039	.0005	
11,780	500	.0054	.0006	E (100-500) = 1,667,000 pounds per square inch.
14,136	600	.0072	.0009	
16,492	700	.0097	.0016	
18,848	800	.0125	.0023	
21,204	900	.0163	.0040	
23,560	1,000	.0225	.0065	E (500-1,000) = 893,000 pounds per square inch.
.....	200	.0080	.....	
.....	400	.0119	.....	
.....	600	.0157	.....	
.....	800	.0195	.....	
.....	600	.0170	.....	
.....	400	.0139	.....	
.....	200	.0095	.0067	
24,900	1,080	.....	.....	Ultimate strength.

No. 1466.

Marks, ☆ March 6.

Composition: Star Portland cement, with plaster, neat.

Water used in gauging, 25 per cent of cement.

Age, set in air, 1 month.

Dimensions, 23'' .95 × 3'' .89 × 6'' .08.

Sectional area, 23.65 square inches.

Gauged length, 20''.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,365	100	0.	0.	Initial load.
4,730	200	.0007	0.	
7,096	300	.0014	-.0001	
9,460	400	.0021	-.0002	
11,825	500	.0030	-.0002	
14,190	600	.0038	-.0002	
16,555	700	.0046	-.0002	
18,920	800	.0054	-.0002	
21,285	900	.0061	-.0002	
23,650	1,000	.0068	-.0002	
26,015	1,200	.0084	-.0002	
28,380	1,400	.0098	-.0002	
30,745	1,600	.0115	0.	
33,110	1,800	.0130	+.0001	Fine transverse cracks across one 4" side in three places. Two of these were not visible while the prism was loaded.
35,475	2,000	.0142	.0002	E (500-2,000) = 2,778,000 pounds per square inch.
37,840	2,200	.0159	.0003	
40,205	2,400	.0174	.0005	Longitudinal crack at one end of prism.
42,570	2,600	.0188	.0006	
44,935	2,800	.0205	.0008	
47,300	3,000	.0220	.0010	E (500-3,000) = 2,809,000 pounds per square inch.
49,665	3,200	.0238	.0011	
52,030	3,400	.0255	.0016	
54,395	3,600			Ultimate strength.
56,760	3,800			
59,125	4,000			
61,490	4,200			
63,855	4,400			
66,220	4,600			
68,585	4,800			
70,950	5,000			
73,315	5,200			
75,680	5,400			
78,045	5,600			
80,410	5,800			
82,775	6,000			
85,140	6,200			
87,505	6,400			
89,870	6,600			
92,235	6,800			
94,600	7,000			
96,965	7,200			
99,330	7,400			
101,695	7,600			
104,060	7,800			
106,425	8,000			
108,790	8,200			
111,155	8,400			
113,520	8,600			
115,885	8,800			
118,250	9,000			
120,615	9,200			
122,980	9,400			
125,345	9,600			
127,710	9,800			
130,075	10,000			
132,440	10,200			
134,805	10,400			
137,170	10,600			
139,535	10,800			
141,900	11,000			
144,265	11,200			
146,630	11,400			
148,995	11,600			
151,360	11,800			
153,725	12,000			
156,090	12,200			
158,455	12,400			
160,820	12,600			
163,185	12,800			
165,550	13,000			
167,915	13,200			
170,280	13,400			
172,645	13,600			
175,010	13,800			
177,375	14,000			
179,740	14,200			
182,105	14,400			
184,470	14,600			
186,835	14,800			
189,200	15,000			
191,565	15,200			
193,930	15,400			
196,295	15,600			
198,660	15,800			
201,025	16,000			
203,390	16,200			
205,755	16,400			
208,120	16,600			
210,485	16,800			
212,850	17,000			
215,215	17,200			
217,580	17,400			
219,945	17,600			
222,310	17,800			
224,675	18,000			
227,040	18,200			
229,405	18,400			
231,770	18,600			
234,135	18,800			
236,500	19,000			
238,865	19,200			
241,230	19,400			
243,595	19,600			
245,960	19,800			
248,325	20,000			
250,690	20,200			
253,055	20,400			
255,420	20,600			
257,785	20,800			
260,150	21,000			
262,515	21,200			
264,880	21,400			
267,245	21,600			
269,610	21,800			
271,975	22,000			
274,340	22,200			
276,705	22,400			
279,070	22,600			
281,435	22,800			
283,800	23,000			
286,165	23,200			
288,530	23,400			
290,895	23,600			
293,260	23,800			
295,625	24,000			
297,990	24,200			
300,355	24,400			
302,720	24,600			
305,085	24,800			
307,450	25,000			
309,815	25,200			
312,180	25,400			
314,545	25,600			
316,910	25,800			
319,275	26,000			
321,640	26,200			
324,005	26,400			
326,370	26,600			
328,735	26,800			
331,100	27,000			
333,465	27,200			
335,830	27,400			
338,195	27,600			
340,560	27,800			
342,925	28,000			
345,290	28,200			
347,655	28,400			
350,020	28,600			
352,385	28,800			
354,750	29,000			
357,115	29,200			
359,480	29,400			
361,845	29,600			
364,210	29,800			
366,575	30,000			
368,940	30,200			
371,305	30,400			
373,670	30,600			
376,035	30,800			
378,400	31,000			
380,765	31,200			
383,130	31,400			
385,495	31,600			
387,860	31,800			
390,225	32,000			
392,590	32,200			
394,955	32,400			
397,320	32,600			
399,685	32,800			
402,050	33,000			
404,415	33,200			
406,780	33,400			
409,145	33,600			
411,510	33,800			
413,875	34,000			
416,240	34,200			
418,605	34,400			
420,970	34,600			
423,335	34,800			
425,700	35,000			
428,065	35,200			
430,430	35,400			
432,795	35,600			
435,160	35,800			
437,525	36,000			
439,890	36,200			
442,255	36,400			
444,620	36,600			
446,985	36,800			
449,350	37,000			
451,715	37,200			
454,080	37,400			
456,445	37,600			
458,810	37,800			
461,175	38,000			
463,540	38,200			
465,905	38,400			
468,270	38,600			
470,635	38,800			
473,000	39,000			
475,365	39,200			
477,730	39,400			
480,095	39,600			
482,460	39,800			
484,825	40,000			
487,190	40,200			
489,555	40,400			
491,920	40,600			
494,285	40,800			
496,650	41,000			
499,015	41,200			
501,380	41,400			
503,745	41,600			
506,110	41,800			
508,475	42,000			
510,840	42,200			
513,205	42,400			
515,570	42,600			
517,935	42,800			
520,300	43,000			
522,665	43,200			
525,030	43,400			
527,395	43,600			
529,760	43,800			
532,125	44,000			
534,490	44,200			
536,855	44,400			
539,220	44,600			
541,585	44,800			
543,950	45,000			
546,315	45,200			
548,680	45,400			
551,045	45,600			
553,410	45,800			
555,775	46,000			
558,140	46,200			
560,505	46,400			
562,870	46,600			
565,235	46,800			
567,600	47,000			
570,000	47,200			
572,400	47,400			
574,800	47,600			
577,200	47,800			
579,600	48,000			
582,000	48,200			
584,400	48,400			</



No. 1470. .

Marks, ☆ March 12.

Composition: Star Portland cement, without plaster, neat.

Water used in gauging, 28.1 per cent of cement.

Age, set in air, 1 month.

Weight per cubic foot, 126.5 pounds.

Dimensions, 23".98 × 3".87 × 6".

Sectional area, 23.22 square inches.

Gauged length, 20".

A number of oblique cracks were found at corners of prism when mold was stripped.

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
2,322	100	0.	0.		
4,644	200	.0013	0.	9 fine transverse cracks visible.	
6,966	300	.0026	.0001		
9,288	400	.0042	.0001		
11,610	500	.0060	.0004		
13,932	600	.0077	.0006		
16,254	700	.0095	.0009		
18,576	800	.0115	.0013		
20,898	900	.0135	.0017		
23,220	1,000	.0162	.0021		
27,864	1,200	.0191	.0030		
32,508	1,400	.0230	.0040		
37,152	1,600	.0279	.0056		
41,796	1,800	.0321	.0071		
46,440	2,000	.0370	.0091		
51,084	2,200	.0418	.0111		
55,728	2,400	.0470	.0132		
60,372	2,600	.0530	.0168		
.....	400	.0212	.....	E (500-2,000) 1,345,000 pounds per square inch.	
.....	800	.0279	.....		
.....	1,200	.0342	.....		
.....	1,600	.0400	.....		
.....	2,000	.0456	.....		
.....	1,600	.0419	.....		
.....	1,200	.0370	.....		
.....	800	.0314	.....		
.....	400	.0245	.0176		
65,016	3,800	.0596	.0208		
69,660	3,000	.0670	.0246		
.....	.....	.....	.0220		
.....	400	.0271	.....		After resting under initial load 1 hour.
.....	800	.0338	.....		
.....	1,200	.0400	.....		
.....	1,600	.0459	.....		
.....	2,000	.0520	.....		
.....	1,600	.0482	.....		
.....	1,200	.0434	.....		
.....	800	.0379	.....		
.....	400	.0309	.....		
.....	.....	.....	.0238		
.....	.....	.....	.0233		
.....	.....	.....	.....	After resting 5 minutes.	
74,304	3,200	.0738	.0288		
78,948	3,400	.0854	.0367		
.....	.....	.....	.0348	After resting 5 minutes. After resting 10 minutes.	
.....	.....	.....	.0345		

No. 1470—Continued.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
Pounds.	Pounds.	Inch.	Inch.	
	400	.0397		
	800	.0465		
	1,200	.0530		
	1,600	.0591		
	2,000	.0650		
	2,400	.0715		
	2,800	.0775		
	2,400	.0744		
	2,000	.0714		
	1,600	.0670		
	1,200	.0620		
	800	.0560		
	400	.0481		
			.0408	
			.0891	After resting 5 minutes.
			.0387	After resting 10 minutes.
	2,800	.0786		
	2,800	.0820		After sustaining load 5 minutes.
	2,800	.0830		After sustaining load 10 minutes.
	2,800	.0841		After sustaining load 15 minutes.
	2,800	.0848		After sustaining load 20 minutes.
	2,800	.0854		After sustaining load 25 minutes.
	100		.0461	
	100		.0439	After resting 5 minutes.
	100		.0432	After resting 10 minutes.
	2,800	.0837		
	2,800	.0859		After sustaining load 5 minutes.
	2,800	.0868		After sustaining load 10 minutes.
	2,800	.0878		After sustaining load 15 minutes.
	2,800	.0882		After sustaining load 20 minutes.
	2,800	.0887		After sustaining load 25 minutes.
	2,800	.0891		After sustaining load 30 minutes.
	2,800	.0896		After sustaining load 35 minutes.
	2,800	.0900		After sustaining load 40 minutes.
	2,800	.0904		After sustaining load 45 minutes.
	2,800	.0909		After sustaining load 50 minutes.
	2,800	.0916		After sustaining load 1 hour.
	2,800	.0921		After sustaining load 1 hour 10 minutes.
	2,800	.0925		After sustaining load 1 hour 20 minutes.
46,440	2,000	.0846		Load left on prism at night.
34,400	1,480			Load found on prism in the morning, 15 hours later.
46,440	2,000	.0893		
65,016	2,800	.0976		
	2,800	.0984		After sustaining load 5 minutes.
	2,800	.0989		After sustaining load 10 minutes.
	2,800	.0994		After sustaining load 20 minutes.
	2,800	.0998		After sustaining load 30 minutes.
	2,800	.1001		After sustaining load 40 minutes.
	2,800	.1006		After sustaining load 50 minutes.
	2,800	.1009		After sustaining load 1 hour.
	2,800	.1017		After sustaining load 1 hour 30 minutes.
	2,800	.1025		After sustaining load 2 hours.
	2,800	.1032		After sustaining load 2 hours 30 minutes.
	2,800	.1039		After sustaining load 3 hours.
	2,800	.1046		After sustaining load 3 hours 30 minutes.
	2,800	.1062		After sustaining load 4 hours 50 minutes.

Specimen removed from the machine.  
 Test resumed after resting without load 21 hours.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i> 2, 322	<i>Pounds.</i> 1, 000	<i>Inch.</i> 0.	<i>Inch.</i> 0.	
.....	2, 000	.0243	.....	Initial load. Micrometer reset at zero. There are numerous oblique cracks and one longitudinal crack in prism.
.....	2, 800	.0337	.....	
.....	2, 800	.0359	.....	After sustaining load 5 minutes.
.....	2, 800	.0366	.....	After sustaining load 10 minutes.
.....	2, 800	.0375	.....	After sustaining load 20 minutes.
.....	2, 800	.0381	.....	After sustaining load 30 minutes.
.....	2, 800	.0396	.....	After sustaining load 1 hour.
.....	2, 800	.0415	.....	After sustaining load 2 hours.
.....	2, 800	.0430	.....	After sustaining load 3 hours.
.....	2, 800	.0444	.....	After sustaining load 4 hours.
.....	2, 800	.0457	.....	After sustaining load 5 hours.
.....	2, 800	.0470	.....	After sustaining load 6 hours.
65, 016	2, 800	.0472	.....	Load left on prism at night.
63, 600	2, 740	.0576	.....	Load found on prism in the morning, 15 hours 25 minutes later.
65, 016	2, 800	.0582	.....	After sustaining load 30 minutes.
.....	2, 800	.0585	.....	
.....	2, 800	.0589	.....	After sustaining load 1 hour.
.....	2, 800	.0594	.....	After sustaining load 2 hours.
.....	2, 800	.0600	.....	After sustaining load 3 hours.
.....	2, 800	.0604	.....	After sustaining load 4 hours.
.....	2, 800	.0605	.....	After sustaining load 4½ hours.
69, 660	3, 000	.0623	.....	After 2 minutes.
74, 304	3, 200	.0644	.....	
78, 948	3, 400	.0668	.....	Do.
.....	100	.0671	.0285	
.....	3, 400	.0671	.0273	Do.
.....	100	.0681	.0280	
.....	.....	.....	.0271	Do.
.....	.....	.....	.0266	
94, 800	4, 060	.....	.....	After 4 minutes. Ultimate strength.







No. 14756.

Test resumed after an interval of 4 months.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,357	100	0.	0.	Micrometer reset at zero.
11,785	500	.0020	0.	
23,570	1,000	.0044	0.	
37,712	1,600	.0073	0.	
47,140	2,000	.0098	0.	E (500-2,000)=4,110,000 pounds per square inch.
61,282	2,600	.0122	.0001	
70,710	3,000	.0143	.0002	
84,852	3,600	.0172	.0002	E (2,000-4,000)=4,124,000 pounds per square inch.
94,280	4,000	.0194	.0004	
108,422	4,600	.0226	.0006	
117,850	5,000	.0250	.0007	
131,992	5,600	.0283	.0010	
141,420	6,000	.0310	.0012	E (4,000-6,000)=3,704,000 pounds per square inch.
155,562	6,600	.0348	.0014	
164,990	7,000	.0377	.0018	
.....	1,000	.0060	.....	
.....	2,000	.0110	.....	
.....	3,000	.0161	.....	
.....	4,000	.0213	.....	
.....	5,000	.0274	.....	
.....	6,000	.0330	.....	
.....	5,000	.0282	.....	
.....	4,000	.0231	.....	
.....	3,000	.0180	.....	
.....	2,000	.0128	.....	
.....	1,000	.0074	.0026	
216,400	9,180	.....	.....	Ultimate strength.

No. 1454.

Marks, W'H. Sept. 18.

Composition: Whitehall cement, neat.

Water used in gauging, 21.3 per cent of cement.

Age, set in air, 21 days.

Weight per cubic foot, 136.1 pounds.

Dimensions, 23".98 × 3".87 × 6".02.

Sectional area, 23.39 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
2,339	100	0.	0.	Initial load.	
4,678	200	.0006	0.		
7,017	300	.0012	0.		
9,356	400	.0018	0.		
11,695	500	.0024	.0001		
14,034	600	.0030	.0002		
16,373	700	.0036	.0002		
18,712	800	.0042	.0002		
21,051	900	.0048	.0002		
23,390	1,000	.0054	.0003		
25,729	1,200	.0068	.0003		
28,068	1,400	.0080	.0004		
30,407	1,600	.0092	.0004		
32,746	1,800	.0106	.0005		
35,085	2,000	.0117	.0006		E (500-2,000)=3,409,000 pounds per square inch.
37,424	2,200	.0131	.0006		
39,763	2,400	.0142	.0007		
42,102	2,600	.0157	.0008		
44,441	2,800	.0172	.0009		
46,780	3,000	.0184	.0011		
49,119	3,200	.0200	.0012		
51,458	3,400	.0214	.0013		
53,797	3,600	.0230	.0016		
56,136	3,800	.0246	.0017		
58,475	4,000	.0262	.0022	E (2,000-4,000)=3,101,000 pounds per square inch.	
60,814	4,200	.0279	.0024		
63,153	4,400	.0298	.0027		
65,492	4,600	.0317	.0032		
67,831	4,800	.0333	.0035		
70,170	5,000	.0353	.0039		
72,509	5,000	.....	.....		Load left on prism at evening.
74,848	5,000	.....	.....		
77,187	3,650	.....	.....		Ultimate strength.
79,526	7,990	.....	.....		

No. 1455.

Marks, W<sup>3</sup>H. Oct. 6.

Composition: Whitehall cement, neat.

Water used in gauging, 21.3 per cent of cement.

Age, set in air, 7 days.

Weight per cubic foot, 135.3 pounds.

Dimensions, 2<sup>1</sup>/<sub>2</sub>" .20 × 3<sup>1</sup>/<sub>2</sub>" .86 × 6<sup>1</sup>/<sub>2</sub>" .05.

Sectional area, 23.35 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,335	100	0.	0.	Initial load.
4,670	200	.0006	0.	
7,005	300	.0014	0.	
9,340	400	.0021	0.	
11,675	500	.0027	0.	
14,010	600	.0035	0.	
16,345	700	.0040	0.	
18,680	800	.0046	0.	
21,015	900	.0052	.0001	
23,350	1,000	.0059	.0001	
25,685	1,100	.0072	.0001	
28,020	1,200	.0085	.0001	
30,355	1,300	.0099	.0001	
32,690	1,400	.0112	.0002	
35,025	1,500	.0126	.0003	
37,360	1,600	.0143	.0005	E (500-2,000) - 3,125,000 pounds per square inch.
39,695	1,700	.0157	.0005	
42,030	1,800	.0172	.0008	
44,365	1,900	.0186	.0009	
46,700	2,000	.0205	.0013	
49,035	2,100	.0220	.0015	
51,370	2,200	.0239	.0017	
53,705	2,300	.0256	.0020	
56,040	2,400	.0276	.0024	
58,375	2,500	.0300	.0027	
60,710	2,600	.0326	.0035	E (2,000-4,000) - 2,667,000 pounds per square inch.
63,045	2,700	.0353	.0040	Cracks along edge.
65,380	2,800	.0382	.0049	
67,715	2,900	.0405	.0058	
70,050	3,000	.0435	.0068	
72,385	3,100			Load left on prism at evening.
74,720	3,200			Load found on prism in the morning, 16 hours later.
77,055	3,300			Ultimate strength. Age when fractured, 8 days.
79,390	3,400			
81,725	3,500			
84,060	3,600			
86,395	3,700			
88,730	3,800			
91,065	3,900			
93,400	4,000			
95,735	4,100			
98,070	4,200			
100,405	4,300			
102,740	4,400			
105,075	4,500			
107,410	4,600			
109,745	4,700			
112,080	4,800			
114,415	4,900			
116,750	5,000			
119,085	5,100			
121,420	5,200			
123,755	5,300			
126,090	5,400			
128,425	5,500			
130,760	5,600			
133,095	5,700			
135,430	5,800			
137,765	5,900			
140,100	6,000			
142,435	6,100			
144,770	6,200			
147,105	6,300			
149,440	6,400			
151,775	6,500			
154,110	6,600			
156,445	6,700			
158,780	6,800			
161,115	6,900			
163,450	7,000			
165,785	7,100			
168,120	7,200			
170,455	7,300			
172,790	7,400			
175,125	7,500			
177,460	7,600			
179,795	7,700			
182,130	7,800			
184,465	7,900			
186,800	8,000			
189,135	8,100			
191,470	8,200			
193,805	8,300			
196,140	8,400			
198,475	8,500			
200,810	8,600			
203,145	8,700			
205,480	8,800			
207,815	8,900			
210,150	9,000			
212,485	9,100			
214,820	9,200			
217,155	9,300			
219,490	9,400			
221,825	9,500			
224,160	9,600			
226,495	9,700			
228,830	9,800			
231,165	9,900			
233,500	10,000			
235,835	10,100			
238,170	10,200			
240,505	10,300			
242,840	10,400			
245,175	10,500			
247,510	10,600			
249,845	10,700			
252,180	10,800			
254,515	10,900			
256,850	11,000			
259,185	11,100			
261,520	11,200			
263,855	11,300			
266,190	11,400			
268,525	11,500			
270,860	11,600			
273,195	11,700			
275,530	11,800			
277,865	11,900			
280,200	12,000			
282,535	12,100			
284,870	12,200			
287,205	12,300			
289,540	12,400			
291,875	12,500			
294,210	12,600			
296,545	12,700			
298,880	12,800			
301,215	12,900			
303,550	13,000			
305,885	13,100			
308,220	13,200			
310,555	13,300			
312,890	13,400			
315,225	13,500			
317,560	13,600			
319,895	13,700			
322,230	13,800			
324,565	13,900			
326,900	14,000			
329,235	14,100			
331,570	14,200			
333,905	14,300			
336,240	14,400			
338,575	14,500			
340,910	14,600			
343,245	14,700			
345,580	14,800			
347,915	14,900			
350,250	15,000			
352,585	15,100			
354,920	15,200			
357,255	15,300			
359,590	15,400			
361,925	15,500			
364,260	15,600			
366,595	15,700			
368,930	15,800			
371,265	15,900			
373,600	16,000			
375,935	16,100			
378,270	16,200			
380,605	16,300			
382,940	16,400			
385,275	16,500			
387,610	16,600			
389,945	16,700			
392,280	16,800			
394,615	16,900			
396,950	17,000			
399,285	17,100			
401,620	17,200			
403,955	17,300			
406,290	17,400			
408,625	17,500			
410,960	17,600			
413,295	17,700			
415,630	17,800			
417,965	17,900			
420,300	18,000			
422,635	18,100			
424,970	18,200			
427,305	18,300			
429,640	18,400			
431,975	18,500			
434,310	18,600			
436,645	18,700			
438,980	18,800			
441,315	18,900			
443,650	19,000			
445,985	19,100			
448,320	19,200			
450,655	19,300			
452,990	19,400			
455,325	19,500			
457,660	19,600			
459,995	19,700			
462,330	19,800			
464,665	19,900			
467,000	20,000			

No. 1456.

Marks, W.H. Oct. 18.

Composition: Whitehall cement, neat.

Water used in gauging, 21.3 per cent of cement.

Age, set in air, 2 days.

Weight per cubic foot, 137 pounds.

Dimensions,  $2\frac{1}{2} \times 3 \times 6 \frac{1}{4}$ .

Sectional area, 23.19 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
2,319	100	0.	0.	Initial load.	
4,638	200	.0005	0.		
6,957	300	.0009	0.		
9,276	400	.0014	0.		
11,595	500	.0020	0.		
13,914	600	.0026	0.		
16,233	700	.0032	0.		
18,552	800	.0039	0.		
20,871	900	.0045	0.		
23,190	1,000	.0051	0.		
27,828	1,200	.0063	.0001		
32,466	1,400	.0076			
51,018	2,200	.0116	— .0005		Micrometer disturbed. E (500-2,200) = 3,366,000 pounds per square inch.
55,656	2,400	.0128	— .0004		
60,294	2,600	.0144	— .0001		
64,932	2,800	.0156	0.		
69,570	3,000	.0170	+ .0001		
74,208	3,200	.0184	.0003		
78,846	3,400	.0202	.0006		
83,484	3,600	.0220	.0010		
88,122	3,800	.0238	.0013		
92,760	4,000	.0254	.0015		
97,398	4,200	.0273	.0019	E (500-4,000) = 3,196,000 pounds per square inch.	
102,036	4,400	.0296	.0024		
106,674	4,600	.0325	.0035		
111,312	4,800	.0345	.0038		
116,950	5,000				Ultimate strength.

No. 1457.

Marks, W'H. Oct. 21.

Composition: Whitehall cement, neat.

Water used in gauging, 21.3 per cent of cement.

Age, set in air, 25 hours.

Weight per cubic foot, 136.7 pounds.

Dimensions, 24".10 × 3".80 × 6".05.

Sectional area, 22.99 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.	
Total.	Persquare inch.	Com- pression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.	
2,299	100	0.	0.		
4,598	200	.0006	0.		
6,897	300	.0013	.0002		
9,196	400	.0019	.0002		
11,495	500	.0025	.0002		
13,794	600	.0033	.0004		
16,093	700	.0039	.0005		
18,392	800	.0046	.0005		
20,691	900	.0053	.0005		
22,990	1,000	.0059	.0006		
25,289	1,100	.0066	.0006		
27,588	1,200	.0074	.0007		
29,887	1,300	.0080	.0007		
32,186	1,400	.0087	.0008		
34,485	1,500	.0095	.0009		
36,784	1,600	.0102	.0010		
41,382	1,800	.0117	.0011		
45,980	2,000	.0131	.0013		E (500-2,000) = 3,158,000 pounds persquare inch.
50,578	2,200	.0147	.0015		
55,176	2,400	.0165	.0018		
59,774	2,600	.0181	.0020		
64,372	2,800	.0197	.0023		
68,970	3,000	.0216	.0025		
73,568	3,200	.0236	.0029		
78,166	3,400	.0260	.0034		
82,764	3,600	.0283	.0040	E (500-3,600) = 2,818,000 pounds per square inch.	
106,400	4,680	.....	.....	Ultimate strength.	

No. 1490.

Marks, C. July 2.

Composition: Cathedral cement, neat.

Water used in gauging, 28.8 per cent of cement.

Age, set in air, 2 months 3 days.

Weight per cubic foot, 112.5 pounds.

Dimensions, 24".05 × 3".90 × 6".06.

Sectional area, 23.63 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (100-1,000) = 1,429,000 pounds per square inch. Crack.
2, 983	100	0.	0.	
4, 726	200	.0015	.0001	
7, 089	300	.0030	.0003	
9, 452	400	.0045	.0005	
11, 815	500	.0061	.0007	
14, 178	600	.0078	.0009	
16, 541	700	.0096	.0011	
18, 904	800	.0115	.0017	
21, 267	900	.0132	.0020	
23, 630	1, 000	.0156	.0029	
25, 993	1, 100	.0177	.0038	
28, 356	1, 200	.0195	.0043	
30, 719	1, 300	.0220	.0051	
33, 082	1, 400	.0248	.0062	
35, 445	1, 500	.0274	.0075	
37, 808	1, 600	.0306	.0094	
40, 171	1, 700	.0347	.0111	
42, 534	1, 800	.0389	.0140	
44, 897	1, 900	.0435	.0165	
59, 600	2, 520	.....	.....	Ultimate strength.

No. 1491.

Marks, C. July 3.

Composition: Cathedral cement, 1; sand, 1.

Water used in gauging, 36.6 per cent of cement.

Age, set in air, 2 months 3 days.

Weight per cubic foot, 123.9 pounds.

Dimensions, 23".90 × 3".92 × 6".03.

Sectional area, 23.64 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (100-1,000) = 1,978,000 pounds per square inch.  E (1,000-2,000) = 1,389,000 pounds per square inch. Crack. Ultimate strength.
2, 364	100	0.	0.	
4, 728	200	.0009	0.	
7, 092	300	.0018	0.	
9, 456	400	.0028	.0001	
11, 820	500	.0040	.0003	
14, 184	600	.0053	.0006	
16, 548	700	.0066	.0009	
18, 912	800	.0081	.0013	
21, 276	900	.0097	.0017	
23, 640	1, 000	.0114	.0023	
25, 996	1, 200	.0149	.0034	
33, 096	1, 400	.0190	.0050	
37, 824	1, 600	.0244	.0084	
42, 552	1, 800	.0314	.0110	
47, 280	2, 000	.0386	.0151	
52, 008	2, 200	.0495	.0218	
54, 200	2, 290	.....	.....	

No. 1492.

Marks, C. July 5.

Composition: Cathedral cement, 1; sand, 2.

Age, set in air, 2 months.

Weight per cubic foot, 123.5 pounds.

Dimensions, 24".18 × 3".90 × 6".05.

Sectional area, 23.60 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.          E (100-1,000) = 1,333,000 pounds per square inch.  Ultimate strength.
2,380	100	0.	0.	
4,720	200	.0016	.0001	
7,080	300	.0030	.0005	
9,440	400	.0044	.0008	
11,800	500	.0063	.0015	
14,160	600	.0083	.0020	
16,520	700	.0113	.0033	
18,880	800	.0143	.0047	
21,240	900	.0178	.0065	
23,600	1,000	.0219	.0084	
25,960	1,100	.0260	.0140	
28,320	1,200	.0365	.0184	
29,400	1,250	.....		

No. 1493.

Marks, C. July 7.

Composition: Cathedral cement, 1; sand, 3.

Water used in gauging, 63.3 per cent of cement.

Age, set in air, 2 months.

Weight per cubic foot, 120.1 pounds.

Dimensions, 24".12 × 3".91 × 6".07.

Sectional area, 23.73 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.     E (100-500) = 889,000 pounds per square inch. Ultimate strength.
2,373	100	0.	0.	
4,746	200	.0028	.0008	
7,119	300	.0060	.0021	
9,492	400	.0106	.0044	
11,865	500	.0181	.0071	
14,238	600	.....		

No. 1494.

Marks, S. July 9.

Composition: Silica cement, neat.

Water used in gauging, 25.8 per cent of cement.

Age, set in air, 1 month 28 days.

Weight per cubic foot, 117.8 pounds.

Dimensions, 24".22 x 3".90 x 6".02.

Sectional area, 23.48 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,348	100	0.	0.	Initial load.
4,696	200	.0010	0.	
7,044	300	.0020	0.	
9,392	400	.0031	0.	
11,740	500	.0045	0.	
14,088	600	.0058	0.	
16,436	700	.0072	.0001	
18,784	800	.0090	.0004	
21,132	900	.0105	.0008	
23,480	1,000	.0123	.0011	E (100-1,000) = 1,607,000 pounds per square inch.
25,828	1,200	.0154	.0024	
28,176	1,400	.0200	.0032	
32,872	1,600	.0258	.0052	
37,568	1,800	.0323	.0082	
42,264	2,000	.0402	.0124	Cracks. E (1,000-2,000) = 1,205,000 pounds per square inch.
51,656	2,200	.0506	.0175	
56,352	2,400	.0640	.0244	After 5 minutes.
.....	200	.0246	.....	
.....	400	.0275	.....	
.....	600	.0310	.....	
.....	800	.0342	.....	
.....	1,000	.0378	.....	
.....	1,200	.0415	.....	
.....	1,400	.0454	.....	
.....	1,600	.0500	.....	
.....	1,800	.0479	.....	
.....	1,200	.0457	.....	
.....	1,000	.0430	.....	
.....	800	.0401	.....	
.....	600	.0368	.....	
.....	400	.0330	.....	
.....	200	.0281	.0260	After 5 minutes.
.....	.....	.....	.0255	After 10 minutes.
.....	.....	.....	.0242	After 15 minutes.
.....	.....	.....	.0240	After 20 minutes.
.....	.....	.....	.0240	
.....	200	.0253	.....	
.....	400	.0282	.....	
.....	600	.0317	.....	
.....	800	.0352	.....	
.....	1,000	.0388	.....	After 5 minutes.
.....	.....	.0396	.....	After 10 minutes.
.....	800	.0400	.....	
.....	600	.0377	.....	
.....	400	.0349	.....	
.....	200	.0315	.....	
.....	.....	.0278	.0258	
59,100	2,520	.....	.....	Ultimate strength.



No. 1495.

Marks, S. July 10.

Composition: Silica cement, 1; sand, 1.

Water used in gauging, 32 per cent of cement.

Age, set in air, 1 month 29 days.

Weight per cubic foot, 126.9 pounds.

Dimensions, 24".20 × 3".92 × 6".06.

Sectional area, 23.76 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.           E (100-1,000) = 1,286,000 pounds per square inch. Crack. Ultimate strength. Failed on second application of 1,200 pounds per square inch.
2,376	100	0.	0.	
4,752	200	.0015	.0004	
7,128	300	.0029	.0005	
9,504	400	.0044	.0010	
11,880	500	.0064	.0017	
14,256	600	.0084	.0021	
16,632	700	.0112	.0034	
19,008	800	.0146	.0049	
21,384	900	.0187	.0070	
23,760	1,000	.0241	.0101	
26,136	1,100	.0333	.0178	
28,512	1,200	.0485	.0207	

No. 1496.

Marks, S. July 11.

Composition: Silica cement, 1; sand, 2.

Water used in gauging, 44 per cent of cement.

Age, set in air, 1 month 28 days.

Weight per cubic foot, 122.4 pounds.

Dimensions, 24".20 × 3".92 × 6".03.

Sectional area, 23.64 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.     E (100-500) = 909,000 pounds per square inch. Ultimate strength.
2,364	100	0.	0.	
4,728	200	.0024	.0006	
7,092	300	.0055	.0019	
9,456	400	.0101	.0040	
11,820	500	.0172	.0084	
14,184	600	.0350	.0228	
14,600	618	.....	.....	

## No. 1497.

Marks, S. July 12.

Composition: Silica cement, 1; sand, 3.

Water used in gauging, 58 per cent of cement.

Age, set in air, 1 month 27 days.

Weight per cubic foot, 120.8 pounds.

Dimensions, 24".16 × 3".90 × 6".03.

Sectional area, 23.52 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,352	100	0.	0.	Initial load.
4,704	200	.0042	.0017	
7,056	300	.0113	.0059	
9,408	400	.0320	.0225	Crack. E (100-400) = 632,000 pounds per square inch.
9,500	404	.....	.....	Ultimate strength.

## No. 1498.

Marks, S. July 11.

Composition: Silica cement, neat.

Water used in gauging, 20 per cent of cement.

Age, set in air, 1 month 28 days.

Weight per cubic foot, 116.3 pounds.

Dimensions, 24".06 × 3".92 × 6".02.

Sectional area, 23.60 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,360	100	0.	0.	Initial load.
4,720	200	.0017	.0002	
7,080	300	.0033	.0004	
9,440	400	.0047	.0005	
11,800	500	.0060	.0006	
14,160	600	.0075	.0010	
16,520	700	.0091	.0011	
18,880	800	.0109	.0012	
21,240	900	.0124	.0018	
23,600	1,000	.0146	.0024	E (100-1,000) = 1,475,000 pounds per square inch.
28,320	1,200	.0184	.0038	
33,040	1,400	.0231	.0047	
37,760	1,600	.0292	.0086	
42,480	1,800	.0365	.0105	
47,200	2,000	.0445	.0144	Cracks E (1,000-2,000) = 1,117,000 pounds per square inch.
51,920	2,200	.0580	.0224	
56,700	2,400	.....	.....	Ultimate strength.

No. 1473.

Marks, Aus. March 15.

Composition: Austin cement, neat.

Water used in gauging, 34.3 per cent of cement.

Age, set in air, 2 months 14 days.

Weight per cubic foot, 100.6 pounds.

Dimensions, 24".00 × 3".89 × 6".01.

Sectional area, 23.26 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>• Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,326	100	0.	0.	Initial load.
4,652	200	.0035	.0003	
6,978	300	.0071	.0009	
9,304	400	.0119	.0017	
11,630	500	.0174	.0033	E (100-500) = 567,000 pounds per square inch.
13,956	600	.0266	.0070	
14,200	610			Ultimate strength.

No. 1472.

Marks, N. & R. March 14.

Composition: Newark & Rosendale cement, neat.

Water used in gauging, 37.1 per cent of cement.

Age, set in air, 2 months 15 days.

Weight per cubic foot, 99.5 pounds.

Dimensions, 24".00 × 3".89 × 6".00.

Sectional area, 23.34 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,384	100	0.	0.	Initial load.
4,668	200	.0080	.0019	
7,002	300	.0136	.0036	
9,336	400	.0200	.0065	
11,670	500	.0263	.0098	E (100-500) = 485,000 pounds per square inch.
14,004	600	.0335	.0151	Cracked along one edge.
16,338	700	.0665	.0345	Ultimate strength.

No. 1476.

Marks, N. &amp; R. May 1.

Composition: Newark and Rosendale cement, neat.

Water used in gauging, 37 per cent of cement.

Age, set in water, 1 month. (First day in air.)

Weight per cubic foot (immediately after being taken from the water), 120 pounds.

Dimensions, 24".07 × 3".86 × 6".08.

Sectional area, 23.47 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (100-500) = 988,000 pounds per square inch.
2,347	100	0.	0.	
4,694	200	.0019	.0001	
7,041	300	.0041	.0004	
9,388	400	.0064	.0006	
11,735	500	.0091	.0010	
14,082	600	.0122	.0014	
16,429	700	.0155	.0022	
18,776	800	.0230	.0042	
.....	200	.0064	.....	
.....	300	.0087	.....	
.....	400	.0115	.....	
.....	500	.0146	.....	
.....	600	.0177	.....	
.....	500	.0159	.....	
.....	400	.0136	.....	
.....	300	.0110	.....	
.....	200	.0082	.0048	

Test discontinued. Prism returned to the water bath.

No. 1476a.

Test resumed after an interval of 4 months.

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,347	100	0.	0.	Micrometer reset at zero.
4,694	200	.0011	0.	
9,388	400	.0030	0.	
14,082	600	.0052	.0001	
18,776	800	.0075	.0002	
23,470	1,000	.0101	.0002	E (100-1,000)=1,818,000 pounds per square inch.
28,164	1,200	.0127	.0008	
32,858	1,400	.0155	.0006	
37,552	1,600	.0186	.0007	
42,246	1,800	.0220	.0011	
46,940	2,000	.0253	.0015	E (1,000-2,000)=1,342,000 pounds per square inch.
51,634	2,200	.0310	.0020	
56,328	2,400	.0368	.0030	
			.0024	After 5 minutes' rest.
.....	200	.0035	.....	
.....	400	.0058	.....	
.....	600	.0084	.....	
.....	800	.0116	.....	
.....	1,000	.0144	.....	
.....	1,200	.0177	.....	
.....	1,400	.0208	.....	
.....	1,600	.0241	.....	
.....	1,800	.0274	.....	
.....	2,000	.0303	.0032	
61,022	2,600	.0452	.0045	
63,800	2,720	.....	.....	Ultimate strength.

No. 1487.

Marks, O. June 27.

Composition: Obelisk cement, neat.

Water used in gauging, 40.5 per cent of cement.

Age, set in air, 2 months 8 days.

Weight, per cubic foot, 107.0 pounds.

Dimensions, 24".02 x 3".89 x 6".05.

Sectional area, 23.53 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,353	100	0.	0.	Initial load.
4,706	200	.0025	.0005	
7,059	300	.0050	.0009	
9,412	400	.0076	.0013	
11,765	500	.0102	.0020	E (100-500)=976,000 pounds per square inch.
14,118	600	.0138	.0031	
16,471	700	.0173	.0044	
18,824	800	.0213	.0060	
21,177	900	.0258	.0078	Cracked along corner.
23,530	1,000	.0323	.0120	E (500-1,000)=826,000 pounds per square inch.
25,883	1,100	.0396	.0157	
28,236	1,200	.0468	.0245	
33,700	1,430	.....	.....	Ultimate strength.

No. 1488.

Marks, O. June 28.

Composition: Obelisk cement, neat.

Water used in gauging, 35 per cent of cement.

Age, set in air, 2 months 7 days.

Weight, per cubic foot, 116.6 pounds.

Dimensions, 24".00 × 3".88 × 6".04.

Sectional area, 23.44 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.
Total.	Per square inch.	Compression.	Set.	
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	
2,344	100	0.	0.	Initial load.
4,688	200	.0019	0.	
7,032	300	.0038	.0005	
9,376	400	.0059	.0009	
11,720	500	.0080	.0015	
14,064	600	.0106	.0022	
16,408	700	.0131	.0029	
18,752	800	.0158	.0039	
21,096	900	.0190	.0053	
23,440	1,000	.0228	.0069	E (100-1,000) = 1,132,000 pounds per square inch.
25,784	1,100	.0270	.0094	
28,128	1,200	.0306	.0110	Cracks.
30,472	1,300	.0358	.0144	
32,816	1,400	.0413	.0170	
35,160	1,500	.0470	.0206	
-----	200	.0214	-----	
-----	400	.0250	-----	
-----	600	.0288	-----	
-----	800	.0329	-----	
-----	1,000	.0370	-----	
-----	1,200	.0413	-----	
-----	1,000	.0389	-----	
-----	800	.0358	-----	
-----	600	.0325	-----	
-----	400	.0286	-----	
-----	200	.0240	.0215	
37,504	1,600	.0535	.0261	
39,848	1,700	.0624	.0304	
44,500	1,900	-----	-----	Ultimate strength.

No. 1489.

Marks, O. June 30.

Composition: Obelisk cement, 1; sand, 1.

Water used in gauging, 42 per cent of cement.

Age, set in air, 2 months 5 days.

Weight per cubic foot, 121.6 pounds.

Dimensions, 24".10 × 3".90 × 6".02.

Sectional area, 23.48 square inches.

Gauged length, 20".

Applied loads.		In gauged length.		Remarks.	
Total.	Per square inch.	Compression.	Set.		
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>		
2,348	100	0.	0.	Initial load.	
4,690	200	.0013	0.		
7,044	300	.0026	.0003		
9,392	400	.0045	.0009		
11,740	500	.0069	.0016		
14,088	600	.0096	.0027		
16,436	700	.0123	.0038		
18,784	800	.0167	.0058		
21,132	900	.0211	.0082		
23,480	1,000	.0274	.0117		E (100-1,000) = 1,146,000 pounds per square inch.
25,828	1,100	.0354	.0171		
28,176	1,200	.0471	.0248		
30,524	1,300	.0638	.0379		
31,300	1,330	.....	.....	Ultimate strength.	

TABULATION OF THE ELASTIC PROPERTIES AND COMPRESSIVE STRENGTH OF CEMENT AND MORTAR PRISMS.

Prisms which set in water were weighed immediately after they were removed from the bath and tested while wet.

No. of test.	Marks.	Brand of cement.	Composition.			Age in—			Modulus of elasticity—		Permanent sets after loads per square inch of—		Compressive strength per square inch.	Remarks.
			Cement.	Sand.	Water.	Mos.	Days.	Air.	Water.	Between loads per square inch of 500 and 2,000.	At highest stress observed.	Inch.		
1468	Alp. Mar. 8	Alpha	Neat.			Per ct.								
1469	Alp. Mar. 8	Alpha	Neat.			21.9	185.5	1						
1474	Alp. Apr. 26	Alpha	Neat.			21.9	187.3	2	1					
1474a	Alp. Apr. 26	Alpha	Neat.			21.9	187.3	2	5					
1471	Atl. Mar. 13	Atlas	Neat.			21.9	184.7	2	16					
1471a	Atl. Mar. 13	Atlas	Neat.			21.9	184.7	6	16					
1499	L. July 14	Lehigh	Neat.			27.0	129.2	1	26					
1500	L. July 15	do	Neat.	1		34.0	133.0	1	26					
1501	L. July 16	do	Neat.			25.0	135.9	1	1	26				
1477	Pen. June 17	Peninsular	Neat.			22.2	135.3	2	13					
1478	Pen. June 18	do	Neat.			27.5	138.0	1	2	14				
1479	Pen. June 19	do	Neat.	1		32.5	133.4	2	13					
1480	Pen. June 20	do	Neat.	1		31.8	139.5	1	2	12				
1481	Pen. June 21	do	Neat.	1		41.1	125.4	2	21					
1482	Pen. June 21	do	Neat.	1		2	46.4	136.1	1	2	13			
1483	Pen. June 23	do	Neat.	1		3	68.0	116.5	2	20				
1484	Pen. June 23	do	Neat.	1		3	68.3	130.7	1	2	11			
1485	Pen. June 14	do	Neat.	1		4	87.0	118.4	2	21				
1486	Pen. June 24	do	Neat.	1		4	87.0	128.4	1	2	11			
1466	☆ Mar. 6	Star, with plaster.	Neat.			25.0	134.0	1						
1467	☆ Mar. 7	do	Neat.			20.0	134.0	1						
1467a	☆ Mar. 7	do	Neat.			20.0	134.0	6						
1470	☆ Mar. 12	Star, without plaster.	Neat.			28.1	128.0	1						
1469	W H Mar. 10	Whitehall	Neat.			21.2	137.0	1						
1469a	W H Mar. 10	Whitehall	Neat.			21.2	137.0	7						
1475	W H Apr. 30	Whitehall	Neat.			21.2	137.0	1	1					



1475a	1475b	1475c	1475d	1475e	1475f	1475g	1475h	1475i	1475j	1475k	1475l	1475m	1475n	1475o	1475p	1475q	1475r	1475s	1475t	1475u	1475v	1475w	1475x	1475y	1475z
1475a	W/H Sept. 18	Whitehall	Neat.	21.8	186.1	1	6	8,614,000	3,704,000	-.0001	0	+.0001	9,180												
1475b	W/H Oct. 6	do	Neat.	21.8	186.1	21	6	4,110,000	8,101,000	-.0002	0	0	7,990												
1475c	W/H Oct. 18	do	Neat.	21.8	187.0	7	7	8,409,000	2,667,000	0	0	.0008	5,960												
1475d	W/H Oct. 21	do	Neat.	21.3	186.7	2	2	8,125,000	8,196,000	0	0	.0008	5,000												
1475e			Neat.	21.3	186.7	1	1	8,158,000	2,613,000	-.0004	0	.0013	4,680												
1490	C July 2	Cathedral	Neat.	28.8	112.5	2	3	1,428,000	1,428,000	.0009	.0029		2,520												
1491	C July 3	do	1	35.6	123.9	2	3	1,889,000	1,889,000	.0006	.0028	.0151	2,290												
1492	C July 6	do	1	2	123.5	2	2	1,838,000	1,838,000	.0020	.0084		1,250												
1493	C July 7	do	1	63.3	120.1	2	2	1,869,000	1,869,000				600												
1494	S July 9	Silica	Neat.	25.8	117.8	1	28	1,205,000	1,205,000	0	.0011	.0124	2,520												
1495	S July 10	do	1	24.0	114.9	1	23	1,206,000	1,206,000	.0021	.0101		1,310												
1496	S July 11	do	1	27	124.9	1	27	1,206,000	1,206,000	.0228			616												
1497	S July 12	do	1	59.0	123.8	1	27	682,000	682,000				404												
1498	S July 11	do	Neat.	20.0	116.3	1	28	1,117,000	1,117,000	.0010	.0024	.0144	2,400												
1473	Aus Mar. 15	Austin	Neat.	34.3	100.6	2	14	567,000	567,000	.0070			610												
1472	N & R Mar. 14	Newark and Rosen- dale	Neat.	37.1	99.5	2	15	485,000	485,000	.0151			700												
1476	N & R May 1	do	Neat.	37.0	120.0	1	1	988,000	988,000	.0014															
1476a			Neat.	37.0	120.0	1	5	1,342,000	1,342,000	.0001	.0002	.0015	2,720												
1487	O June 27	Obelisk	Neat.	40.5	107.0	2	8	828,000	828,000	.0081	.0120		1,430												
1488	O June 28	do	Neat.	35.0	116.6	2	7	1,132,000	1,132,000	.0022	.0059		1,900												
1489	O June 30	do	1	42.0	121.6	2	5	1,146,000	1,146,000	.0027	.0117		1,330												

Do.

## CEMENT GROUTS.

Star Portland cement, with and without plaster in its composition, gauged with hot and cold water.

This series of grouts was made with cement which was 3 months old at the time of gauging, from the time of grinding.

Batch 1, cement without plaster, was gauged with 27½ per cent of ice water at the temperature of about 32° F. It made a mortar of ordinary consistency, as generally used in stone masonry. Two minutes after mixing the batch stiffened. It was broken up and at once tamped into the molds.

Batch 2 was gauged with 40 per cent of water at the temperature of about 32° F. There was an interval of 4 minutes after mixing before the material took a thick, pasty state. Six minutes after mixing it was tamped into the molds. When broken up it was a stiff, granular mass, but flushed water when tamped.

Batch 3 was made from a barrel of cement freshly opened. The other material of this series came from a barrel which had been opened for a number of weeks. This batch was gauged with the same amount of water as No. 2, and at the same temperature. It made a thick grout which lost some of its consistency upon standing, and water came to the surface. It had not thickened 2½ hours after mixing, at which time the surface water was stirred in and the material put in molds.

Batch 4 was gauged with 50 per cent water at 32° F. Sixteen minutes after mixing the batch had acquired a thick, gelatinous state, and was then put into molds.

Batch 5 was gauged with 40 per cent of hot water at the temperature of 190° F. It made a thin mortar, which was at once put into the molds.

Batch 6 was gauged with 50 per cent of hot water at the temperature of 170° F. It made a very thick grout, which was immediately poured into the molds.

Batch 7 was gauged with 40 per cent of water at 32° F. In this instance the cement was also cooled before using. The mixture did not thicken into a paste, and 7 hours after gauging was put into the molds, a fairly thick grout.

Batch 8 was gauged with 30 per cent of water at 32° F. The cement was not cooled. The water was absorbed and the material became a fairly stiff paste 25 minutes after mixing, and was in the molds 5 minutes later.

Batch 9 was made of cement with plaster, the ordinary commercial cement. It was gauged with 30 per cent of water at 32° F. Forty minutes after mixing the material had stiffened, and was then put into molds.

The material of the several batches set in air, and were tested when a few days over a month old.

CEMENT GROUTS.

CEMENT GROUTS.

No. of batch.	Brand of cement.	Composition.			Time of setting in air.	Dimensions.			Sec-tional area.	Compressive strength.			Remarks.
		Ce-ment.	Sand.	Amount of water.		Tem-perature of water.	Height.	Compressed sur-face.		Inches.	Total.	Per square inch.	
		Per ct.	of.	Days.	Inches.	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.		
1	Star Portland, without plaster.	Neat.	27.5	32	34	4.02	3.97	4.01	15.92	51,900	8,260		
						3.96	4.05	4.02	16.28	68,700	8,910		
						4.04	3.99	4.05	16.16	58,100	8,590		
						4.00	4.05	4.07	16.48	60,280	8,650		
						3.96	4.01	4.06	16.28	58,800	8,270	3,540	
2	do.	Neat.	40	32	34	4.01	3.96	4.00	15.84	38,400	2,420		
						3.93	4.00	3.99	15.96	42,100	2,640		
						4.01	4.00	4.01	16.04	40,100	2,500		
						3.96	4.05	4.02	16.28	40,200	2,470		
						4.01	3.99	4.00	15.96	39,500	2,480		
						4.06	3.96	4.02	15.92	36,100	2,270	2,460	
3	do.	Neat.	40	32	34	4.05	3.99	3.98	15.88	62,500	3,940		
						3.99	4.01	3.99	16.00	65,100	4,070		
						4.03	4.00	3.98	15.92	68,200	4,100		
						4.00	4.01	3.96	15.88	60,900	3,840		
						4.00	4.03	3.97	16.00	61,600	3,860		
						4.06	3.99	3.99	11.49	41,700	3,680	3,910	
4	do.	Neat.	50	32	34	4.02	4.00	4.00	16.00	32,600	2,080		
						4.05	3.99	4.06	16.20	31,300	1,930		
						4.06	4.00	4.01	16.04	32,100	2,000		
						4.06	4.00	4.01	16.04	29,400	1,880		
						4.09	4.00	4.01	16.04	28,500	1,780		
						4.07	4.00	4.03	16.12	27,200	1,690	1,860	
5	do.	Neat.	40	190	34	3.99	4.02	4.04	16.24	56,200	3,460		
						3.98	4.06	4.01	16.36	50,000	3,450		
						4.02	3.98	4.02	16.00	40,200	2,510		
						3.99	4.03	4.00	16.00	47,600	2,970		
						4.11	3.99	4.04	16.12	54,000	3,350		
						4.02	3.96	3.92	12.36	32,100	2,600	3,060	

CEMENT GROUTS—Continued.

No. of batch.	Brand of cement.	Composition.				Time of setting in air.	Dimensions.			Compressive strength.			Remarks.	
		Ce-ment.	Sand.	Amount of water.	Tem-perature of water.		Height.	Compressed sur-face.		Sec-tional area.	Total.	Per square inch.		Mean.
								Inches.	Inches.					
6	Star Portland, without plaster.	Neat.	.....	Per ct. 50	°F. 170	Days 34	4.04	3.96	4.02	16.04	25,200	2,190		
		.....	.....	.....	.....	.....	4.02	4.01	4.01	16.12	29,200	1,860		
		.....	.....	.....	.....	.....	4.01	4.06	4.02	16.36	33,900	2,020		
		.....	.....	.....	.....	.....	4.00	4.02	4.02	16.16	34,300	2,120		
		.....	.....	.....	.....	.....	4.04	4.04	4.00	16.16	31,500	1,950		
		.....	.....	.....	.....	.....	4.01	4.06	4.00	16.24	31,500	1,940	2,010	
7	.....do.....	Neat.	.....	40	32	32	4.01	3.96	3.96	15.64	55,100	3,520		
		.....	.....	.....	.....	.....	4.02	3.96	4.01	15.84	53,200	3,360		
		.....	.....	.....	.....	.....	4.06	3.97	4.02	15.96	54,300	3,400		
		.....	.....	.....	.....	.....	4.04	3.93	4.00	15.72	53,300	3,390		
		.....	.....	.....	.....	.....	4.01	3.96	3.97	15.72	51,000	3,240	3,380	
8	.....do.....	Neat.	.....	30	32	32	4.08	4.00	4.00	16.00	58,900	3,690		
		.....	.....	.....	.....	.....	4.09	4.02	3.97	15.96	56,500	3,540		
		.....	.....	.....	.....	.....	4.14	4.00	3.96	15.84	60,100	3,790		
		.....	.....	.....	.....	.....	4.09	4.00	3.98	14.32	36,500	2,550	3,380	
9	Star Portland, with plaster..	Neat.	.....	30	32	32	4.04	3.99	3.91	15.59	120,400	7,720		
		.....	.....	.....	.....	.....	4.02	3.97	3.91	15.51	119,800	7,720		
		.....	.....	.....	.....	.....	4.02	3.96	3.95	15.64	121,600	7,770		
		.....	.....	.....	.....	.....	4.02	3.97	3.98	16.80	109,600	6,980		
		.....	.....	.....	.....	.....	4.06	3.98	3.94	15.68	112,800	7,190	7,470	

TENSILE AND COMPRESSIVE TESTS AND DETERMINATION OF FINENESS AND SPECIFIC GRAVITY OF CEMENT.

Brand, Peninsular cement, neat.

TENSILE TESTS.

Ten briquettes of each kind tested.

Water.	Age in—		Tensile strength per square inch.		
	Air.	Water.	Maximum.	Minimum.	Mean.
<i>Per cent.</i>	<i>Days.</i>	<i>Days.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>
20	1	.....	221	177	196
20	7	.....	393	301	354
20	28	.....	641	487	566
20	1	6	535	653	780
20	1	27	952	857	906
22	1	.....	209	156	189
22	7	.....	482	303	392
22	28	.....	513	421	457
22	1	6	724	502	666
22	1	27	1,010	782	866
25	1	.....	223	148	190
25	7	.....	475	301	402
25	28	.....	552	393	450
25	1	6	388	251	329
25	1	27	807	696	758

COMPRESSIVE TESTS, 2" CUBES.

Ten cubes of each kind tested.

Water.	Age in—		Compressive strength per square inch.		
	Air.	Water.	Maximum.	Minimum.	Mean.
<i>Per cent.</i>	<i>Days.</i>	<i>Days.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>
20	1	.....	801	654	717
20	7	.....	3,430	2,700	3,040
20	28	.....	4,370	3,490	3,990
20	1	6	4,830	3,770	4,250
20	1	27	8,280	5,730	7,370
22	1	.....	670	530	595
22	7	.....	3,680	3,010	3,290
22	28	.....	4,310	3,030	3,760
22	1	6	5,370	3,620	4,720
22	1	27	7,810	5,360	6,870
25	1	.....	450	398	430
25	7	.....	3,210	2,120	2,610
25	28	.....	3,550	2,630	3,130
25	1	6	4,440	3,360	3,890
25	1	27	8,740	6,310	7,590

<b>Fineness:</b>	<b>Per cent.</b>
Retained on 98×100 sieve.....	4.95
Passed by 98×100 sieve and retained on 174×182 bolting cloth.....	13.75
Passed by 174×182 bolting cloth.....	75.30

<b>Specific gravity:</b>	
As taken from barrel.....	3.20
After mixing with 22 per cent of water, setting 7 days in air, reground, and heating to a constant weight at 110° C.....	2.81

*Chemical analysis.*


	Per cent.
Silica .....	24.21
Oxide of iron .....	8.88
Alumina .....	11.25
Lime .....	56.41
Magnesia .....	1.50
Sulphur trioxide .....	1.25
Carbon dioxide .....	1.50

COMPRESSION TESTS OF CEMENT-MORTAR CUBES FOR THE U. S. ENGINEER CORPS.

The following data, with regard to composition and age, were furnished by the Engineer Corps:

Marks	Date of fabrication.	Age when broken.			Cement.		Sand.		Parts by weight of sand to one of cement.	Water to dry aggregates.
					Kind.	Brand.	Kind.	Fineness.		
1A ..	1899. Dec. 4	Yrs. 2	Mos. 5	Days. 20	Portland	Atlas	Superior Entry.	43.62 per cent passing 30 sieve.	1-1	Per cent. 9.07
2A ..	Dec. 5	2	5	19	.....do.....	.....do.....	.....do.....	.....do.....	1-1½	8.39
3A ..	Dec. 8	2	5	16	.....do.....	.....do.....	.....do.....	.....do.....	1-2	7.94
4A ..	Dec. 7	2	5	17	.....do.....	.....do.....	.....do.....	.....do.....	1-2¼	7.61
5A ..	Dec. 9	2	5	15	.....do.....	.....do.....	.....do.....	.....do.....	1-3	7.36
6A ..	Dec.11	2	5	13	.....do.....	.....do.....	.....do.....	.....do.....	1-3½	7.17
7A ..	Dec.12	2	5	12	.....do.....	.....do.....	.....do.....	.....do.....	1-4	7.03

Cubes were kept 3 months in dry air, 15 days in water at 65° F., then kept in air until date of crushing.



Compressed surfaces faced with plaster of paris to secure even bearings in the testing machine.

Marks.	Dimensions.				Sectional area.	First crack.	Ultimate strength.	
	Height.	Compressed surface.					Total.	Per square inch.
	<i>Inches.</i>	<i>Inches.</i>	<i>Inches.</i>	<i>Sq. inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
1 A ..	6.03	6.05	5.97	36.12	409,200	409,200	11,330	
2 A ..	6.02	5.98	6.03	36.06	371,000	374,500	10,390	
3 A ..	6.03	6.02	5.97	35.94	341,000	342,000	9,520	
4 A ..	6.02	5.97	6.03	36.00	289,000	292,100	8,110	
5 A ..	6.04	5.98	6.04	36.12	219,000	221,900	6,140	
6 A ..	6.03	5.97	6.03	36.00	226,000	228,000	6,280	
7 A ..	6.02	6.03	5.98	36.06	183,000	188,500	5,230	


CONCRETE.

ADDITIONAL TESTS ON CONCRETE CUBES MADE AT WATERTOWN ARSENAL.

Tests of cubes 3 years old, continued from Report 1901, page 600. Cubes set in air in a dry, cool building.

Marks.	Brand of cement.	Composition.		Age.	Weight.		Dimensions.		Sec- tional area.	First crack.	Compressive strength.		Remarks.					
		Ce- ment.	Sand.		Broken stone.	Total.	Per cubic foot.	Height.			Compressed surface.	Total.		Per square inch.				
350	Alpha.	1	2	4-2 1/2" trap.	Yrs.	Days.	Lbs.	Ozs.	147.9	8	11.86	12.06	145.32	373,800	2,580	1 lb. 4 ozs.	Loss in weight during last 33 months.	
351	.....	.....	.....	.....	3	9	147	8	147.9	8	11.86	12.06	145.32	373,800	2,580	1 lb. 4 ozs.		
352	.....	.....	.....	.....	3	9	150.2	8	150.2	8	11.70	12.04	144.60	359,100	2,490	1 lb. 8 ozs.		
353	.....	.....	.....	.....	3	9	150.8	8	150.8	8	11.94	12.02	144.46	358,000	2,700	1 lb. 8 ozs.		
354	.....	.....	.....	.....	3	9	149	4	151.4	4	11.80	12.01	144.38	341,000	2,580	0 lb. 12 ozs.	Loss in weight during last 33 months.	
355	.....	.....	.....	.....	3	9	150	4	152.1	4	11.85	12.01	144.12	322,000	2,570	0 lb. 4 ozs.		
356	Alpha.	1	2	4-1" and 2 1/2" trap.	3	11	150	0	150.5	0	11.93	12.02	144.38	328,000	2,560	0 lb. 8 ozs.		
357	.....	.....	.....	.....	3	11	146	0	147.2	0	11.87	12.03	144.48	358,000	2,570	2 lbs. 0 ozs.		Loss in weight during last 33 months.
358	.....	.....	.....	.....	3	11	148	12	148.0	12	11.96	12.06	145.08	360,000	2,560	0 lb. 4 ozs.		
359	.....	.....	.....	.....	3	11	148	0	148.4	0	11.89	12.08	144.84	363,000	2,570	0 lb. 8 ozs.		
360	.....	.....	.....	.....	3	11	147	4	147.0	4	11.95	12.01	144.84	354,000	2,490	0 lb. 12 ozs.		
310	Alpha.	1	2	4-1 1/2" and 2 1/2" trap.	3	16	150	8	150.9	8	11.89	12.08	144.96	379,000	3,130	1 lb. 8 ozs.	Loss in weight during last 32 months.	
311	.....	.....	.....	.....	3	16	148	12	148.6	12	11.96	12.03	144.60	391,000	2,760	1 lb. 8 ozs.		
312	.....	.....	.....	.....	3	16	145.6	11	145.6	11	11.86	12.04	145.08	368,000	2,630	1 lb. 0 ozs.		
313	.....	.....	.....	.....	3	16	153	0	152.6	0	11.96	12.06	144.96	381,000	2,560	1 lb. 0 ozs.		Loss in weight during last 32 months.
314	.....	.....	.....	.....	3	16	151	12	150.6	12	12.01	12.07	144.84	348,000	2,500	1 lb. 4 ozs.		
422	Steel.	1	2	4-2 1/2" trap.	3	.....	148	8	149.8	8	11.82	12.02	144.84	317,000	2,190	2 lbs. 8 ozs.	Loss in weight during last 32 months.	
423	.....	.....	.....	.....	3	.....	150	4	151.6	4	11.86	12.02	144.36	298,000	2,040	1 lb. 12 ozs.		
424	.....	.....	.....	.....	3	.....	149	8	150.7	8	11.89	12.02	144.24	294,000	2,040	2 lbs. 8 ozs.		
425	.....	.....	.....	.....	3	.....	150	7	150.7	7	11.96	12.00	144.00	270,000	2,160	1 lb. 12 ozs.		
426	.....	.....	.....	.....	3	.....	146	8	147.8	8	11.87	12.00	144.24	289,000	2,580	2 lbs. 8 ozs.		

COMPRESSION TESTS OF 12-INCH CONCRETE CUBES FURNISHED BY THE  
BOSTON ELEVATED RAILWAY COMPANY.



Atlas cement used. Set in air.

Marks.	Composition.			Weight.		Age. <i>Days.</i>
	Cement.	Sand.	Stone.	Total.	Per cubic foot.	
1	1	2	4	<i>Pounds.</i> 151	<i>Pounds.</i> 149.5	7
2	1	2	4	152	150.5	7
3	1	2	4	154.5	151.5	7
4	1	3	6	154	149.5	7
5	1	3	6	158	150.0	7
6	1	3	6	152.5	148.0	7

Compressed surfaces faced with plaster of paris.

Marks.	Dimensions.			Sectional area.	First crack. <i>Pounds.</i>	Compressive strength.	
	Height.	Compressed surface.				Total. <i>Pounds.</i>	Per square inch. <i>Pounds.</i>
1	<i>Inches.</i> 12.02	<i>Inches.</i> 12.06	<i>Inches.</i> 12.02	<i>Sq. inches.</i> 144.96	<i>Pounds.</i> 174,000	<i>Pounds.</i> 187,100	<i>Pounds.</i> 1,290
2	12.00	12.11	12.06	146.05	162,500	177,800	1,220
3	12.02	12.12	12.11	146.77	188,000	205,600	1,400
4	12.09	12.08	12.16	146.89	117,000	135,500	1,260
5	12.09	12.03	12.15	146.16	124,000	161,100	1,100
6	12.08	12.15	12.14	147.50	99,000	118,400	800



---

---

**GLASS.**

---

**TRANSVERSE TESTS.**

---

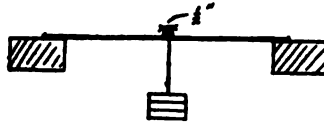
---



## GLASS.

## TRANSVERSE TESTS.

Lights of common window glass supported at the ends and loaded at the middle.



Length, 9 feet 6 inches.  
 Depth, .121 inch.  
 Width, 4.95 inches.  
 Span, 2 feet.

Total load at middle.	Deflections.	Successive deflections.	Set.	Remarks.
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
1.5	0.	0.	0.	Initial load.
2.0	.0198	.0198	0.	
2.5	.0350	.0157	.....	
3.0	.0584	.0184	.....	
3.5	.0717	.0183	.....	
4.0	.0909	.0192	.....	
4.5	.1099	.0190	.....	
5.0	.1288	.0189	.0003	
5.5	.1480	.0192	.....	
6.0	.1667	.0187	.....	
6.5	.1860	.0193	.....	
7.0	.2047	.0187	.....	
7.5	.2239	.0192	.....	


Modulus of rupture, 3,730 pounds per square inch. Modulus of elasticity (between 4 and 7 pounds), 10,300,000 pounds per square inch.

Length, 2 feet 2 inches.  
 Depth, .119 inch.  
 Width, 5.02 inches.  
 Span, 2 feet.

Total load at middle.	Deflections.	Successive deflections.	Set.	Remarks.	
<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>		
1.5	0.	0.	0.	Initial load.	
2.0	.0135	.0135	.....		
2.5	.0314	.0179	.....		
3.0	.0488	.0174	.....		
3.5	.0671	.0188	.....		
4.0	.0858	.0182	.....		
4.5	.1085	.0182	.....		
5.0	.1217	.0182	.0007		
5.5	.1400	.0188	.....		
6.0	.1583	.0188	.....		
6.0	.1599	.0016	.0011		After 18 hours under 6 pounds load.
6.0	.1595	.....	.....		

Glass ruptured 21 hours after the 6-pound load was applied—3 hours after the last set was taken.

Modulus of rupture, 3,040 pounds per square inch. Modulus of elasticity (between 3 and 6 pounds), 11,190,000 pounds per square inch.



---

---


## DOUGLAS FIR AND WHITE OAK WOODS.

---

TRANSVERSE AND SHEARING TESTS; ALSO OBSERVATIONS ON HEAT  
CONDUCTIVITY OF STICKS OVER WOOD FIRES AND A STICK  
EXPOSED TO LOW TEMPERATURE. EXPANSION CROSS-  
WISE THE GRAIN OF WOOD AFTER SUBMERSION.

---

---



## DOUGLAS FIR WOOD.

## DETAILS OF TRANSVERSE TESTS.

No. 717.

Marks, 7. (First specimen.)

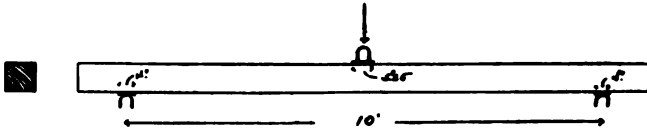
Length, 12 feet.

Breadth, 7".59.

Depth, 7".58.

Weight, 155 pounds. Weight per cubic foot, 32.33 pounds.

Rate of growth, 12 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.087	.087	.....	
2,000	.....	.110	.073	.002	
3,000	.....	.179	.069	.....	
4,000	.....	.252	.073	.008	
5,000	.....	.324	.072	.....	
6,000	.....	.398	.074	.006	
7,000	.....	.468	.070	.....	
8,000	.....	.541	.073	.008	
9,000	.....	.615	.074	.....	
10,000	.....	.687	.072	.011	
11,000	.....	.764	.077	.....	
12,000	.....	.838	.074	.014	
13,000	.....	.909	.071	.....	
14,000	.....	.984	.075	.017	
15,000	.....	1.069	.075	.....	
16,000	.....	1.142	.083	.....	
17,000	.....	1.222	.080	.....	Ultimate strength.
27,800	11,470	.....	.....	.....	

Splintering fracture on the tension side, with crushing of the fibers on the compression side in the vicinity of the middle shoe.





No. 718.

Marks, 12.

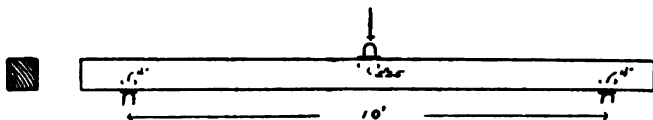
Length, 12 feet.

Breadth, 7".57.

Depth, 7".54.

Weight, 159 pounds. Weight per cubic foot, 33.43 pounds.

Rate of growth, 11 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.	
Total.	Maximum fiber stress per square inch.					
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>		
500		0.	0.		Initial load.	
1,000		.040	.040			
2,000		.117	.077	.008		
3,000		.194	.077			
4,000		.270	.076	.006		
5,000		.346	.076			
6,000		.421	.075	.009		
7,000		.498	.077			
8,000		.577	.079	.012		
9,000		.650	.078			
10,000		.726	.076	.016		
11,000		.804	.078			
12,000		.881	.077	.018		
13,000		.957	.076		F (2,000-12,000)=1,777,000 pounds per square inch.	
14,000		1.042	.085			
15,000		1.124	.082			
16,000		1.211	.087			
17,000		1.295	.084			
23,900	10,000					Ultimate strength.

Splintering fracture on the tension side, with crushing of the fibers on the compression side in the vicinity of the middle shoe.

No. 707.

Marks, 13.

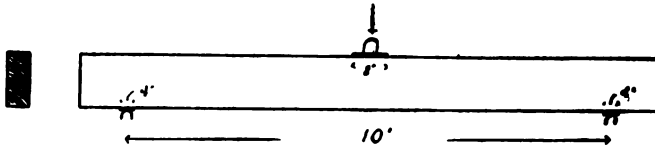
Length, 12 feet.

Breadth, 5".50.

Depth, 13".40.

Weight, 211 pounds. Weight per cubic foot, 34.35 pounds.

Rate of growth, 9 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
200		0.	0.		Initial load.
1,000		.023	.023		
2,000		.049	.026		
3,000		.075	.026		
4,000		.102	.027		
5,000		.128	.026		
6,000		.154	.026		
7,000		.178	.024		
8,000		.202	.024		
9,000		.226	.024		
10,000		.252	.026		
11,000		.277	.025		
12,000		.304	.027		
13,000		.331	.027		
14,000		.359	.028		
15,000		.388	.029		
16,000		.411	.023		
17,000		.439	.028		
18,000		.472	.053		
19,000		.509	.087		
20,000		.548	.084		
21,000					Shoe at middle indented the wood $\frac{1}{4}$ ". Shoe $5\frac{1}{2}$ " wide now used.
41,000	7,470				Shoe indented the wood $\frac{1}{2}$ ". Shoe $8\frac{1}{2}$ " wide now used. Ultimate strength.

The beam fractured on the tension side, 3 feet from middle of length, extending about 6 feet diagonally across the stick. Shoe at middle bearing indented the wood from  $\frac{1}{4}$ " to  $\frac{5}{8}$ ".

No. 720.

Marks, 15. (First specimen.)

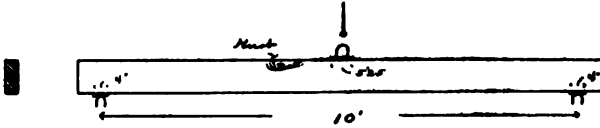
Length, 11.07 feet.

Breadth, 2".80.

Depth, 7".65.

Weight, 56 pounds. Weight per cubic foot, 38.98 pounds.

Rate of growth, 23 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (1,000-4,000) = 1,918,000 pounds per square inch.
200		0.	0.		
400		.088	.088		
600		.075	.087		
800		.111	.086		
1,000		.151	.040	.001	
2,000		.333	.182	.001	
3,000		.513	.180	.002	
4,000		.695	.182	.006	
5,000		.871	.176	.010	
6,000		1.061	.190		
6,200		1.100	.039		
6,400		1.187	.037		
6,600		1.183	.046		
6,800		1.227	.044		
7,000		1.277	.050		
10,200	11,200				Ultimate strength.

Splintering fracture on the tension side of the beam. Fibers crushed at the middle bearing.

No. 719.

Marks, 15. (Second specimen.)

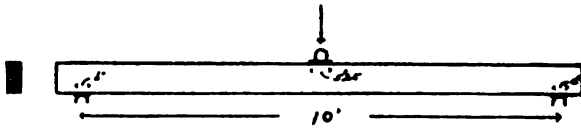
Length, 11.06 feet.

Breadth, 2".86.

Depth, 7".50.

Weight, 56 pounds. Weight per cubic foot, 33.97 pounds.

Rate of growth, 23 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200	.....	0.	0.	.....	Initial load.
400	.....	.089	.089	.....	
600	.....	.078	.089	.....	
800	.....	.116	.088	.....	
1,000	.....	.152	.086	.004	
2,000	.....	.589	.187	.008	
3,000	.....	.582	.198	.013	
4,000	.....	.717	.185	.016	
5,000	.....	.907	.190	.021	
6,000	.....	1.118	.211	.....	
6,200	.....	1.160	.042	.....	
6,400	.....	1.206	.046	.....	
6,600	.....	1.256	.050	.....	
6,800	.....	1.309	.053	.....	
7,000	.....	1.368	.059	.....	
7,700	8,610	.....	.....	.....	Ultimate strength.

Split along the grain diagonally from near the middle almost to the end.

## No. 712.

Marks, 22. (Tested perpendicular to rings of growth.)


Length, 12.02 feet.

Breadth, 4".53.

Depth, 4".51.

Weight, 61 pounds. Weight per cubic foot, 35.74 pounds.

Rate of growth, 12 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflections.	Successive deflections.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inches.	Inch.	Inch.	
200	.....	0.	0.	.....	Initial load.
400	.....	.086	.086	.....	
500	.....	.185	.049	.....	
1,000	.....	.367	.232	.001	
1,500	.....	.594	.227	.....	
2,000	.....	.827	.238	.010	
2,500	.....	1.075	.248	.....	E (1,000-2,000) = 2,305,000 pounds per square inch.
3,000	.....	1.312	.237	.....	
3,500	.....	1.555	.248	.....	
4,000	.....	1.809	.254	.....	
4,900	9,570	.....	.....	.....	
					Ultimate strength.

Splintering fracture on the tension side, taking a diagonal direction a distance of about 3 feet.

No. 713.

No. 22. (Tested parallel to rings of growth.)


Length, 12 feet.

Breadth, 4".49.

Depth, 4".50.

Weight, 60 pounds. Weight per cubic foot, 35.63 pounds.

Rate of growth, 12 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200	.....	0	0.	.....	Initial load.
400	.....	.091	.091	.....	
500	.....	.137	.046	.....	
1,000	.....	.369	.232	.001	
1,500	.....	.609	.240	.....	
2,000	.....	.855	.246	.011	
2,500	.....	1.100	.245	.....	E (1,000-2,000)=2,218,000 pounds per square inch.
3,000	.....	1.334	.234	.....	
4,500	8,910	.....	.....	.....	

Split along the grain diagonally, beginning at middle and extending almost to the end.

No. 708.

Marks, 28.

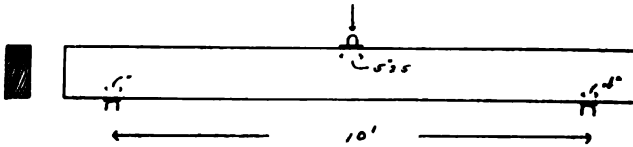
Length, 11.99 feet.

Breadth, 5".52.

Depth, 13".35.

Weight, 207 pounds. Weight per cubic foot, 33.74 pounds.

Rate of growth, 14 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
500		0.	0.		Initial load.
1,000		.014	.014		
2,000		.088	.024		
3,000		.062	.024		
4,000		.085	.023		
5,000		.108	.023		
6,000		.181	.023		
7,000		.154	.023		
8,000		.177	.023		
9,000		.199	.022		
10,000		.221	.022		
11,000		.245	.024		
12,000		.267	.022		
13,000		.290	.023		
14,000		.312	.022		
15,000		.336	.024		
16,000		.358	.022		
17,000		.381	.023		
18,000		.408	.022		
19,000		.426	.023		
20,000		.449	.023		
21,000		.472	.023		
22,000		.497	.025		
23,000		.520	.023		
24,000		.543	.023		
25,000		.566	.023		
26,000		.596	.029		
27,000		.621	.026		
28,000		.648	.027		
29,000		.673	.025		
30,000		.702	.029		
30,500					E (2,000-12,000)=1,436,000 pounds per square inch.
48,000	8,780				Load removed and a shoe 10" wide put in place at middle bearing. Ultimate strength.

Sheared along the grain in three places. Fibers crushed on the compression side near the middle.

No. 714.

Marks, 31. (Tested perpendicular to rings of growth.)


Length, 12 feet.

Breadth, 4".90.

Depth, 4".87.

Weight, 67.5 pounds. Weight per cubic foot, 33.92 pounds.

Rate of growth, 17 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200	.....	0.	0.	.....	Initial load.
500	.....	.120	.120	.....	
1,000	.....	.327	.207	.006	E (1,000-2,000)=1,875,000 pounds per square inch.
1,500	.....	.533	.206	.....	
2,000	.....	.746	.213	.018	
2,500	.....	.966	.210	.....	
3,000	.....	1.169	.213	.....	Ultimate strength.
3,500	.....	1.381	.212	.....	
5,350	8,290	.....	.....	.....	

Split along the grain diagonally, beginning on tension side.



No. 715.

Marks, 31. (Tested parallel to rings of growth.)

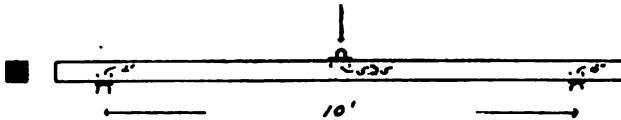
Length, 12 feet.

Breadth, 4".81.

Depth, 4".86.

Weight, 66 pounds. Weight per cubic foot, 33.89 pounds.

Rate of growth, 17 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.

Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200	.....	0.	0.	.....	Initial load.
500	.....	.128	.128	.....	
1,000	.....	.331	.208	.008	
1,500	.....	.539	.208	.....	
2,000	.....	.750	.211	.012	E (1,000-2,000)=1,885,000 pounds per square inch.
2,500	.....	.958	.208	.....	
3,000	.....	1.177	.219	.....	
3,500	.....	1.392	.215	.....	
5,100	8,080	.....	.....	.....	Ultimate strength.

Split along the grain diagonally from middle to one end.

No. 716.

Marks, 34. (First specimen.)

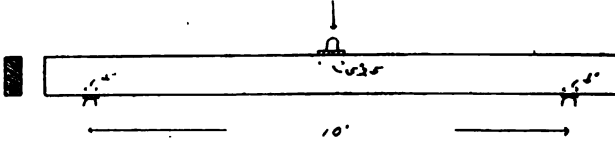
Length, 12 feet.

Breadth, 3".80.

Depth, 9".70.

Weight, 91 pounds. Weight per cubic foot, 29.62 pounds.

Rate of growth, 11 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.067	.067	.....	
1,500	.....	.117	.080	.....	
2,000	.....	.178	.066	.006	
2,500	.....	.229	.056	.....	
3,000	.....	.286	.067	.....	
3,500	.....	.344	.068	.....	
4,000	.....	.408	.059	.011	
4,500	.....	.461	.068	.....	
5,000	.....	.519	.068	.....	
5,500	.....	.577	.068	.....	
6,000	.....	.636	.069	.017	
6,500	.....	.696	.080	.....	
7,000	.....	.757	.061	.....	
7,500	.....	.822	.066	.....	
8,000	.....	.886	.063	.081	
8,500	.....	.943	.058	.....	
9,000	.....	1.010	.067	.....	
9,500	.....	1.084	.074	.....	
10,000	.....	1.156	.071	.....	
13,800	6,960	.....	.....	.....	Ultimate strength.

Splintering fractures on tension side extending half the depth of the beam. Fibers crushed on the compression side.

No. 736.

Marks, 34. (Second specimen.)

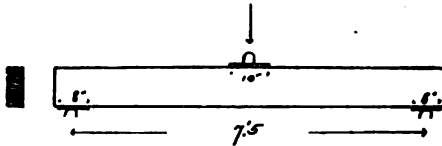
Length, 8.22 feet.

Breadth, 3".78.

Depth, 9".70.

Weight, 63 pounds. Weight per cubic foot, 30.08 pounds.

Rate of growth, 11 rings per inch.



Ends supported 7.5 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.            E (4,000-12,000)=1,277,000 pounds per square inch.
1,000	.....	0.	0.	.....	
2,000	.....	.048	.048	.....	
3,000	.....	.086	.048	.....	
4,000	.....	.128	.042	.006	
5,000	.....	.169	.041	.....	
6,000	.....	.213	.044	.....	
7,000	.....	.258	.040	.....	
8,000	.....	.294	.041	.009	
9,000	.....	.337	.043	.....	
10,000	.....	.380	.043	.....	
11,000	.....	.425	.045	.....	
12,000	.....	.471	.046	.018	
18,000	.....	.512	.041	.....	
14,000	.....	.557	.045	.....	
28,300	8,840	.....	.....	.....	Ultimate strength.

Beam fractured on the tension side. Fibers crushed at middle bearing.

No. 710.

Marks, 40. (First specimen.)

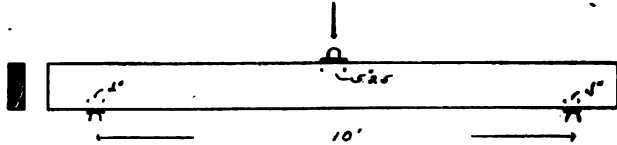
Length, 12 feet.

Breadth, 3".70.

Depth, 11".15.

Weight, 124 pounds. Weight per cubic foot, 36.04 pounds.

Rate of growth, 18 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inch.	Inch.	Inch.	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.027	.027	.....	
2,000	.....	.061	.064	.004	
3,000	.....	.134	.068	.....	
4,000	.....	.186	.062	.006	
5,000	.....	.241	.065	.....	
6,000	.....	.292	.061	.012	
7,000	.....	.350	.068	.....	
8,000	.....	.408	.068	.015	E (2,000-8,000)=1,625,000 pounds per square inch.
9,000	.....	.458	.068	.....	
10,000	.....	.510	.062	.017	
11,000	.....	.562	.062	.....	
12,000	.....	.614	.062	.020	
13,000	.....	.668	.064	.....	
14,000	.....	.721	.063	.024	
15,000	.....	.769	.048	.....	
16,000	.....	.828	.059	.028	
16,500	6,460	.....	.....	.....	Ultimate strength.

Cross grained, split along the grain diagonally almost from end to end.

No. 735.

Marks, 40. (Second specimen.)

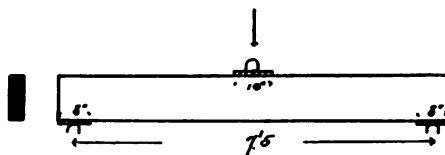
Length, 8.16 feet.

Breadth, 3".70.

Depth, 11".13.

Weight, 77 pounds. Weight per cubic foot, 33 pounds.

Rate of growth, 18 rings per inch.



Ends supported 7.5 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inch.	Inch.	Inch.	
1,000		0.	0.		Initial load.
2,000		.029	.029		
3,000		.067	.028		
4,000		.085	.028	.004	
5,000		.118	.028		
6,000		.140	.027		
7,000		.167	.027		
8,000		.195	.028	.007	
9,000		.223	.028		
10,000		.250	.027		
11,000		.276	.026		
12,000		.304	.028	.010	
13,000		.330	.026		
14,000		.358	.028		
15,000		.385	.027		
16,000		.414	.029	.016	Cracked. Ultimate strength.
26,800	7,890				

Split along the grain diagonally about three-fourths of the length of the beam.

No. 723.

Marks, 46.

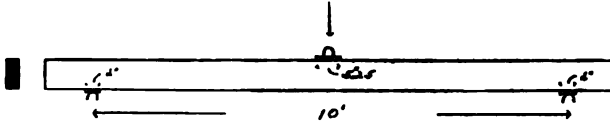
Length, 12 feet.

Breadth, 2".67.

Depth, 7".48.

Weight, 61 pounds. Weight per cubic foot, 36.67 pounds.

Rate of growth, 12 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.

Deflections measured at the middle.

Applied loads.		Deflections.	Successive deflections.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200	.....	0.	0.	.....	Initial load.
1,000	.....	.156	.156	.001	
2,000	.....	.347	.191	.003	
3,000	.....	.541	.194	.009	E (1,000-3,000)=2,061,000 pounds per square inch.
4,000	.....	.744	.203	.012	
5,000	.....	.989	.196	.015	
6,000	.....	1.139	.200	.....	
6,200	.....	1.176	.088	.....	
6,400	.....	1.217	.042	.....	
6,600	.....	1.257	.040	.....	
6,800	.....	1.300	.043	.....	
7,000	.....	1.343	.043	.....	
8,800	10,610	.....	.....	.....	Ultimate strength.

Fractured on the tension side and split along the grain toward one end.

No. 711.

Marks, 48. (First specimen.)

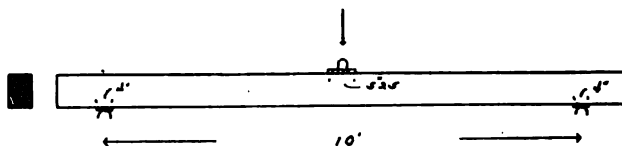
Length, 12 feet.

Breadth, 5".70.

Depth, 7".48.

Weight, 115 pounds. Weight per cubic foot, 32.37 pounds.

Rate of growth, 14 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.  E (2,000-8,000)=1,937,000 pounds per square inch.
1,000	.....	.048	.048	.....	
2,000	.....	.141	.098	.006	
3,000	.....	.235	.092	.....	
4,000	.....	.332	.099	.010	
5,000	.....	.428	.091	.....	
6,000	.....	.516	.093	.012	
7,000	.....	.612	.096	.....	
8,000	.....	.709	.097	.013	
9,000	.....	.804	.095	.....	
10,000	.....	.901	.097	.014	
11,000	.....	1.004	.103	.....	
12,000	.....	1.108	.104	.026	
13,000	.....	1.245	.137	.....	
18,900	10,670	.....	.....	.....	Ultimate strength.

Splintering fracture on the tension side, with crushing of the fibers at the ends of the middle shoe.

No. 733.

Marks, 48. (Second specimen.)

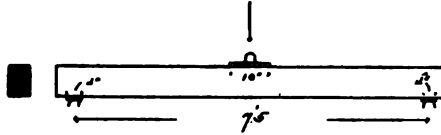
Length, 8.2 feet.

Breadth, 5".69.

Depth, 7".47.

Weight, 78 pounds. Weight per cubic foot, 32.23 pounds.

Rate of growth, 14 rings per inch.



Ends supported 7.5 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.023	.023	.....	
2,000	.....	.066	.043	.002	
3,000	.....	.109	.043	.....	
4,000	.....	.152	.043	.006	
5,000	.....	.191	.039	.....	
6,000	.....	.235	.044	.007	
7,000	.....	.276	.041	.....	
8,000	.....	.319	.043	.010	
9,000	.....	.360	.041	.....	
10,000	.....	.403	.043	.013	
11,000	.....	.446	.042	.....	
12,000	.....	.489	.044	.015	E (2,000-12,000) = 1,874,000 pounds per square inch.
13,000	.....	.531	.042	.....	
14,000	.....	.575	.044	.....	
27,100	11,520	.....	.....	.....	Ultimate strength.

Splintering fracture on the tension side. Fibers crushed at the middle bearing.



No. 709.

Marks, 52.

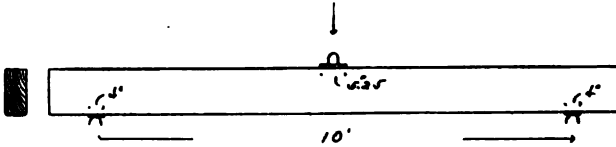
Length, 12.02 feet.

Breadth, 4".72.

Depth, 11".51.

Weight, 178 pounds. Weight per cubic foot, 39.25 pounds.

Rate of growth, 7 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflections.	Successive deflections.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inch.	Inch.	Inch.	
500		0.	0.		Initial load.
1,000		.017	.017		
2,000		.060	.033		
3,000		.061	.031		
4,000		.114	.033		
5,000		.145	.031		
6,000		.176	.031		
7,000		.206	.030		
8,000		.237	.031		
9,000		.268	.031		
10,000		.299	.031		
11,000		.330	.031		
12,000		.361	.031		E (2,000-12,000) = 1,980,000 pounds per square inch.
13,000		.392	.031		
14,000		.423	.031		
15,000		.454	.031		
16,000		.485	.031		
17,000		.516	.031		
18,000		.549	.033		
19,000		.579	.030		
20,000		.609	.030		
21,000		.641	.032		
22,000		.674	.033		
23,000		.707	.033		
24,000		.741	.034		
25,000		.775	.034		
26,000		.810	.035		
27,000		.854	.044		Cracked. Ultimate strength.
87,900	10,900				

Sheared along the grain nearly the whole length of the stick.  
Fibers crushed at middle bearing.

No. 721.

Marks, 59. (First specimen.)

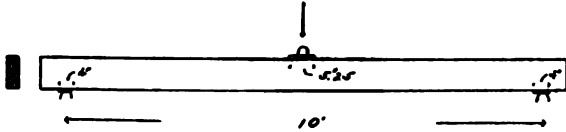
Length, 11.1 feet.

Breadth, 2".73.

Depth, 7".60.

Weight, 50 pounds. Weight per cubic foot, 31.22 pounds.

Rate of growth, 19 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200		0.	0.		Initial load.
400		.048	.048		
600		.089	.041		
800		.133	.044		
1,000		.176	.043	.002	
2,000		.389	.213	.007	
3,000		.607	.218	.013	E (1,000-3,000) = 1,717,000 pounds per square inch.
4,000		.880	.223	.016	
5,000		1.049	.219	.019	
5,200		1.096	.046		
5,400		1.143	.048		
5,600		1.190	.047		
5,800		1.236	.046		
6,000		1.286	.050		
8,800	10,060				Ultimate strength.

Split along the grain diagonally from middle of tension side to about 2 feet from one end. Fibers crushed in vicinity of middle bearing.

No. 722.

Marks, 59. (Second specimen.)

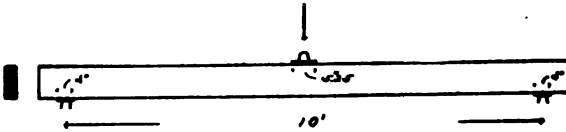
Length, 11.14 feet.

Breadth, 2".69.

Depth, 7".76.

Weight, 48 pounds. Weight per cubic foot, 29.71 pounds.

Rate of growth, 19 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inches.	Inch.	Inch.	
200	.....	0.	0.	.....	Initial load.  E (1,000-3,000)=1,588,000 pounds per square inch.
1,000	.....	.188	.188	.001	
2,000	.....	.404	.221	.002	
3,000	.....	.688	.229	.004	
4,000	.....	.865	.232	.007	
5,000	.....	1.106	.245	.....	
5,200	.....	1.159	.061	.....	
5,400	.....	1.211	.062	.....	
5,600	.....	1.263	.062	.....	
5,800	.....	1.331	.066	.....	
6,000	.....	1.388	.067	.....	Ultimate strength.
8,500	9,490	.....	.....	.....	

Splintering fracture on tension side. Fibers crushed in vicinity of middle bearing.

TABULATION OF TRANSVERSE TESTS OF DOUGLAS FIR WOOD.

No. of test.	Marks.	Weight per cubic foot.	Rings per inch.	Dimensions.			Modulus of—		Remarks.
				Breadth.	Depth.	Span.	Elasticity, per square inch.	Rupture, per square inch.	
		<i>Pounds.</i>		<i>Inches.</i>	<i>Inches.</i>	<i>Feet.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
717	7	32.33	12	7.59	7.58	10	1,825,000	11,470	First specimen.
734	7	35.72	12	7.37	7.44	7.5	1,943,000	12,110	Second specimen.
718	12	33.43	11	7.57	7.54	10	1,777,000	10,000	
707	13	34.35	9	5.50	13.40	10	1,285,000	7,470	
720	15	33.98	23	2.80	7.65	10	1,918,000	11,200	First specimen.
719	15	33.97	23	2.86	7.50	10	1,980,000	8,610	Second specimen.
712	22	35.74	12	4.53	4.51	10	2,306,000	9,570	Tested perpendicular to rings of growth.
713	22	35.63	12	4.49	4.50	10	2,218,000	8,910	Tested parallel to rings of growth.
708	28	33.74	14	5.52	13.35	10	1,436,000	8,780	
714	31	33.92	17	4.90	4.87	10	1,875,000	8,290	Tested perpendicular to rings of growth.
715	31	33.89	17	4.81	4.86	10	1,885,000	8,080	Tested parallel to rings of growth.
716	34	29.62	11	3.80	9.70	10	1,102,000	6,950	First specimen.
736	34	30.06	11	3.78	9.70	7.5	1,277,000	8,840	Second specimen.
710	40	36.04	18	3.70	11.15	10	1,625,000	6,460	First specimen.
735	40	33.00	18	3.70	11.13	7.5	1,342,000	7,890	Second specimen.
723	46	36.67	12	2.67	7.48	10	2,051,000	10,610	
711	48	32.37	14	5.70	7.48	10	1,937,000	10,670	First specimen.
733	48	32.23	14	5.69	7.47	7.5	1,874,000	11,520	Second specimen.
709	52	39.25	7	4.72	11.51	10	1,930,000	10,900	
721	59	31.22	19	2.73	7.60	10	1,717,000	10,050	First specimen.
722	59	29.71	19	2.69	7.76	10	1,538,000	9,490	Second specimen.

## WHITE OAK WOOD.

## DETAILS OF TRANSVERSE TESTS.

No. 724.

Marks, I.

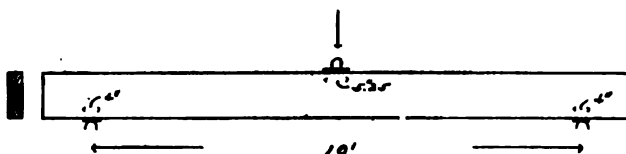
Length, 12 feet.

Breadth, 3".20.

Depth, 11".03.

Weight, 137 pounds. Weight per cubic foot, 46.60 pounds.

Rate of growth, 16 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500		0.	0.		Initial load.
1,000		.084	.084		
2,000		.096	.062	.008	
3,000		.160	.064		
4,000		.222	.062	.005	
5,000		.284	.062		
6,000		.345	.061	.008	
7,000		.409	.064		
8,000		.477	.068	.016	
9,000		.544	.067		
10,000		.612	.068	.027	E (2,000-10,000) = 1,686,000 pounds per square inch.
11,000		.686	.074		
12,000		.767	.081	.046	
13,000		.846	.079		
14,000		.988	.067		
15,000		1.082	.099		
23,800	11,010				Ultimate strength.

Fractured on the tension side and crushed fibers on the compression side under the middle shoe, where the wood was indented  $\frac{1}{8}$ ".

No. 725.

Marks, II.

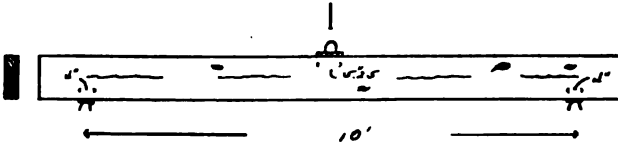
Length, 12.01 feet.

Breadth, 3".37.

Depth, 10".90.

Weight, 149 pounds. Weight per cubic foot, 48.64 pounds.

Rate of growth, 9 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflec- tion sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
Pounds.	Pounds.	Inch.	Inch.	Inch.	
500		0.	0.		Initial load.
1,000		.029	.029		
2,000		.087	.058	.002	
3,000		.136	.049		
4,000		.189	.053	.004	
5,000		.240	.051		
6,000		.298	.053	.006	
7,000		.346	.053		
8,000		.399	.053	.009	
9,000		.451	.052		
10,000		.506	.055	.011	
11,000		.558	.052		
12,000		.614	.056	.014	E (2,000-12,000) = 1,588,000 pounds per square inch.
13,000		.674	.060		
14,000		.735	.061	.023	
15,000		.790	.055		
16,000		.858	.063		Ultimate strength.
27,800	12,410				

Splintering fracture on tension side. Fibers crushed in the vicinity of the middle bearing.

No. 726.

Marks, III.

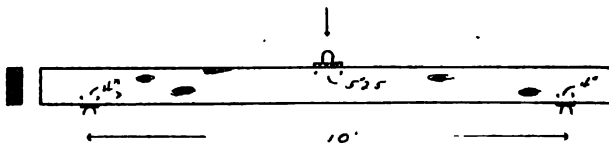
Length, 12.01 feet.

Breadth, 3".62.

Depth, 8".93.

Weight, 126 pounds. Weight per cubic foot, 46.73 pounds.

Rate of growth, 11 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.047	.047	.....	
2,000	.....	.137	.090	.001	
3,000	.....	.234	.097	.....	
4,000	.....	.326	.092	.004	
5,000	.....	.418	.092	.....	
6,000	.....	.512	.094	.006	
7,000	.....	.604	.092	.....	
8,000	.....	.696	.092	.011	E (2,000-8,000)—1,827,000 pounds per square inch.
9,000	.....	.795	.099	.....	
10,000	.....	.895	.100	.020	
11,000	.....	1.004	.109	.....	
12,000	.....	1.126	.122	.....	
13,000	.....	1.242	.116	.....	
19,700	12,280	.....	.....	.....	Ultimate strength.

Splintering fracture on tension side of beam. Slight crushing at middle bearing.

H. Doc. 335—35

No. 727.

Marks, IV.

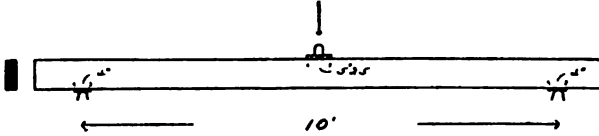
Length, 12 feet.

Breadth, 2".53.

Depth, 7".15.

Weight, 62 pounds. Weight per cubic foot, 41.15 pounds.

Rate of growth, 12 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
200		0.	0.		Initial load.
400		.065	.065		
600		.128	.068		
800		.190	.062		
1,000		.254	.064	.001	
2,000		.564	.310	.002	
3,000		.878	.314	.006	
4,000		1.236	.358		
4,200		1.311	.075		
4,400		1.389	.078		
4,600		1.464	.079		
4,800		1.548	.080		
5,000		1.655	.107		
8,300	11,550				Ultimate strength.

Fractured on the tension side, accompanied by shearing along the grain.



No. 728.

Marks, V.

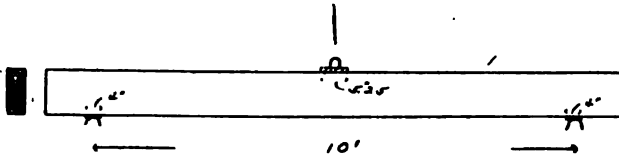
Length, 11.98 feet.

Breadth, 4" .59.

Depth, 11" .18.

Weight, 184 pounds. Weight per cubic foot, 43.08 pounds.

Rate of growth, 11 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.023	.023	.....	
2,000	.....	.074	.051	.001	
3,000	.....	.124	.050	.....	
4,000	.....	.173	.049	.002	
5,000	.....	.221	.048	.....	
6,000	.....	.272	.051	.005	
7,000	.....	.321	.049	.....	
8,000	.....	.370	.049	.006	
9,000	.....	.419	.049	.....	
10,000	.....	.469	.050	.008	
11,000	.....	.518	.049	.....	
12,000	.....	.568	.050	.012	E (2,000-12,000) = 1,394,000 pounds per square inch.
13,000	.....	.615	.047	.....	
14,000	.....	.665	.050	.014	
15,000	.....	.723	.058	.....	
16,000	.....	.783	.060	.025	
17,000	.....	.832	.049	.....	
18,000	.....	.891	.059	.....	
19,000	.....	.951	.060	.....	
20,000	.....	1.017	.066	.....	
82,200	10,110	.....	.....	.....	Ultimate strength.

Splintering fracture on the tension side.

No. 729.

Marks, VI.

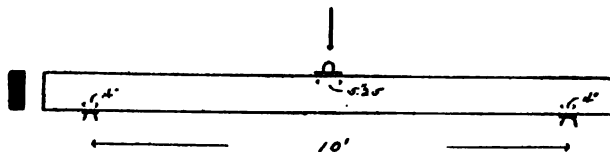
Length, 12 feet.

Breadth, 3".39.

Depth, 9".28.

Weight, 110 pounds. Weight per cubic foot, 41.97 pounds.

Rate of growth, 15 rings per inch.



Ends supported 10 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inches.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.061	.061	.....	
2,000	.....	.179	.118	.001	
3,000	.....	.299	.120	.....	
4,000	.....	.419	.120	.002	E (2,000-4,000)=1,384,000 pounds per square inch.
5,000	.....	.588	.119	.....	
6,000	.....	.658	.115	.004	
7,000	.....	.778	.120	.....	
8,000	.....	.901	.128	.010	
9,000	.....	1.042	.141	.....	
10,000	.....	.....	.....	.....	
14,800	9,010	.....	.....	.....	Ultimate strength.

Splintering fracture on the tension side.

No. 730.

Marks, VII.

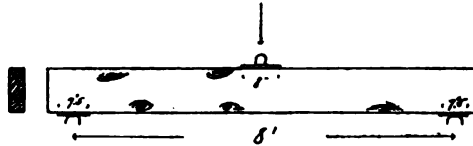
Length, 9.01 feet.

Breadth, 3".40.

Depth, 11".01.

Weight, 108 pounds. Weight per cubic foot, 46.12 pounds.

Rate of growth, 8 grains per inch.



Ends supported 8 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	Initial load.  E (2,000-10,000) = 1,140,000 pounds per square inch.
500	.....	0.	0.	.....	
1,000	.....	.024	.024	.....	
2,000	.....	.068	.044	.001	
3,000	.....	.112	.044	.....	
4,000	.....	.154	.042	.003	
5,000	.....	.199	.045	.....	
6,000	.....	.244	.045	.006	
7,000	.....	.290	.046	.....	
8,000	.....	.335	.045	.009	
9,000	.....	.379	.044	.....	
10,000	.....	.424	.045	.015	
11,000	.....	.470	.046	.....	
12,000	.....	.517	.047	.020	
13,000	.....	.567	.050	.....	
14,000	.....	.617	.050	.....	
23,400	8,180	.....	.....	.....	Ultimate strength.

Tension fracture, starting at a knot.

No. 731.

Marks, VIII.

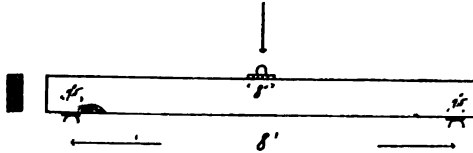
Length, 9 feet.

Breadth, 3".46.

Depth, 9".10.

Weight, 99 pounds. Weight per cubic foot, 50.31 pounds.

Rate of growth, 15 rings per inch.



Ends supported 8 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflections.	Successive deflections.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	-----	0.	0.	-----	Initial load.
1,000	-----	.028	.028	-----	
2,000	-----	.063	.055	.008	
3,000	-----	.136	.053	-----	
4,000	-----	.192	.056	.008	
5,000	-----	.246	.054	-----	
6,000	-----	.301	.055	.010	
7,000	-----	.355	.054	-----	
8,000	-----	.409	.054	.013	
9,000	-----	.463	.054	-----	
10,000	-----	.520	.057	.018	
11,000	-----	.578	.058	-----	
12,000	-----	.636	.058	.026	E (2,000-12,000)=1,604,000 pounds per square inch.
13,000	-----	.696	.060	-----	
14,000	-----	.757	.061	-----	
30,300	15,230	-----	-----	-----	Ultimate strength.

Fractured on the tension side, accompanied by shearing along the grain.

No. 732.

Marks, IX.

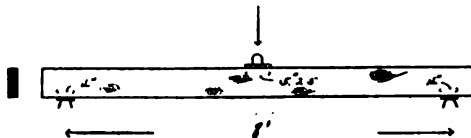
Length, 9 feet.

Breadth, 2".39.

Depth, 6".97.

Weight, 53.5 pounds. Weight per cubic foot, 51.39 pounds.

Rate of growth, 15 rings per inch.



Ends supported 8 feet apart. Loaded at the middle.  
Deflections measured at the middle.

Applied loads.		Deflec- tions.	Successive deflec- tions.	Deflection sets.	Remarks.
Total.	Maximum fiber stress per square inch.				
<i>Pounds.</i>	<i>Pounds.</i>	<i>Inch.</i>	<i>Inch.</i>	<i>Inch.</i>	
500	.....	0.	0.	.....	Initial load.
1,000	.....	.077	.077	.....	
2,000	.....	.228	.151	.007	
3,000	.....	.386	.158	.....	
4,000	.....	.549	.168	.017	E (2,000-4,000)—1,758,000 pounds per square inch.
5,000	.....	.723	.174	.....	
6,000	.....	.927	.204	.....	
9,500	11,780	.....	.....	.....	Ultimate strength.

Fractured on the tension side. Fibers crushed near middle bearing.


TABULATION OF TRANSVERSE TESTS OF WHITE-OAK WOOD.

No. of test.	Marks.	Weight per cubic foot.	Rings per inch.	Dimensions.			Modulus of—	
				Breadth.	Depth.	Span.	Elasticity, per square inch.	Rupture, per square inch.
		<i>Pounds.</i>		<i>Inches.</i>	<i>Inches.</i>	<i>Feet.</i>	<i>Pounds.</i>	<i>Pounds.</i>
724	I	46.60	16	3.20	11.03	10	1,636,000	11,010
725	II	48.64	9	3.37	10.90	10	1,538,000	12,410
726	III	46.73	11	3.62	8.93	10	1,827,000	12,280
727	IV	41.15	12	2.53	7.15	10	1,497,000	11,550
728	V	43.08	11	4.59	11.18	10	1,394,000	10,110
729	VI	41.97	15	3.39	9.28	10	1,334,000	9,010
730	VII	46.12	8	3.40	11.01	8	1,140,000	8,180
731	VIII	50.31	15	3.46	9.10	8	1,604,000	15,230
732	IX	51.39	15	2.39	6.97	8	1,758,000	11,780

DOUGLAS FIR WOOD.

SHEARING TESTS.

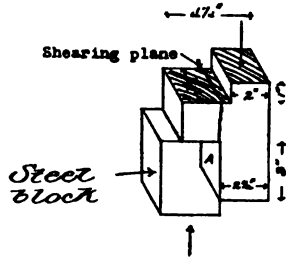*Specimen with one shearing plane.*



Face A lubricated.

Specimens with the same shearing area were taken from the same stick of timber and numbered 1, 2, 3, and 4 across the stick, and were side by side in the timber.


Rings of growth about 45° with shearing plane.

No.	Dimensions of shearing plane.		Area of shearing plane.	Shearing strength.			Remarks.
				Total.	Per square inch.	Mean.	
	Inches.	Inches.	Sq. inches.	Pounds.	Pounds.	Pounds.	
1	2.05	2.04	4.18	1,750	419		
2	2.06	2.04	4.20	2,000	476	.....	
3	2.04	2.04	4.16	1,700	408	.....	
4	2.06	2.05	4.22	1,970	467	443	
1	2.04	3.00	6.12	3,220	526	.....	
2	2.04	3.00	6.12	3,250	531	.....	
3	2.03	3.00	6.09	3,100	509	.....	
4	2.03	3.00	6.09	3,280	539	621	
1	2.04	4.00	8.16	3,980	488	.....	
2	2.04	4.00	8.16	3,820	468	.....	
3	2.04	4.00	8.16	3,910	479	.....	
4	2.03	4.00	8.12	4,190	516	488	
1	2.04	4.98	10.16	6,400	630	.....	
2	2.06	4.98	10.26	5,100	497	.....	
3	2.03	4.99	10.13	5,500	543	.....	
4	2.03	5.00	10.15	4,700	463	533	
1	2.00	8.33	16.66	8,100	486	.....	
2	2.04	6.00	12.24	5,800	474	.....	
3	2.04	6.00	12.24	6,000	490	.....	
4	2.04	6.00	12.24	5,720	476	479	

Rings of growth perpendicular to shearing plane.  
Specimens marked No. 1 were nearer the heart of the tree than those marked No. 2.

No.	Dimensions of shearing plane.		Area of shearing plane.	Shearing strength.			Remarks.
				Total.	Per square inch.	Mean.	
	<i>Inches.</i>	<i>Inches.</i>	<i>Sq. inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
1	2.00	4.00	8.00	3,500	438	.....	
2	2.00	4.00	8.00	4,300	538	488	
1	2.00	4.10	8.20	3,600	489	.....	
2	2.00	4.10	8.20	4,600	561	500	

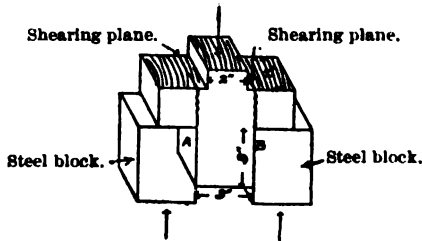*Specimens with two shearing planes.*




Faces A and B lubricated.

Rings of growth nearly parallel to planes of shearing.  
Specimens 1 and 2 were side by side in the timber.

No.	Dimensions of shearing plane.		Area of two planes.	Shearing strength.			Remarks.
				Total.	Per square inch.	Mean.	
	<i>Inches.</i>	<i>Inches.</i>	<i>Sq. inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
1	1.99	2.01	8.00	2,800	350	.....	
2	2.01	2.01	8.08	3,000	371	361	
1	2.00	3.00	12.00	4,700	392	.....	
2	2.01	3.00	12.06	4,600	381	387	
1	3.99	2.00	15.96	5,850	367	.....	
2	3.99	2.00	15.96	4,900	307	337	Followed rings closely.
1	2.00	5.00	20.00	5,950	296	.....	
2	2.01	5.00	20.10	6,300	313	306	
1	2.00	6.02	24.08	7,580	315	.....	
2	2.01	6.04	24.28	10,100	416	366	Both sides yielded at once.

## SHEARING TESTS OF DOUGLAS FIR WOOD WITH OBLIQUE LOADS.

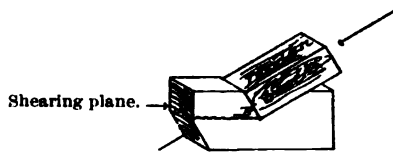

No.	Dimensions of shearing plane.		Area of shearing plane.	Direction of shearing plane to rings of growth.	Pressure applied at angle with shearing plane of.	Yielded along line.	Shearing strength.	
	Inches.	Inches.					Total.	Per square inch.
1	3.75	11.00	41.25	45 degrees.....	30	A-B .....	<i>Pounds.</i> 58,900	<i>Pounds.</i> 1,430
2	3.75	8.00	30.00	Parallel.....	45	A-B .....	39,000	1,300
3	4.68	7.90	36.97	Perpendicular .....	45	See note .	39,200	1,060
4	4.72	12.95	61.12	.....do.....	30	A-B .....	73,900	1,209
5	4.72	22.50	106.20	.....do.....	15	A-B .....	75,600	712
6	2.75	7.40	20.36	Nearly perpendicular.	45	A-B .....	26,400	1,297
7	2.75	10.00	27.50	.....do.....	30	A-B .....	35,400	1,287
8	2.75	17.84	49.06	.....do.....	15	A-B .....	42,800	872

Note.—No. 3 sheared on area  $4''.68 \times 10''.30 = 48.20$  square inches.  
Nos. 3, 4, and 5 were all from the same piece of timber.



*Heat conductivity of sticks of Douglas fir wood, charred over open wood fires, and stick exposed to low temperature.*

## Test No. 3.

Wood fire used. Dimensions of stick, 10"×10"×4'. A hole 1" in diameter was bored to a depth of 2 feet in one end of this stick. Observations of the temperature at the middle of the stick taken with a mercury thermometer with its bulb at the bottom of the 1-inch hole. Stick turned over the fire, so as to burn all sides evenly.

Time.	Temperature.	Remarks.
<i>Hrs. min.</i>	<i>° C.</i>	
0 0	18	Put on fire.
0 30	17	
0 45	16	Pitch oozed out to a depth of 1" below sides, at end of stick.
1 00	17	
1 30	20	
1 35	22	
1 40	22.5	Pitch oozed out to a depth of 2" below sides, at end of stick.
1 50	27	
1 55	29	
2 00	30	
2 05	32	
2 10	35	Pitch oozed out to a depth of 4" below sides, at end of stick.
2 15	39	
2 20	44	
2 25	45	
2 30	51	Taken off fire and quenched with water.
2 35	56	
2 40	59	
2 45	60	
2 50	64	
2 55	70	
3 00	78	Does not feel warm to hand on outside.
3 05	78	
3 10	82	
3 15	86	
3 20	89	
3 25	92	
3 35	96	
3 40	96	
3 45	100	
3 50	102	Maximum temperature, 1 hour 20 minutes after taking from fire.
3 55	98	
4 00	96	

Test discontinued.

Dimensions after charcoal had been scraped off, 6".3×6".2, with rounded corners.

## Test No. 4.

Observations taken as in No. 3.  
 Temperature of fire, 750° C.  
 Dimensions of stick, 10" × 10" × 4'.

Time.		Temperature.	Remarks.	
<i>Hrs. Min.</i>		°C.		
0	0	18	Put on fire	
	15	17.5		
	30	18		
	45	18		
1	00	20		
1	15	22		
1	30	27		
1	45	30		
2	00	40		Quenched with water and returned to fire.
2	15	48		Do.
2	30	60	Do.	
2	45	68	Do.	
3	00	68	Taken from fire and quenched with water.	
3	30	78		
4	00	82		
4	30	82		
5	00	80		

Test discontinued.

Dimensions after charcoal was scraped off, 7".4 × 7".2 at one end and 6".5 × 6".5 at the other, with rounded corners.

## Test No. 5.

Observations taken as in No. 3.  
 Dimensions of stick, 10" × 10" × 3'.

Time.		Temperature.	Remarks.
<i>Hrs. Min.</i>		°C.	
0	0	18	Put on fire.
	15	18	
	30	18	
	45	20	
1	00	20	
1	15	20.5	
1	30	25	
1	45	31	
2	00	37	
2	15	44	
2	30	54	
2	45	61	
3	00	69	
3	15	78	

Test discontinued.

Dimensions after charcoal was scraped off, 6".7 × 6".9.

## Test No. 6.

Observations taken as in No. 3.

Dimensions of stick, 10" × 10" × 4'.

Time.		Temperature.	Remarks.
<i>Hrs. Min.</i>	<i>°C.</i>		
0 0	16	Put on fire.	
0 15	15.5		
0 30	16		
0 45	16		
1 00	16		
1 15	18		
1 30	21		
1 45	26		
2 00	26		
2 15	43		
2 30	52		
2 45	66		
3 00	82		
3 15	89		
3 30	96		
3 45	103		
4 00	104		
4 15	104		
4 30	106		
4 45	106		
5 00	105.5		
5 15	106		
5 30	106		
5 45	106		
6 00	107		
6 30	106		
7 00	104		

Test discontinued.

Dimensions after charcoal was scraped off, 6" × 6".4, with rounded corners.

## Test No. 7.

Observations taken as in No. 3.

Dimensions of stick, 10"×10"×4', with 2" hole at one end.

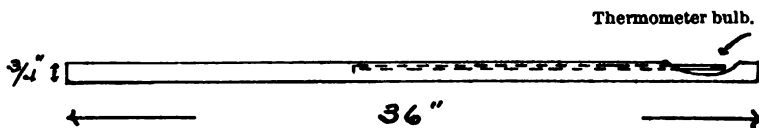
Time.	Temperature.	Remarks.	
<i>Hrs. Min.</i>	<i>°C.</i>		
0 0	19	Put on fire.	
0 15	19		
0 30	20		
0 45	20		
1 00	20.5		
1 15	21		
1 30	24		
1 45	27		
2 00	32		
2 15	40		
2 30	48		Taken from fire and smothered with sand and ashes.
2 45	60		
3 00	71		
3 15	90		
3 30	96		
4 00	106		
4 30	107		
4 45	109		
5 00	107		
5 15	107		
5 30	105		
5 45	104		
6 00	101		
6 15	99		
6 30	96		
6 45	95		
7 00	92		
7 15	89		
7 30	86		
7 45	84		
8 00	82		
8 15	79		
8 30	77	Temperature of 17° C. on outside.	
24 00	24		

Dimensions after charcoal had been scraped off, 6".3×5".9, with rounded corners. Fire burned down 1" deeper in two places than these dimensions show.

## TEST No. 8.

Dimensions of stick, 10"×10"×4', with a 1" hole 2 feet long bored in one end.

Observations taken with mercury thermometer with bulb not in immediate contact with the wood, as in former tests.



Time.	Temperature.	Remarks.
<i>Hrs. Min.</i>	<i>°C.</i>	
0 0	18.5	Temperature before putting on fire.
0 15	18.5	Put on fire.
0 30	18.5	
0 45	19	
1 00	20	Taken from fire and smothered.
1 15	22	
1 30	25	
1 45	27	
2 00	30	Put on fire second time.
2 15	38	
2 30	43	
2 45	46	
3 00	48	Taken from fire and smothered.
3 15	52	
3 30	57	
3 45	64	
4 00	70	Put on fire third time.
4 15	78	
4 30	81	
4 45	85	
5 00	88	Taken from fire and smothered.
5 15	97	
5 30	102	
5 45	103	
6 00	105	
6 15	105	
6 30	105	
6 45	104	
7 00	104	
7 15	103	
7 30	103	
7 45	101	
8 00	99	
8 15	98	
8 30	97	

Test discontinued.

## DOUGLAS FIR IN COLD STORAGE.

Size of stick, 10" × 10" × 4', with 1" hole 2 feet long in one end.  
Taken from temperature of 60° F. and placed in cold storage.

Time.	Date.	Temperature of stick.	Temperature of room.	Time in cold storage.	Remarks.
	1902.	°F.	°F.	Hours.	
8.45 a. m. . . . .	May 8	60	-1	0	
10.45 a. m. . . . .	do	60	-1	2	
12.00 m. . . . .	do	55	0	3.25	
2.45 p. m. . . . .	do	41	-1	6	
4.45 p. m. . . . .	do	32.5	-1	8	
8.45 a. m. . . . .	May 9	4	-1.5	24	
4.45 p. m. . . . .	do	2	-2.5	32	Then taken out and hole corked.

Stick taken from cold storage at a temperature of zero F. at 12 m.,  
May 14, 1902.

Time.	Date.	Temperature of stick.	Temperature of room.	Time in air at 68° F.	Remarks.
	1902.	°F.	°F.	Hours.	
2.00 p. m. . . . .	May 14		68	2	
3.00 p. m. . . . .	do	12.7	68	3	
4.00 p. m. . . . .	do	18.5	68	4	
8.00 a. m. . . . .	May 15	62.6	68	20	
11.00 a. m. . . . .	do	64.4	68	23	
4.00 p. m. . . . .	do	66.2	68	28	

COMPRESSION TESTS OF DOUGLAS FIR POSTS TURNED DOWN FROM  
10" × 10" STICKS WHICH HAD BEEN CHARRED OVER A WOOD FIRE.

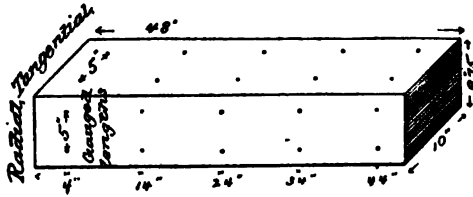
Posts had a 1" hole in the center, which was bored in order to take  
the temperature while the stick was charring. The area of this hole  
is deducted in computing sectional area.

Marks on posts.	Length.	Diameter.	Sectional area.	Ultimate strength.	
				Total.	Per square inch.
	<i>Inches.</i>	<i>Inches.</i>	<i>Square inches.</i>	<i>Pounds.</i>	<i>Pounds.</i>
3	24	4.97	18.61	183,500	7,170
4	24	5.82	25.82	183,200	7,100
5	18	5.40	22.12	148,200	6,700
6	24	4.54	15.40	117,100	7,600
7	24	4.40	14.42	85,900	5,960

## DOUGLAS FIR WOOD.

Expansion crosswise the grain, and absorption of water after submersion different periods.

Original state of wood, air seasoned 8 years.



Gauged lengths, 5" long each, established along the length of the stick 10" apart, beginning 4" from one end.

Weight of stick before submerged, 90.75 pounds.

Gauged lengths.	Weights, pounds, after periods submerged.						
	91.50	93.25	96.50	98.00	101.00	108.75	111.75
	Expansion after periods submerged of—						
	5 hours.	2 days.	5 days.	2 weeks.	4 weeks.	2 months.	3 months.
Tangential, 4.....	<i>Inch.</i> .0066	<i>Inch.</i> .0286	<i>Inch.</i> .0529	<i>Inch.</i> .1010	<i>Inch.</i> .1857	<i>Inch.</i> .1745	<i>Inch.</i> .1888
Tangential, 14.....	-.0008	.0103	.0253	.0620	.0909	.1292	.1457
Tangential, 24.....	.0067	.0236	.0414	.0787	.1069	.1430	.1592
Tangential, 34.....	-.0006	.0152	.0337	.0772	.1085	.1479	.1652
Tangential, 44.....	.0062	.0338	.0623	.1263	.1637	.2033	.2192
Radial, 4.....	.0045	.0114	.0200	.0429	.0633	.0892	.0985
Radial, 14.....	.0008	.0025	.0063	.0217	.0363	.0576	.0683
Radial, 24.....	.0011	.0044	.0071	.0204	.0326	.0533	.0631
Radial, 34.....	.0015	.0050	.0088	.0271	.0433	.0651	.0741
Radial, 44.....	.0029	.0126	.0220	.0509	.0727	.1000	.1086





1  
° stacks of  
ent to an  
at 750° C.

Temperature, degrees Centigrade.

1

8

No. 7.

6


4

2

air.

9

sand and ashes.



2

tick of  
or a wood

Temperature, degrees Centigrade.

No. 8.

9

air by dotted lines.  
the fire.



3

Diagram,  
of acts of  
subn  
Gauges  
of the

On gauged lengths.  
Comparison, inches.

3 months  
200 9 weeks  
4 weeks  
2 weeks  
100  
5 days  
25 days  
0 5 hours

Periods submerged.

100 5 m.  
2 m.  
4 w.  
2 w.  
0 5 d.  
2 d.  
5 h.  
0 4 48



---

---


**ADHESION OF LAG SCREWS AND BOLTS IN WOOD.**

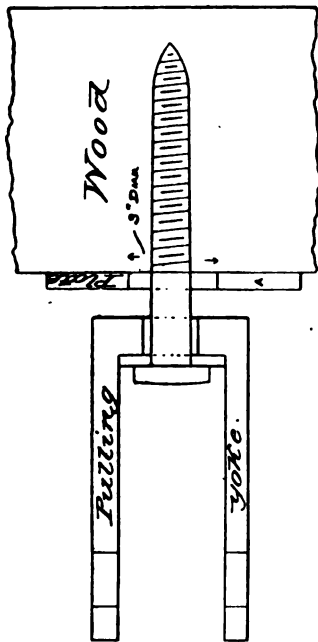---

---







TESTS OF THE ADHESION OF LAG SCREWS IN DOUGLAS FIR AND WHITE OAK WOOD.

Screws turned into the wood to the depth of their threaded portions.  
 Plate A used to prevent splintering of the wood.  
 Holes were bored in the wood to receive the screws.

Nominal size.		Dimensions.				Resisting area.	Kind of wood.	Diameter of bored hole.	Load at 1/10 pull. Total.	Load at 1/10 pull. Total.	Load at 1/10 pull. Total.	Adhesive resistance.		Remarks.
Diam-eter.	Length.	Diameters.		Length of thread.	Threads per inch.							Total.	Per square inch.	
Inch.	Inches	Inch.	Inch.	Inches.		Sq. inches.	Inch.	Pounds.	Pounds.	Pounds.	Pounds.	Total.	Per square inch.	
4	4	.62	.46	2	5	3.90	Douglas Fir	5/8	1,100	1,100	1,100	2,700	892	Wood split. Plate A not used.
4	4	.62	.46	2	5	3.90	do.	5/8	2,400	1,200	1,200	2,400	615	
4	4	.62	.46	2	5	3.90	do.	5/8	2,800	1,600	1,200	2,600	641	
6	6	.73	.56	3.20	4.5	7.84	do.	3/4	5,100	4,200	1,200	5,900	904	
6	6	.73	.56	3.20	4.5	7.84	do.	3/4	5,100	2,600	2,600	5,710	778	
6	6	.73	.56	3.20	4.5	7.84	do.	3/4	5,100	4,000	1,000	6,000	899	
6	6	.73	.56	3.20	4.5	7.84	do.	3/4	5,600	3,600	1,100	6,100	881	
6	6	.73	.56	3.20	4.5	7.84	do.	3/4	5,200	3,800	1,500	6,500	866	
8	8	.73	.59	4.50	4.5	10.82	do.	3/4	7,600	5,200	1,100	7,900	766	
8	8	.73	.59	4.50	4.5	10.82	do.	3/4	7,000	5,400	1,400	7,700	746	
8	8	.73	.59	4.50	4.5	10.82	do.	3/4	9,800	6,600	1,900	9,800	960	
8	8	.80	.66	4.90	4	13.70	do.	3/4	12,100	10,500	5,000	12,200	891	
8	8	.80	.66	4.90	4	13.70	do.	3/4	12,100	9,900	3,700	12,400	904	
8	8	.80	.66	4.90	4	13.70	do.	3/4	11,100	8,500	3,700	12,400	904	

TESTS OF THE ADHESION OF LAG SCREWS IN DOUGLAS FIR AND WHITE OAK WOOD—Continued.

Nominal size.		Dimensions.				Resisting area.	Kind of wood.	Diameter of bored hole.	Load at $\frac{1}{4}$ pull. Total.	Load at $\frac{1}{2}$ pull. Total.	Load at $\frac{3}{4}$ pull. Total.	Adhesive resistance.		Remarks.
Diameter.	Length.	Diameters.		Length of thread.	Threads per inch.							Total.	Per square inch.	
Inch.	Inches.	Inch.	Inch.	Inches.	Inches.	Sq. inches.	White Oak	Inch.	Pounds.	Pounds.	Pounds.	Pounds.	Pounds.	
$\frac{1}{8}$	3	.48	.29	1.50	6	2.26	White Oak	$\frac{1}{8}$	1,500	200	3,700	1,640	Plate A not used.	
$\frac{1}{8}$	3	.48	.29	1.50	6	2.26	do	$\frac{1}{8}$	1,500	200	3,600	1,590	Do.	
$\frac{1}{8}$	3	.48	.29	1.50	6	2.26	do	$\frac{1}{8}$	1,100	300	3,500	1,550	Do.	
$\frac{1}{8}$	3	.41	.34	1.50	6	1.93	do	$\frac{1}{8}$	1,200	100	3,400	1,780	Do.	
$\frac{1}{8}$	3	.41	.34	1.50	6	1.93	do	$\frac{1}{8}$	3,600	800	3,600	1,870	Do.	
$\frac{1}{8}$	3 $\frac{1}{2}$	.60	.47	2	5	3.77	do	$\frac{1}{8}$	3,500	400	6,800	1,800	Do.	
$\frac{1}{8}$	3 $\frac{1}{2}$	.60	.47	2	5	3.77	do	$\frac{1}{8}$	3,900	800	7,200	1,910	Do.	
$\frac{1}{8}$	4	.62	.46	2.25	5	4.38	do	$\frac{1}{8}$	5,100	600	7,000	1,600	Do.	
$\frac{1}{8}$	4	.62	.46	2.25	5	4.38	do	$\frac{1}{8}$	4,800	400	6,600	1,510	Do.	
$\frac{1}{8}$	6	.73	.56	3.20	4.5	7.34	do	$\frac{1}{8}$	7,100	2,100	12,200	1,660		
$\frac{1}{8}$	6	.73	.56	3.20	4.5	7.34	do	$\frac{1}{8}$	8,600	2,100	12,800	1,770		
$\frac{1}{8}$	6	.73	.56	3.20	4.5	7.34	do	$\frac{1}{8}$	6,600	400	13,000	1,770	Lag screw broke. T. S. = 52,850 Pounds per square inch at root of thread.	
$\frac{1}{8}$	8	.73	.59	4.5	4.5	10.32	do	$\frac{1}{8}$	6,000	1,800	15,100	1,480		
$\frac{1}{8}$	8	.73	.59	4.5	4.5	10.32	do	$\frac{1}{8}$	9,500	2,000	14,800	1,380		
$\frac{1}{8}$	8	.73	.59	4.5	4.5	10.32	do	$\frac{1}{8}$	6,000	1,800	13,800	1,280		
$\frac{1}{8}$	9	.89	.66	4.90	4	13.70	do	$\frac{1}{8}$	6,400	1,800	17,800	1,300	Screw was oiled on account of rust.	
$\frac{1}{8}$	9	.89	.66	4.90	4	13.70	do	$\frac{1}{8}$	6,400	1,800	17,800	1,300	Twisted off when turned into wood.	

Thread No. 1.  
Wood screw thread.



Thread No. 2.  
Ratchet thread.

In column "Length of thread" is given the length of the full-size thread which was turned into the wood.

TESTS OF 1/2" LAG SCREWS IN DOUGLAS FIR.

Length of screw.	Description of screw.						Adhesive resistance.		Remarks.	
	Diameters.		Length of thread.	Threads per inch.	Kind of thread.	Resisting area.	Diameter of bored hole.	Load at 1/4" pull. Total.		Load at 1/2" pull. Total.
	Body.	Root of thread.								
Inches.	Inch.	Inch.	Inches.			Sq. inches.	Inch.	Pounds.	Pounds.	
4	.49	.37	2.3	5	No. 1.	3.54	1/4"	2,800	781	
4	.49	.37	2.8	5	No. 1.	3.54	1/4"	2,500	708	
4	.49	.37	2.3	6	No. 1.	3.54	1/4"	2,900	819	
4 1/2	.49	.37	2.8	5	No. 1.	4.31	1/4"	3,500	812	
4 1/2	.49	.37	2.8	5	No. 1.	4.31	1/4"	3,800	882	
4 1/2	.49	.37	2.8	5	No. 1.	4.31	1/4"	400	786	
5	.48	.37	2.9	5	No. 1.	4.37	1/4"	3,400	778	
5	.48	.37	2.9	5	No. 1.	4.37	1/4"	3,700	847	
5	.48	.37	2.9	5	No. 1.	4.37	1/4"	3,300	735	
5 1/2	.46	.37	2.9	6	No. 2.	4.19	1/4"	400	835	
5 1/2	.46	.37	2.9	6	No. 2.	4.19	1/4"	3,000	883	
5 1/2	.46	.37	2.9	6	No. 2.	4.19	1/4"	400	907	
6	.48	.37	3	6 1/2	No. 2.	4.52	1/4"	3,600	885	
6	.48	.37	3	6 1/2	No. 2.	4.52	1/4"	4,100	907	
6	.48	.37	3	6 1/2	No. 2.	4.52	1/4"	4,500	996	
7	.49	.37	3	5	No. 1.	4.62	1/4"	3,500	844	
7	.49	.37	3	5	No. 1.	4.62	1/4"	3,200	866	
7	.49	.37	3	5	No. 1.	4.62	1/4"	4,600	888	

TESTS OF 1/2" LAG SCREWS IN DOUGLAS FIR—Continued.

Length of screw. Inches.	Description of screw.					Load at 1/4" pull. Total.	Load at 1/2" pull. Total.	Load at 3/4" pull. Total.	Adhesive resistance.		Remarks.		
	Diameters.		Length of thread.	Threads per inch.	Kind of thread.				Resisting area.	Diameter of bored hole.		Total.	Per square inch.
	Inch.	Inch.											
6 1/4	.48	.38	3.5	6 1/4	No. 2.	5.28	1 1/4	600	4,700	880	This lag screw was screwed into the narrow side of a block 9" x 11" x 19". When tested the wood split 2" either side of the screw. Tested without plate A.		
6 1/4	.48	.38	3.5	6 1/4	No. 2.	5.28	1 1/4	700	4,900	928			
6 1/4	.48	.38	3.5	6 1/4	No. 2.	5.28	1 1/4	700	5,100	966			
8	.48	.37	3.5	5	No. 1.	5.28	1 1/4	600	4,900	928			
8	.48	.37	3.5	5	No. 1.	5.28	1 1/4	800	5,400	1,020			
8	.48	.37	3.5	5	No. 1.	5.28	1 1/4	700	5,100	966			
8	.48	.37	3.5	5	No. 1.	5.28	1 1/4	700	6,200	1,170			
8	.48	.37	3.5	5	No. 1.	5.28	1 1/4	700	6,200	1,170			

TESTS OF 1/2" LAG SCREWS IN DOUGLAS FIR.

3 1/4	.62	.47	2	5	No. 2.	3.90	1 1/4	2,100	1,500	300	2,500	641
3 1/4	.62	.47	2	5	No. 2.	3.90	1 1/4	2,200	1,400	400	2,500	641
3 1/4	.62	.47	2	5	No. 2.	3.90	1 1/4	2,100	1,300	200	2,800	718
4	.61	.48	2.2	5	No. 2.	4.22	1 1/4	1,700	800	100	2,500	592
4	.61	.48	2.2	5	No. 2.	4.22	1 1/4	1,900	1,300	500	2,600	592
4	.61	.48	2.2	5	No. 2.	4.22	1 1/4	2,800	1,200	200	2,900	687
4 1/4	.62	.50	2.4	5	No. 2.	4.67	1 1/4	2,100	700	100	2,800	498
4 1/4	.62	.50	2.4	5	No. 2.	4.67	1 1/4	2,000	1,100	200	2,400	514
4 1/4	.62	.50	2.4	5	No. 2.	4.67	1 1/4	1,900	1,500	300	2,300	498
5	.61	.48	3	5	No. 1.	5.76	1 1/4	3,100	1,700	400	3,200	556
5	.61	.48	3	5	No. 1.	5.76	1 1/4	2,800	1,800	500	3,800	574
5	.61	.48	3	5	No. 1.	5.76	1 1/4	3,100	1,700	500	3,800	574
5 1/4	.60	.46	3	5	No. 2.	5.66	1 1/4	2,500	1,200	300	2,800	495
5 1/4	.60	.46	3	5	No. 2.	5.66	1 1/4	2,600	1,700	300	2,900	512
5 1/4	.60	.46	3	5	No. 2.	5.66	1 1/4	2,600	1,700	300	3,100	545

6	.60	.47	3.5	5 No. 1..	6.60	$\frac{1}{8}$	5,100	1,900	600	5,100	773
6	.60	.47	3.5	5 No. 1..	6.60	$\frac{7}{16}$	4,900	2,300	800	5,400	818
6	.60	.47	3.5	5 No. 1..	6.60	$\frac{1}{2}$	4,700	2,200	500	5,500	833
7	.61	.48	3.9	5 No. 1..	7.47	$\frac{1}{2}$	5,700	4,400	.....	5,800	776
7	.61	.48	3.9	5 No. 1..	7.47	$\frac{7}{16}$	5,500	3,200	800	5,800	776
7	.61	.48	3.9	5 No. 1..	7.47	$\frac{1}{2}$	6,000	4,300	700	6,300	843
8	.62	.47	4.1	5 No. 1..	7.99	$\frac{1}{2}$	6,200	2,800	600	6,400	801
8	.62	.47	4.1	5 No. 1..	7.99	$\frac{7}{16}$	5,900	4,300	1,100	6,200	776
8	.62	.47	4.1	5 No. 1..	7.99	$\frac{1}{2}$	5,400	3,700	1,000	6,800	851
10	.62	.49	5.1	5 No. 1..	9.93	$\frac{1}{2}$	5,900	2,400	700	6,400	645
10	.62	.49	5.1	5 No. 1..	9.93	$\frac{7}{16}$	6,000	4,600	1,000	6,300	684
10	.62	.49	5.1	5 No. 1..	9.93	$\frac{1}{2}$	6,300	4,400	1,000	6,300	684
12	.62	.48	5.4	5 No. 1..	10.62	$\frac{1}{2}$	6,500	4,600	900	6,800	646
12	.62	.48	5.4	5 No. 1..	10.62	$\frac{7}{16}$	6,400	4,600	700	6,400	699
12	.62	.48	5.4	5 No. 1..	10.62	$\frac{1}{2}$	6,800	4,400	1,000	6,900	656
8	.62	.47	4.1	5 No. 1..	7.99	$\frac{7}{16}$	5,800	3,000	1,400	6,500	814

This lag screw was screwed into the narrow side of a block 3" x 1 1/2" x 11". When tested the wood split 4" on either side of the screw. Tested without plate A.

TESTS OF 3/4" LAG SCREWS IN DOUGLAS FIR.

Length of screw.	Description of screw.						Load at 1/2" pull. Total.	Load at 3/4" pull. Total.	Load at 1" pull. Total.	Adhesive resistance.		Remarks.	
	Diameters.		Length of thread.	Threads per inch.	Kind of thread.	Resisting area.				Diameter of bored hole.	Total.		Per square inch.
	Body.	Root of thread.											
5	.75	.57	2.5	4.5	No. 1	6.89	3/16	3,000	3,300	640	Wood split slightly.		
4	.75	.57	2.5	4.5	No. 1	6.89	3/16	1,700	3,600	611			
4	.75	.57	2.5	4.5	No. 1	6.89	3/16	1,800	3,500	594			
5	.75	.57	8.0	4.5	No. 1	7.07	3/16	3,400	4,100	590			
5	.75	.57	8.0	4.5	No. 1	7.07	3/16	2,400	4,400	622			
5	.75	.57	8.0	4.5	No. 1	7.07	3/16	3,400	4,500	637			
6	.76	.56	8.8	4.5	No. 1	7.88	3/16	2,700	5,100	647			
6	.76	.56	8.8	4.5	No. 1	7.88	3/16	3,700	5,300	673			
6	.76	.56	8.8	4.5	No. 1	7.88	3/16	5,500	5,500	688			
8	.76	.56	4.1	4.5	No. 1	9.79	3/16	5,800	8,100	827			
8	.76	.56	4.1	4.5	No. 1	9.79	3/16	4,700	8,200	838			
8	.76	.56	4.1	4.5	No. 1	9.79	3/16	6,400	8,100	827			
9	.75	.56	4.9	4.5	No. 1	11.55	3/16	7,200	7,200	623			
9	.75	.56	4.9	4.5	No. 1	11.55	3/16	6,000	8,200	710			
9	.75	.56	4.9	4.5	No. 1	11.55	3/16	8,200	8,200	710			
10	.75	.56	5.5	4.5	No. 1	12.96	3/16	6,800	8,700	671			
10	.75	.56	5.5	4.5	No. 1	12.96	3/16	8,200	9,400	725			
10	.75	.56	5.5	4.5	No. 1	12.96	3/16	7,500	9,300	718			
12	.74	.56	6.0	4.5	No. 1	13.95	3/16	8,900	10,000	717			
12	.74	.56	6.0	4.5	No. 1	13.95	3/16	4,600	10,100	724			
12	.74	.56	6.0	4.5	No. 1	13.95	3/16	8,100	10,600	760			
8	.76	.58	4.1	4.5	No. 1	9.79	3/16	5,800	9,100	929			

This lag screw was screwed into the middle of the narrow side of a block 5" x 10" x 11". When tested the wood split to ends of block. Tested without plate A.

TESTS OF 1/2" LAG SCREWS IN DOUGLAS FIR.

5	.87	.68	2.9	4	No.1..	7.98	‡	4,800	8,700	1,900	4,800	605
5	.87	.68	2.9	4	No.1..	7.98	‡	4,800	4,800	2,200	4,800	590
5	.87	.68	2.9	4	No.1..	7.98	‡	4,400	3,400	2,200	4,800	605
7	.85	.68	2.9	4.5	No.1..	7.74	‡	6,800	4,800	1,800	6,600	858
7	.85	.68	2.9	4.5	No.1..	7.74	‡	6,800	4,100	2,800	6,400	827
7	.85	.68	2.9	4.5	No.1..	7.74	‡	6,500	5,300	3,200	6,500	840
6	.88	.65	3.5	4	No.1..	9.68	‡	8,400	7,100	3,900	8,400	868
6	.88	.65	3.5	4	No.1..	9.68	‡	8,000	7,000	4,400	8,800	909
6	.88	.65	3.5	4	No.1..	9.68	‡	8,200	6,200	3,400	9,100	940
8	.86	.70	4.4	4	No.1..	11.89	‡	11,500	9,000	4,500	12,200	1,080
8	.86	.70	4.4	4	No.1..	11.89	‡	12,200	9,300	5,500	12,600	1,060
8	.86	.70	4.4	4	No.1..	11.89	‡	12,600	9,600	6,800	12,800	1,080
9	.86	.68	4.4	4	No.2..	11.89	‡	11,300	9,500	7,300	11,300	951
9	.86	.68	4.4	4	No.2..	11.89	‡	9,600	7,300	6,400	11,600	976
9	.86	.68	4.4	4	No.2..	11.89	‡	11,300	7,800	5,000	12,300	1,080
10	.88	.68	5.1	4.5	No.1..	14.10	‡	11,600	10,000	7,300	12,000	851
10	.88	.68	5.1	4.5	No.1..	14.10	‡	13,200	10,100	7,300	13,200	986
10	.88	.68	5.1	4.5	No.1..	14.10	‡	13,300	10,400	6,800	13,300	943
8	.86	.70	4.4	4	No.1..	11.89	‡	8,800	7,800	5,400	10,000	941

For comparison of different pitches of threads.

This lag screw was screwed into the middle of the narrow side of a block 4" x 1 1/2" x 11 1/2". When tested the wood split to the ends of the block. Tested without plate A.

TESTS OF 1" LAG SCREWS IN DOUGLAS FIR.

6	.89	.80	3.5	3.5	No.1..	10.89	‡	5,700	5,500	5,300	6,400	588
6	.89	.80	3.5	3.5	No.1..	10.89	‡	6,400	5,700	4,200	6,400	686
6	.89	.80	3.5	3.5	No.1..	10.89	‡	6,600	5,600	4,200	7,100	662
7	.89	.85	4	4.5	No.1..	12.44	‡	7,900	6,500	6,000	8,200	659
7	.89	.85	4	4.5	No.1..	12.44	‡	7,400	6,600	5,100	8,200	647
7	.89	.85	4	4.5	No.1..	12.44	‡	8,200	7,500	6,400	8,200	659
8	.89	.80	4.4	3.5	No.1..	13.68	‡	7,500	6,500	3,000	7,500	548
8	.89	.80	4.4	3.5	No.1..	13.68	‡	7,900	7,200	3,000	7,800	584
8	.89	.80	4.4	3.5	No.1..	13.68	‡	7,600	6,200	2,900	7,600	556

TESTS OF 1" LAG SCREWS IN DOUGLAS FIR—Continued.

Length of screw.	Description of screw.				Diameter of bored hole.	Load at 1/2" pull. Total.	Load at 1/2" pull. Total.	Adhesive resistance.		Remarks.			
	Diameters.		Length of thread.	Threads per inch.				Kind of thread.	Resisting area.		Inch.	Total.	Per square inch.
	Body.	Root of thread.											
Inches.	Inch.	Inches.			Sq. inches.	Pounds.	Pounds.	Pounds.					
9	1.00	.82	4.2	4.5	No. 1.	13.19	7,600	7,600	Wood split slightly. For comparison of different pitches of threads.				
9	1.00	.82	4.2	4.5	No. 1.	13.19	6,000	5,900					
9	1.00	.82	4.2	4.5	No. 1.	13.19	7,900	7,900					
8	.99	.80	4.2	3.5	No. 1.	13.06	7,300	7,500	This lag screw was screwed into the middle of the narrow side of a block 6 1/2" x 19" x 11". When tested the wood split to ends of block. Tested without plate A. Tested same as above, but in block 6 1/2" x 19" x 11". Wood split to ends of block.				
8	.99	.80	4.2	3.5	No. 1.	13.06	6,800	7,600					
8	.99	.80	4.2	3.5	No. 1.	13.06	7,000	7,300					
8	.99	.80	4.4	3.5	No. 1.	13.68	8,200	9,100	665				
8	.99	.80	4.4	3.5	No. 1.	13.68	9,800	10,800	768				

TESTS OF 1/2" LAG SCREWS IN WHITE OAK.

[Tested without plate A, except where noted.]

4	.49	.37	2.3	5	No. 1.	3.54	5,000	3,500	1,000	5,600	1,580
4	.49	.37	2.3	5	No. 1.	3.54	5,500	3,600	800	5,800	1,640
4	.49	.37	2.3	5	No. 1.	3.54	5,300	3,200	1,200	6,400	1,810
4 1/2	.49	.37	2.8	5	No. 1.	4.31	6,000	5,200	700	6,800	1,460
4 1/2	.49	.37	2.8	5	No. 1.	4.31	6,200	4,400	1,400	6,700	1,550
4 1/2	.49	.37	2.8	5	No. 1.	4.31	6,100	4,500	2,000	6,400	1,480
5	.48	.37	2.9	5	No. 1.	4.37	6,800	5,000	1,500	7,200	1,650
5	.48	.37	2.9	5	No. 1.	4.37	7,500	4,100	1,200	7,000	1,900
5	.48	.37	2.9	5	No. 1.	4.37	7,500	5,800	2,900	7,500	1,720



54	.46	.37	2.9	6	No. 2..	4.19	†	5,900	3,200	1,000	6,200	1,480	
54	.46	.37	2.9	6	No. 2..	4.19	†	4,100	3,500	1,000	5,700	1,360	
54	.46	.37	2.9	6	No. 2..	4.19	†	5,200	4,200	2,000	6,400	1,580	
6	.48	.37	3	64	No. 2..	4.52	†	6,200	3,600	1,000	7,500	1,660	
6	.48	.37	3	64	No. 2..	4.52	†	5,900	4,200	1,100	7,200	1,560	
6	.48	.37	3	64	No. 2..	4.52	†	8,300	3,600	2,500	8,300	1,840	
7	.49	.37	3	5	No. 1..	4.62	†	Two lag screws broke at 7,800 pounds each in a 1/2" hole. Tensile strength = 67,900 pounds per square inch at root of thread.					Do.
64	.48	.38	3.5	6.5	No. 2..	5.28	†	8,400	8,200	2,300	8,600	1,680	
64	.48	.38	3.5	6.5	No. 2..	5.28	†	8,900	6,300	2,400	8,800	1,670	
64	.48	.38	3.5	6.5	No. 2..	5.28	†	Steel screw. Broke at 9,300 pounds = 82,020 pounds per square inch at root of thread.					Do.
8	.48	.37	3.5	5	No. 1..	5.28	†	Broke at 7,400 pounds in a 1/2" hole. Tensile strength = 68,860 pounds per square inch at root of thread.					Do.

Plate A used.  
Do.  
Do.

Plate A used.  
Do.

TESTS OF 1/2" LAG SCREWS IN WHITE OAK.  
[Tested without plate A, except where noted.]

34	.62	.47	2	5	No. 2..	3.90	†	3,500	2,300	900	4,700	1,210
34	.62	.47	2	5	No. 2..	3.90	†	3,000	2,500	1,000	5,200	1,380
34	.62	.47	2	5	No. 2..	3.90	†	4,100	2,400	1,300	5,200	1,380
4	.61	.48	2.2	5	No. 2..	4.22	†	4,000	2,400	900	5,300	1,260
4	.61	.48	2.2	5	No. 2..	4.22	†	4,700	3,300	1,600	5,500	1,300
4	.61	.48	2.2	5	No. 2..	4.22	†	4,000	3,200	1,800	5,800	1,280
41	.62	.50	2.4	5	No. 2..	4.67	†	5,300	3,700	1,300	6,400	1,370
41	.62	.50	2.4	5	No. 2..	4.67	†	5,400	4,500	1,500	6,100	1,310
41	.62	.50	2.4	5	No. 2..	4.67	†	5,400	4,300	1,500	6,100	1,310
5	.61	.48	3	5	No. 1..	5.75	†	7,100	5,100	2,000	7,600	1,820
5	.61	.48	3	5	No. 1..	5.75	†	7,900	7,500	2,700	8,500	1,480
5	.61	.48	3	5	No. 1..	5.75	†	8,100	6,200	3,300	8,100	1,410
54	.60	.46	3	5	No. 2..	5.66	†	7,200	4,300	1,900	7,300	1,280
54	.60	.46	3	5	No. 2..	5.66	†	7,200	4,500	1,700	7,200	1,270
54	.60	.46	3	5	No. 2..	5.66	†	7,200	5,200	1,900	7,200	1,270
6	.60	.47	3.5	5	No. 1..	6.60	†	8,400	4,300	2,300	10,200	1,560
6	.60	.47	3.5	5	No. 1..	6.60	†	9,700	6,300	2,800	9,700	1,470
6	.60	.47	3.5	5	No. 1..	6.60	†	7,100	5,500	2,000	9,600	1,450

Plate A used.  
Do.

TESTS OF 1/2" LAG SCREWS IN WHITE OAK—Continued.

Length of screw.	Description of screw.					Load at 1/2" pull. Total.	Load at 1/2" pull. Total.	Load at 1/2" pull. Total.	Adhesive resistance.		Remarks.			
	Diameters.		Length of thread.	Kind of thread.	Resisting area.				Diameter of bored hole.	Pounds.		Pounds.	Total.	Per square inch.
	Body.	Root of thread.												
7	.61	.46	3.9	5 No. 1..	7.47	7.90	4,100	2,300	8,800	1,180	Plate A used. Do. Do.			
7	.61	.48	3.9	5 No. 1..	7.47	7,700	5,800	2,600	8,800	1,180				
7	.61	.46	3.9	5 No. 1..	7.47	8,500	6,200	2,800	8,500	1,140				
8	.62	.47	4.1	5 No. 1..	7.99	9,200	6,700	2,800	10,400	1,800	Do. Do. Do.			
8	.62	.47	4.1	5 No. 1..	7.99	7,800	5,800	3,200	9,500	1,190				
8	.62	.47	4.1	5 No. 1..	7.99	10,000	7,700	3,600	10,900	1,860				
10	.62	.49	5.1	5 No. 1..	9.88	11,500	8,200	4,200	11,500	1,160	Do. Do. Do.			
10	.62	.49	5.1	5 No. 1..	9.88	11,000	7,800	4,200	11,400	1,150				
10	.62	.49	5.1	5 No. 1..	9.88	9,800	6,400	3,500	10,600	1,067				
12	.62	.48	5.4	5 No. 1..	10.52	Broke at 11,700 pounds—tensile strength 64,640 pounds per square inch at root of thread.					Do.			
12	.62	.48	5.4	5 No. 1..	10.52	Broke at 11,600 pounds—tensile strength 64,080 pounds per square inch at root of thread.					Do.			

TESTS OF 1/2" LAG SCREWS IN WHITE OAK.

[Tested with plate A.]

44	.75	.57	2.5	4.5 No. 1..	5.89	8,500	6,700	3,500	8,800	1,490	Do. Do. Do.
44	.75	.57	2.5	4.5 No. 1..	5.89	9,200	7,200	4,400	9,300	1,560	
44	.75	.57	2.5	4.5 No. 1..	5.89	9,400	7,700	4,300	9,400	1,600	
5	.75	.57	3	4.5 No. 1..	7.07	9,300	7,900	3,600	9,700	1,370	Do. Do. Do.
5	.75	.57	3	4.5 No. 1..	7.07	9,300	8,500	4,800	9,900	1,400	
5	.75	.57	3	4.5 No. 1..	7.07	9,900	9,100	3,700	10,000	1,410	
6	.76	.56	3.8	4.5 No. 1..	7.88	10,100	8,900	4,800	10,100	1,280	Do. Do. Do.
6	.76	.56	3.8	4.5 No. 1..	7.88	8,900	8,000	4,800	9,800	1,240	
6	.76	.56	3.8	4.5 No. 1..	7.88	10,000	9,000	5,200	10,100	1,280	

TESTS OF 1" LAG SCREWS IN WHITE OAK.

[Tested with plate A.]

8	.76	.58	4.1	4.5	No.1..	9.79	1/2	13,700	9,200	6,700	13,700	1,400
8	.76	.58	4.1	4.5	No.1..	9.79	1/2	13,300	10,600	6,000	13,400	1,370
8	.76	.58	4.1	4.5	No.1..	9.79	1/2	10,900	8,900	5,400	12,100	1,240
9	.75	.56	4.9	4.5	No.1..	11.55	1/2	12,700	9,400	6,000	12,700	1,100
9	.75	.56	4.9	4.5	No.1..	11.55	1/2	12,200	9,200	6,600	12,200	1,060
9	.75	.56	4.9	4.5	No.1..	11.55	1/2	11,200	8,300	5,600	11,200	970
10	.75	.58	5.5	4.5	No.1..	12.96	1/2	12,100	8,200	5,100	12,800	950
10	.75	.58	5.5	4.5	No.1..	12.96	1/2	12,300	5,900	12,400	957	
10	.75	.58	5.5	4.5	No.1..	12.96	1/2	12,200	11,000	6,700	12,800	988
12	.74	.56	6	4.5	No.1..	13.95	1/2	14,500	14,000	7,300	14,700	1,050
12	.74	.56	6	4.5	No.1..	13.95	1/2	14,600	8,500	14,900	1,070	
12	.74	.56	6	4.5	No.1..	13.95	1/2	14,500	11,200	5,200	14,700	1,050
5	.87	.63	2.9	4	No.1..	7.93	1/2	9,800	7,500	4,400	10,500	1,320
5	.87	.63	2.9	4	No.1..	7.93	1/2	7,800	5,400	4,200	8,900	1,120
5	.87	.63	2.9	4	No.1..	7.93	1/2	9,500	5,900	4,500	9,900	1,250
6	.88	.65	3.5	4	No.1..	9.68	1/2	11,700	9,200	6,300	12,200	1,260
6	.88	.65	3.5	4	No.1..	9.68	1/2	10,800	9,200	6,200	11,400	1,180
6	.88	.65	3.5	4	No.1..	9.68	1/2	9,700	7,900	4,800	11,800	1,170
7	.85	.68	2.9	4.5	No.1..	7.74	1/2	8,600	5,500	3,400	9,400	1,210
7	.85	.68	2.9	4.5	No.1..	7.74	1/2	8,300	5,000	3,800	9,000	1,160
7	.85	.68	2.9	4.5	No.1..	7.74	1/2	8,000	6,400	3,400	8,600	1,110
8	.86	.70	4.4	4	No.1..	11.89	1/2	13,100	9,100	4,600	13,100	1,100
8	.86	.70	4.4	4	No.1..	11.89	1/2	13,900	10,000	6,700	14,000	1,180
8	.86	.70	4.4	4	No.1..	11.89	1/2	11,200	9,900	6,200	13,300	1,120
9	.86	.68	4.4	4	No.2..	11.89	1/2	11,500	10,200	4,900	12,000	1,010
9	.86	.68	4.4	4	No.2..	11.89	1/2	11,300	10,700	6,100	11,700	984
9	.86	.68	4.4	4	No.2..	11.89	1/2	11,600	10,400	6,400	12,700	1,070
10	.88	.68	5.1	4.5	No.1..	14.10	1/2	14,600	13,400	7,600	15,600	1,110
10	.88	.68	5.1	4.5	No.1..	14.10	1/2	14,000	11,800	8,500	14,300	1,010
10	.88	.68	5.1	4.5	No.1..	14.10	1/2	14,800	13,200	9,900	15,600	1,110

## TESTS OF 1" LAG SCREWS IN WHITE OAK.

[Tested with plate A.]

Length of screw.	Description of screw.						Load at 1/2" pull. Total.	Load at 3/4" pull. Total.	Load at 1" pull. Total.	Adhesive resistance.		Remarks.			
	Diameters.		Length of thread.	Threads of per inch.	Kind of thread.	Resisting area.				Diameter of bored hole.	Pounds.		Pounds.	Total.	Per square inch.
	Inch.	Root of thread.													
6	.99	.80	3.5	3.5	No. 1..	10.89	12.20	5,500	12,200	12,200	1,120				
6	.99	.80	3.5	3.5	No. 1..	10.89	14,700	7,400	14,700	14,700	1,350				
6	.99	.80	3.5	3.5	No. 1..	10.89	12,400	8,500	13,800	13,800	1,270				
7	.99	.85	4	4.5	No. 1..	12.44	14,900	5,700	14,700	14,700	1,180				
7	.99	.85	4	4.5	No. 1..	12.44	11,800	7,800	15,000	15,000	1,210				
7	.99	.85	4	4.5	No. 1..	12.44	11,500	14,900	16,100	16,100	1,290				
8	.99	.80	4.4	3.5	No. 1..	13.68	14,800	6,400	16,200	16,200	1,180				
8	.99	.80	4.4	3.5	No. 1..	13.68	15,200	6,900	15,500	15,500	1,130				
8	.99	.80	4.4	3.5	No. 1..	13.68	16,300	11,100	17,300	17,300	1,290				
9	1.00	.82	4.2	4.5	No. 1..	13.19	13,200	4,600	14,900	14,900	1,180				
9	1.00	.82	4.2	4.5	No. 1..	13.19	11,800	6,200	14,700	14,700	1,110				
9	1.00	.82	4.2	4.5	No. 1..	13.19	14,400	8,200	15,900	15,900	1,160				
8	.99	.80	4.2	3.5	No. 1..	13.06	15,100	7,400	16,400	16,400	1,180				
8	.99	.80	4.2	3.5	No. 1..	13.06	12,800	8,800	13,800	13,800	1,020				
8	.99	.80	4.2	3.5	No. 1..	13.06	12,600	6,800	13,600	13,600	1,040				

Tests of the adhesion of plain wrought-iron bolts with pointed ends, driven into Douglas fir and white-oak wood.

Tested in manner similar to that of lag screws.

Reinforcing plate "A" used.

Bolts driven into timber to a depth corresponding to the longest lag screws.

BOLTS DRIVEN INTO 8" x 8" x 4' STICKS OF DOUGLAS FIR.

Nominal diameter of bolt.	Actual diameter of bolt.	Depth of full-sized iron in wood.	Resisting area.	Diameter of bored hole.	Adhesive resistance.		Remarks.
					Total.	Per square inch.	
<i>Inch.</i>	<i>Inch.</i>	<i>Inches.</i>	<i>Sq. ins.</i>	<i>Inch.</i>	<i>Pounds.</i>	<i>Pounds.</i>	
1	.99	4.4	13.68	$\frac{1}{2}$	3,900	285	
1	.99	4.4	13.68	$\frac{1}{2}$	6,700	490	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	5,000	359	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	6,800	488	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	4,800	343	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	4,200	298	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	6,100	426	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	3,600	326	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	5,800	526	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	6,700	607	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	2,100	374	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	2,900	517	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	3,500	624	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	3,600	643	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	4,150	741	
$\frac{1}{4}$	.51	3.5	5.61	0	4,100	714	No hole bored.
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	8,400	762	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	7,200	653	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	9,400	656	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	8,600	606	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	8,000	574	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	9,700	696	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	7,000	502	
1	.99	4.4	13.68	$\frac{1}{2}$	9,900	724	
1	.99	4.4	13.68	$\frac{1}{2}$	7,500	548	

BOLTS DRIVEN INTO 11" x 4" x 4' STICKS OF WHITE OAK.

1	.99	4.4	13.68	$\frac{1}{2}$	10,800	789	
1	.99	4.4	13.68	$\frac{1}{2}$	14,300	1,050	
1	.99	4.4	13.68	$\frac{1}{2}$	14,100	1,030	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	12,000	861	Split slightly.
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	13,200	947	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	13,200	947	
$\frac{1}{2}$	.87	5.1	13.94	$\frac{1}{2}$	5,200	373	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	11,800	789	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	11,700	816	
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$	6,400	447	Split the wood.
$\frac{3}{4}$	.76	6	14.33	$\frac{1}{2}$			
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$			Do.
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	12,900	1,120	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	13,300	1,210	
$\frac{1}{2}$	.65	5.4	11.03	$\frac{1}{2}$	13,200	1,200	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	6,400	1,140	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	7,200	1,280	
$\frac{1}{4}$	.51	3.5	5.61	$\frac{1}{2}$	7,400	1,320	

**Adhesion of lag screws in yellow pine wood.**  
**Screws driven in bored holes, perpendicular to the grain.**

Diameter—			Depth in wood.	Resisting area.	Adhesive resistance.		Remarks.
Of body.	At root of thread.	Bored hole.			Total.	Per square inch.	
<i>Inch.</i> .75	<i>Inch.</i> .63	<i>Inch.</i> .625	<i>Inches.</i> 4.5	<i>Sq. inches.</i> 10.60	<i>Pounds.</i> 8,620	<i>Pounds.</i> 818	Pulled off head of screw. Do.
.75	.63	.625	4.5	10.60	7,890	744	
Slot in lag screws filled with a steel key.							
.75	.63	.625	4.5	10.60	8,200	774	Pulled screw out of the wood. Do.
.75	.63	.625	5.625	13.25	10,300	777	

---

---


**TENSILE TESTS OF REGULATION STEEL NICKEL-  
PLATED BIT**

**AND**

**A MAGNOLIA METAL BIT.**

---


---







Tests of Metals, 1902.

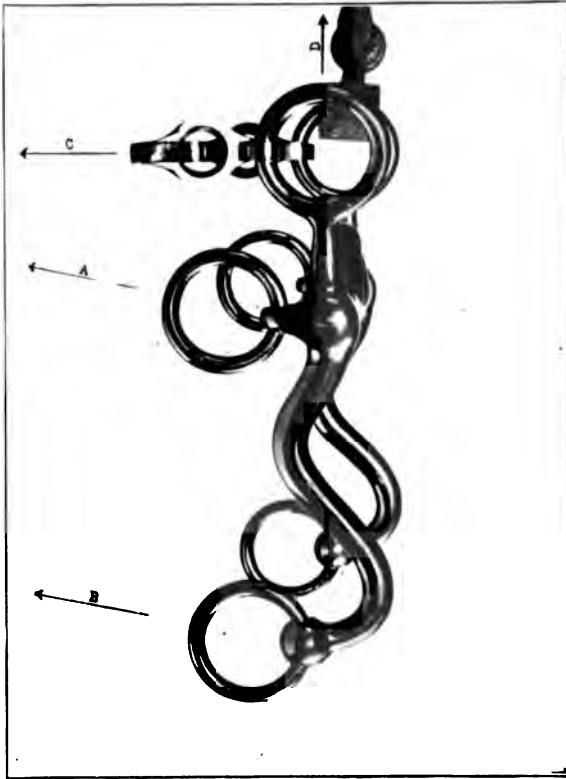

PHOTOGRAPH SHOWING DIRECTIONS OF APPLYING LOADS.

## BITS.

## TEST OF STEEL BIT.

Part tested.	Diameter of wire.	Tensile strength.	Remarks.
	<i>Inch.</i>	<i>Pounds.</i>	
A .....	.181	2,790	Rings decidedly distorted at 700 to 800 pounds.
A .....	.181	1,920	Fractured along scarf weld.
B .....	.185	2,580	Fractured the ring.
B .....	.185	2,610	Do.
C .....	.....	268	Pulled curb attachment from eye in bit.
C .....	.....	264	Do.
D .....	a .235	3,455	Fractured at junction of mouthpiece and branch.
D .....	a .285	3,640	Do.

## TEST OF MAGNOLIA METAL BIT.

A .....	.182	1,864	Rings decidedly distorted at 450 pounds.
A .....	.182	1,456	Do.
B .....	.185	1,566	Fractured branch of the bit.
B .....	.185	2,215	Fractured eye, carrying ring.
C .....	.....	218	Pulled curb attachment from eye in bit.
C .....	.....	246	Do.
D .....	a .25	2,740	Fractured the eye.
D .....	a .25	2,545	Do.
Mouthpiece .	a .496	8,200	Appearance of fracture, light lemon yellow, uniform. Sectional area, minimum diameter of mouthpiece, .193 square inch. Tensile strength, no correction made for curved shape, 42,490 pounds per square inch.

a Diameter of metal.

## CARTRIDGE AND TARGET CLOTH.

Test No. 10453.

## CARTRIDGE CLOTH.

Five samples received: Two samples, Nos. 1 and 8, from J. Wanamaker. Three samples, "S. C." and "F. & S.," from Germany, delivered on contract at New York Arsenal.

Samples 2" wide by 10" long between the jaws of the testing machine.

Marks.	Direction tested.	Elongation in 8 inches.	Tensile strength.	Remarks.
No. 1.....	Filling .....	<i>Inches.</i> 1.10	<i>Pounds.</i> 120	
Do .....	.....do .....	1.13	128	
No. 8.....	.....do .....	.98	145	
Do .....	.....do .....	.88	138	

Samples 2" wide by 3" long between jaws of the testing machine.

No. 1.....	Warp .....		158	From J. Wanamaker.
Do .....	Filling .....		182	Do.
No. 8.....	Warp .....		178	Do.
Do .....	Filling .....		143	Do.
S. C.....	Unknown .....		177	From Germany.
F. & S.....	.....do .....		98	Do.
Do .....	Warp .....		80	Do.

Test No. 10455.

## TARGET CLOTH.

Two pieces of cloth tested. Two samples taken from warp and two from filling of each piece.

Samples 2" wide by 10" long between the jaws of the testing machine.

Marks.	Direction tested.	Elongation in 8 inches.	Tensile strength.
No. 9.....	Warp .....	<i>Inches.</i> 1.17	<i>Pounds.</i> 111
Do .....	.....do .....	1.06	114
Do .....	Filling .....	1.27	114
Do .....	.....do .....	1.28	113
No. 10.....	Warp .....	1.16	154
Do .....	.....do .....	1.09	151
Do .....	Filling .....	.96	138
Do .....	.....do .....	.88	130

BLUE PRINT PAPER.

Samples 1" wide by 3" long between the jaws of the testing machine.

No. of sample.	Thick-ness.	Tensile strength.	Mean.	Remarks.
2	.046	<i>Pounds.</i> 39.5	<i>Pounds.</i> -----	
		45	-----	
		43	42.5	
3	.049	27.5	-----	
		26	-----	
		27.5	27	
4	.062	28.5	-----	
		28	-----	
		27.5	28	
5	.063	25	-----	
		25.5	-----	
		26.5	25½	
6	.087	29	-----	
		29	-----	
		32	30	




---

---

**CHEMICAL ANALYSES.**

---

---





CHEMICAL ANALYSES.

BRASS, ETC.

Description.	Copper.	Tin.	Zinc.	Lead.	Anti- mony.	Nickel.
Brass wire from Springfield Ar- mory.....	60.50	.....	39.50	.....	.....	.....
Backing of embossed belt buckle, U. S.....	.....	40.00	.....	60.00	.....	.....
White metal for yacht hand-rail stanchion.....	48.44	.....	36.58	.....	.....	14.82
Torrey antifriction metal.....	.....	.....	.....	81.06	19.00	.....

STEELS FROM SPRINGFIELD ARMORY.

Description.	Marks.	Carbon.	Manga- nese.	Silicon.	Sulphur.	Phos- phorus.	Copper.
Receiver steel .....	M1	.305	.995	.106	.034	.040	.....
Do.....	M2	.308	.990	.105	.036	.036	.....
Do.....	M3	.316	1.083	.103	.036	.039	.....
Do.....	M4	.308	1.000	.109	.037	.036	.....
Do.....	M5	.360	1.020	.114	.030	.038	.....
Do.....		.305	.990	.030	.056	.090	.....
Receiver steel, old stock .....		.120	.830	.035	.076	.062	.....
"Carpenter" .....		.470	1.550	.194	.032	.034	.110
Bayonet steel.....		1.040	.300	.240	.020	.015	.....
Do.....		1.02	.410	.166	.040	.030	.....
Do.....		.320	.680	.240	.035	.037	.....
Do.....	1	.964	.235	.060	.030	.015	.....
Do.....	2	1.000	.310	.106	.025	.014	.....
Russian steel.....		.950	.180	.162	.015	.006	.....

MISCELLANEOUS STEELS.

Rimbase of hardened 16" trunnion hoop, Water- vliet Arsenal .....		.580	.700	.244	.020	.034	.095
Pressure-gauge plug, Frankford Arsenal.....		1.115	.300	.245	.010	.016	.....

## PRIVATE TESTS.

## PRIVATE TESTS.

TESTS MADE FOR PRIVATE PARTIES DURING THE FISCAL YEAR  
ENDED JUNE 30, 1902.

Date.	Material.	For whom tested.		
		Name.	City.	State.
1901.				
July 2	Steel bars	Boston Elevated Railway Co	Boston	Mass.
	do	Wetherell Brothers	do	Mass.
3	do	New England Bolt and Nut Co.	do	Mass.
23	Steel specimens	United States Projectile Co	New York	N. Y.
Aug. 5	Steel anchor bolt.	New England Bolt and Nut Co.	Boston	Mass.
	"Fibre"	Laminar Fibre Co	North Cambridge.	Mass.
8	Rubber belting.	Revere Rubber Co	Chelsea	Mass.
12	Gauges	American Steam Gauge and Valve Co.	Jamaica Plain.	Mass.
15	Belting and canvas.	William T. Plummer	Boston	Mass.
17	Brick	New England Fire Proofing Co.	do	Mass.
28	Cast iron	Wm. Allen & Sons	Worcester	Mass.
31	Shackles	Fletcher & Crowell Co	Portland	Me.
	Concrete	Wm. Wirt Clarke & Sons.	Baltimore	Md.
Sept. 3	do	do	do	Md.
7	Riveted joint.	Edward Kendall & Sons	Cambridgeport	Mass.
12	Hardened blocks.	Chapman Double Ball Shafting Bearing Co.	Boston.	Mass.
13	Cast iron	Wm. Allen & Sons	Worcester	Mass.
	Spliced belting.	Main Belting Co.	Boston	Mass.
	Sheaves	Boston and Lockport Block Co.	do	Mass.
24	Cast iron	Golding & Co	do	Mass.
27	Paving bricks	D. J. Curtis & Son	Springfield	Mass.
28	Column	Lally Patent Column Co.	Waltham	Mass.
Oct. 11	Cast iron	Barbour-Stockwell Co	Cambridgeport	Mass.
12	Wire rope	Carson Trench Machine Co.	Boston	Mass.
16	Stone slabs	Daniel Kilpatrick	Morning Sun	Iowa.
	Cotton belt.	The Carton Belting Co.	Boston	Mass.
19	Whiting	Hood Rubber Co.	Watertown	Mass.
24	Cast iron	John Souther & Co.	Boston	Mass.
26	Sandstone	Barclay Bros.	Sinnamahoning	Pa.
29	Cotton fiber	American Rubber Tire Co.	Boston	Mass.
	Rubber	Hood Rubber Co.	Watertown	Mass.
Nov. 4	Crude rubber	do	do	Mass.
8	Barrel steel.	Savage Arms Co	Utica	N. Y.
13	Steel casting	Fiske Brick Co.	Boston	Mass.
	Cement	The Alpena Portland Cement Co	Alpena	Mich.
26	U bolt	Boston and Albany Railroad Co.	Boston	Mass.
Dec. 4	Cast iron	Whittier Machine Co	do	Mass.
	Hooks	Boston and Lockport Block Co.	do	Mass.
11	Wire nails	J. C. Pearson Co.	do	Mass.
19	Cotton duck, etc	Catlin & Co	do	Mass.
20	Marble	Vermont Marble Co.	Proctor	Vt.
23	Bricks	Washington Hydraulic Press Brick Co.	Washington	D. C.
26	Steel	E. D. Leavitt.	Cambridge	Mass.
27	Rubber	Hood Rubber Co.	Watertown	Mass.
31	Bricks	New England Brick Co	Boston.	Mass.
1902.				
Jan. 6	Wire nails	J. C. Pearson Co	do	Mass.
7	Rubber	Hood Rubber Co.	Watertown	Mass.
11	Granite	Milford Pink Granite Construction Co.	Milford	Mass.
18	Shackles.	Fletcher & Crowell Co.	Portland.	Me.
22	Push bars	Boston Transit Commission.	Boston.	Mass.
23	Iron bar	New England Bolt and Nut Co.	do	Mass.
27	Semi-steel casting.	Fiske Brick Co.	do	Mass.
Feb. 7	Concrete	New York, New Haven and Hartford Railroad Co.	Bridgeport	Conn.
8	Steel specimens	Savage Arms Co	Utica	N. Y.
	Steel bars	Boston Elevated Railway Co.	Boston	Mass.
10	do	Sullivan Machinery Co	Claremont	N. H.
11	Artificial stone	Murdoch Parlor Grate Co	Boston.	Mass.
13	Rubber shoe.	Hood Rubber Co.	Watertown	Mass.
20	Cement briquettes.	Fiske & Co.	Boston.	Mass.
21	Building blocks	Pittsburg Brick and Pipe Co.	Pittsburg	Kans.
	Stone	New York, New Haven and Hartford Railroad Co.	Bridgeport	Conn.
24	Limestone	Standard Plaster Co	Buffalo	N. Y.
Mar. 1	Shackles.	Fletcher & Crowell Co.	Portland	Me.
6	Boiler plate	Wm. Allen & Sons Co.	Worcester	Mass.
7	Steel bars	Fore River Ship and Engine Co.	Quincy	Mass.
11	Steel plates	New England Structural Co	Boston	Mass.

TESTS MADE FOR PRIVATE PARTIES, ETC.—Continued.

Date.	Material.	For whom tested.		
		Name.	City.	State.
1902.				
Mar. 17	Cement.....	Murlock Parlor Grate Co.....	Boston.....	Mass.
20	Iron.....	Laconia Car Co. Works.....	do.....	Mass.
24	Pipe fittings.....	The Perfection Cleanout Specialty Co.	Haverhill.....	Mass.
	Cast iron.....	Sheaff & Jaastad.....	Boston.....	Mass.
26	Hollow bricks.....	George A. Fuller Co.....	do.....	Mass.
	Manhole covers.....	City of Boston.....	do.....	Mass.
28	Cast iron.....	Hyde Windlass Co.....	Bath.....	Me.
29	Steel plate.....	American Locomotive Co.....	Schenectady.....	N. Y.
Apr. 3	Concrete.....	Frank A. Hinds.....	Watertown.....	N. Y.
9	Rubber, belting, etc.	Boston Woven Hose and Rubber Co.	Boston.....	Mass.
11	Wrought iron.....	Laconia Car Co. Works.....	do.....	Mass.
15	Cast iron.....	Hyde Windlass Co.....	Bath.....	Me.
28	do.....	Whittier Machine Co.....	Boston.....	Mass.
May 2	Steel specimens.....	Remington Arms Co.....	Illon.....	N. Y.
	do.....	Marlin Firearms Co.....	New Haven.....	Conn.
6	Cast iron.....	Bath Iron Works.....	Bath.....	Me.
7	Rubber spring.....	Boston Woven Hose and Rubber Co.	Boston.....	Mass.
20	Chain.....	International Paper Co.....	Bellows Falls.....	Vt.
	Turnbuckles.....	The Thomas Laughlin Co.....	Portland.....	Me.
22	Tie rods.....	Boston Elevated Railway Co.....	Boston.....	Mass.
	Cast-iron lifting finger.	Fiske Brick Co.....	do.....	Mass.
	Stay bolt iron.....	Houghton & Richards.....	do.....	Mass.
23	Cotton fleece.....	Hood Rubber Co.....	Watertown.....	Mass.
24	Concrete.....	New York, New Haven and Hartford Railroad Co	Bridgeport.....	Conn.
29	Litholite.....	Uriah Cummings.....	Akron.....	N. Y.
	Stone.....	Edw. W. Serrell.....	Washington.....	D. C.
	Sandstone.....	Traverse Bay Red Stone Co.....	Calumet.....	Mich.
June 8	Steel specimen.....	The Savage Arms Co.....	Utica.....	N. Y.
4	Coated nails.....	J. C. Pearson Co.....	Boston.....	Mass.
	Cast iron.....	Bath Iron Works.....	Bath.....	Me.
	Fabric.....	Hood Rubber Co.....	Watertown.....	Mass.
	Steel rods in concrete.	Boston Transit Commission.....	Boston.....	Mass.
	Rail shoe plates.....	The Weber Railway Joint Manufacturing Co.	New York.....	N. Y.
7	Lag screw expansion sleeve nuts, etc.	Stannard Manufacturing Co.....	Springfield.....	Mass.
21	Steel rods in concrete, etc.	Boston Transit Commission.....	Boston.....	Mass.
24	Shackles.....	Fletcher & Crowell Co.....	Portland.....	Me.
	Rubber belting.....	Revere Rubber Co.....	Chelsea.....	Mass.
30	Nails.....	J. C. Pearson Co.....	Boston.....	Mass.



# INDEX.

	Page
<b>Analyses, chemical:</b>	
Belt buckle, backing of .....	587
Brass, extruded metal, from angle bar .....	82
Brass wire .....	587
Bronze from old 12-pounder guns .....	71
Cast iron—	
3-inch shell .....	61
Track block .....	128
Cement .....	512
Slate .....	357
Steel—	
Bayonet .....	587
Carbon-steel ingot .....	199
“Carpenter” .....	587
Endurance shafts .....	277
Nickel-steel ingot .....	199
Pressure-gauge plug .....	587
Receiver steel .....	587
Receiver steel, old stock .....	587
Rocker block .....	128
Russian .....	587
Streaked gun hoop .....	108
Track blocks .....	128
Trunnion hoop .....	587
Torrey antifriction metal .....	587
White metal .....	587
Bits, steel, and magnolia metal .....	581
Blue-print paper .....	583
Bolts, adhesion of, in wood .....	576
Brass, extruded metal, from angle bar .....	82
Bricks:	
Absorption tests .....	341-344
Compressive elastic properties .....	345-352
Tabulation of elastic properties .....	353
Bronze:	
For gun carriages—	
Phosphor-bronze ingot .....	67
75-millimeter mountain-gun carriage .....	67
From old 12-pounder guns—	
Remarks .....	71
Chemical analyses .....	71
Tensile tests .....	72-80
Tabulation .....	81
Buffer bracket hook, steel casting, for 10-inch barbette carriage .....	48
Carbon-steel ingot:	
Chemical analysis .....	199
Diagrams showing manner of cutting up .....	200, 201, 204
Tensile tests, metal in natural state and after heating and quenching .....	205-222
Tabulation .....	223
Tensile tests, metal drawn down under the hammer .....	243, 244
Bending test .....	244


	Page.
<b>Cast iron:</b>	
From Watertown Arsenal, chemical analyses and tensile tests .....	61-63
Traversing intermediate bevel gear .....	63
Racer of 12-inch mortar carriage .....	64
12-inch mortar shell .....	101, 102
16-inch rifle shot .....	103, 104
Water pipe from city of Boston .....	64
Shot and shell from Petersburg Iron Works .....	63
For calibration of testing machine at works of Robert Poole & Son Company .....	64
Track block .....	63, 123-164
Pig irons .....	63
<b>Cement:</b>	
4-inch cubes of neat cement, different brands, compression tests .....	369-381
Retarded sets, compression tests .....	381, 382
Cements which set in air at different temperatures—	
Compression tests .....	383-415
Résumé of results .....	416-421
Comparative tests on cement and mortar set in air and in water—	
Compression tests .....	422-442
Summary .....	443
Material set in air or in water, followed by different periods of exposure under reverse conditions, compression tests .....	444-450
Cement and mortar after heating—	
Remarks .....	451
Loss in weight .....	452-457
Compression tests .....	458-466
Cement and mortar prisms—	
Compressive elastic properties .....	467-505
Tabulation .....	506, 507
Cement-mortar cubes from U. S. Engineer Corps, compression tests ...	512
Grouts—	
Remarks .....	508
Compression tests .....	509, 510
Peninsular brand—	
Tensile tests .....	511
Compression tests .....	511
Fineness .....	511
Specific gravity .....	511
Chemical analysis .....	512
Cloth, cartridge and target .....	582
<b>Concrete:</b>	
12-inch cubes from Watertown Arsenal .....	513
12-inch cubes from Boston Elevated Railway Company .....	514
Copper cylinders for pressure gauges .....	85, 86
<b>Endurance shafts:</b>	
Endurance tests .....	259-274
Tabulation .....	275, 276
Metal from shafts, tensile tests—	
Solid specimens .....	281-314
Tabulation .....	315, 316
Annular specimens .....	317-334
Tabulation .....	335
Chemical analyses .....	277
Extruded brass from angle bar .....	82
<b>Forged steel:</b>	
Reinforcing plate, 12-inch mortar carriage .....	50
Track block .....	123-164
Glass, transverse tests .....	517
<b>Gun carriages:</b>	
Bronze for .....	67
Buffer bracket hook for .....	48
Helical springs for .....	89-92
Piston rods for (proof stresses) .....	48
Retraction hook for .....	48
Wire retraction ropes for (proof stresses) .....	48


	Page.
Gun hoops, hydrostatic tests of:	
Remarks .....	107
Tensile specimen tests .....	108
General results .....	108, 109
Comparison of results .....	109
Chemical analysis of streaked hoop .....	108
Details of tests—	
Streaked hoop .....	110-113
Unstreaked hoop .....	113-117
Photographs .....	119
Gun specimens:	
75-millimeter mountain guns—	
Body .....	13
Breechblock .....	14
Block carrier .....	15
Tabulation .....	15
6-inch R. F. guns—	
Tubes .....	19, 20
Jackets .....	21-23
Hoop .....	24
Breechblock .....	25
Tabulation .....	25
10-inch steel B. L. rifles—	
Tube .....	29
Jackets .....	30, 31
Hoop .....	32
Breechblock .....	33
Tabulation .....	33
12-inch steel B. L. rifles—	
Tubes .....	37, 38
Jackets .....	39-41
Hoop .....	42
Breechblock .....	43
Tabulation .....	43
16-inch steel B. L. rifle, forging .....	47
Helical springs. ( <i>See Springs.</i> )	
Hooks:	
Buffer bracket for 10-inch barbette carriage .....	48
Retraction for 10-inch barbette carriage .....	48
Hoops. ( <i>See Gun hoops.</i> )	
Hydrostatic tests of gun hoops:	
Remarks .....	107
Tensile specimen tests .....	108
General results .....	108, 109
Comparison of results .....	109
Chemical analysis of streaked hoop .....	108
Details of tests—	
Streaked hoop .....	110-113
Unstreaked hoop .....	113-117
Photographs .....	119
Ingots, carbon and nickel steel .....	199-244
Initial strains in 16-inch cast-iron shot .....	103, 104
Lag screws, adhesion of, in wood .....	565-575, 577
Magnolia metal and steel bits .....	581
Mortar. ( <i>See Cement.</i> )	
Mortar carriages:	
Recoil cylinder, fractured, cast steel .....	49
Reinforcing plate, 12-inch mortar carriage, forged steel .....	50
Racer, 12-inch mortar carriage .....	64
Helical springs for 10-inch mortar carriages .....	95-98
Helical springs for 7-inch mortar carriages .....	93
Old helical springs from 7-inch mortar carriages .....	94
Mortar shell, 12-inch, cast iron, compressive movement of base plug, etc. ....	101, 102
New York and Brooklyn Bridge, suspender rods .....	247-256
Nickel-steel ingot:	
Chemical analysis .....	199
Diagrams showing manner of cutting up .....	202-204

	Page.
Nickel-steel ingot—Continued.	
Tensile tests, metal in natural state and after heating and quenching...	224-241
Tabulation.....	242
Paper, blue print.....	583
Piston rods (proof stresses).....	48
Pressure gauges, copper cylinders for.....	85, 86
Private tests, list of.....	588, 589
Recoil cylinder, fractured, from 12-inch mortar carriage.....	49
Reenforcing plate, 12-inch mortar carriage.....	50
Retraction hook, 10-inch barbette carriage.....	48
Retraction ropes (proof stresses).....	48
Rocker block and track blocks:	
Blocks of full length—	
Remarks.....	123-125
General results of compression tests.....	125-128
Details of compression tests.....	129-140
Blocks of reduced length—	
Remarks.....	141-143
General results of compression tests.....	143-145
Details of compression tests.....	146-154
Chemical analyses.....	128
Metal from rocker and track blocks—	
Tensile tests.....	63, 155-159
Tabulation.....	159
Compression tests.....	160-164
Tabulation.....	164
Ropes, retraction for gun carriages (proof stresses).....	48
Rotating shafts, steel. ( <i>See</i> Endurance shafts.)	
Shells for high explosives, tensile tests of metal from.....	50
Shell, 12-inch mortar, compressive movement of base plug, etc.....	101, 102
Shot, 16-inch cast iron, initial strains in.....	103, 104
Slate,—slabs, cubes, and roofing:	
Chemical analyses.....	357
Slabs, compression tests.....	357, 363-366
Cubes, compression tests.....	358
Roofing, transverse tests.....	359
Treads—	
Transverse tests, summary.....	359
Transverse tests, details.....	360-362
Springs for gun carriages:	
75-millimeter mountain gun carriage.....	89-91
5-inch R. F. gun carriage.....	92
7-inch mortar carriage.....	93
7-inch mortar carriage (old springs).....	94
10-inch mortar carriage.....	95-98
Steel bars:	
Carbon steel, metal from ingot.....	205-222, 243, 244
Nickel steel, metal from ingot.....	224-241
Piston rods (proof stresses).....	48
Reenforcing plate, 12-inch mortar carriage.....	50
Rotating shafts, metal from.....	281-335
Shells for high explosives, metal from.....	50
Steel specimens from Navy Department.....	51
Steel for yokes, from Navy Department.....	55-58
Suspender rods, New York and Brooklyn Bridge.....	247-256
Steel and magnolia metal bits.....	581
Steel castings:	
Fractured recoil cylinder from 12-inch mortar carriage.....	49
For gun carriages—	
Retraction and buffer bracket hooks for 10-inch barbette carriage ..	48
Rocker block and track blocks.....	123-164
Steel, carbon and nickel steel ingots.....	199-244
Steel forgings:	
Reenforcing plate for 12-inch mortar carriage.....	50
Track block.....	123-164
Steel specimens from Navy Department.....	51
Steel for yokes, from Navy Department.....	55-58




	Page.
Suspender rods from New York and Brooklyn Bridge:	
Remarks .....	247, 256
Tensile tests of rods .....	247-255
Tensile tests of specimens from the rods .....	256
Bending test .....	256
Torrey antifriction metal, chemical analysis .....	587
Track blocks. (See Rocker block, etc.)	
Water pipe from city of Boston, cast iron .....	64
White metal, chemical analysis .....	587
Wire retraction ropes (proof stresses) .....	48
Wood:	
Adhesion of lag screws and bolts in .....	565-577
Douglas fir—	
Transverse tests .....	521-541
Tabulation .....	542
Shearing tests .....	552-554
Heat conductivity .....	555-560
Compression tests, cores of charred sticks .....	560
Expansion after submersion .....	561
White oak—	
Transverse tests .....	543-551
Tabulation .....	551
Wrought iron:	
From Engineer Corps, U. S. Army .....	58
Rolled bars in natural state and after heating and quenching, first series—	
Common refined .....	167
Best puddled .....	167-169, 172, 173
Burden's best .....	169-171, 174
Norway .....	171, 172, 175
Rolled bars after heating and quenching, second series—	
Common refined .....	176-178
Best puddled .....	179-181
Burden's best .....	182-184
Norway .....	185-187
Tabulation .....	188
Rolled bars in natural state and after heating and quenching, third series—	
Best puddled .....	189-194
Tabulation .....	195
Yokes, steel for, from Navy Department .....	55-58









89080449168



b89080449168a

